

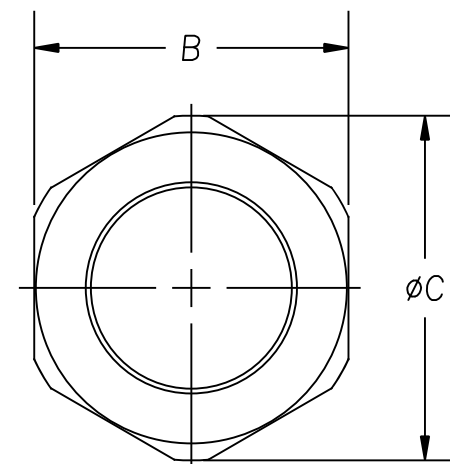


DIMENSIONS

A	.940"
B	1-9/16" HEX
C	ø1.715"
D	ø1.000"
F	ø1.547" BEFORE KNURL
* G	35 DEG.
H	30° CHAMF. TO DIA. "F" 1.547" (TYP. BOTH SIDES OF HEX)
* J	ø1.320"
K	.375"
L	.38"
* R	.090"
* T	1-3/8"-16 UN-2B THREAD
V	20 TPI KNURL 5/16" WIDE

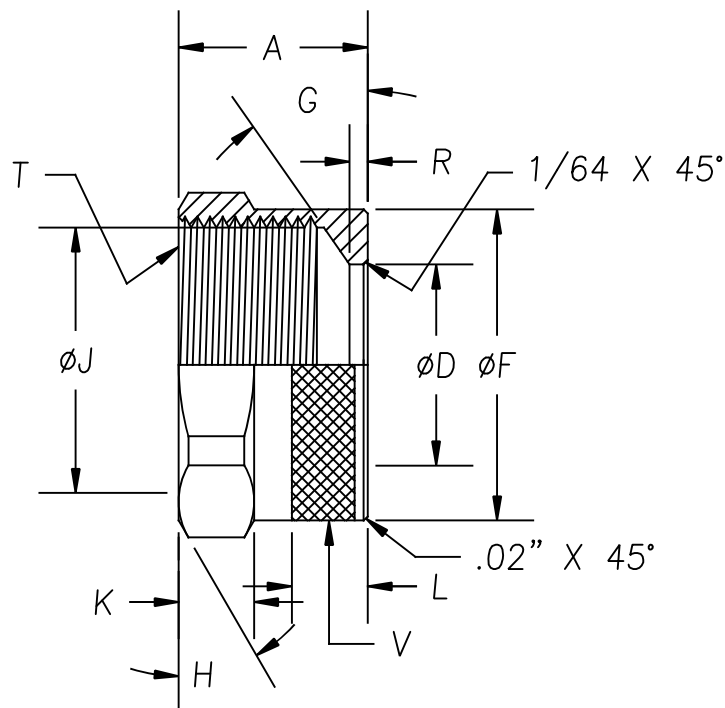

NOTE: IMPRINT REMKE AS SHOWN
CENTERED IN 3/16" SPACE ABOVE HEX
CHARACTER HEIGHT TO BE 1/8"

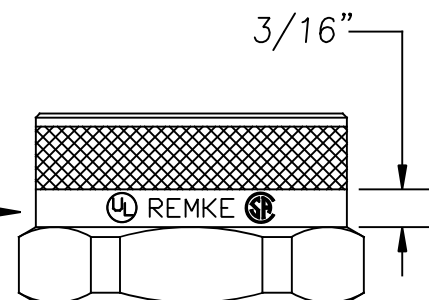

NOTES:

- PART TO BE FREE OF BURRS AND SHARP CORNERS PARTICULARLY @ BORE "D"
- * INDICATES CRITICAL INSPECTION DIMENSIONS

REV.	DATE	CHANGE	UNLESS OTHERWISE SPECIFIED 3-PLC. DIM.+/- .005 2-PLC. DIM.+/- .010 1-PLC. DIM.+/- .015 FRACTIONAL +/- 1/64 ANGULAR +/- 1°
C	2/4/93	REDRAWN USING CADD 6	
D	3/7/03	CHANGED DIM "A" TO .940, WAS .937"	
E	2/9/10	ADD UL REMKE CSA AND REDRAWN WITH NEW KNURL POSITION	

REMKE INDUSTRIES
Wheeling, Illinois 60090

SCALE: FULL
MATERIAL: 6462 T6511
FINISH: MACHINED NATURAL
PART NAME: NUT
PART NUMBER: RSR-300-N
DRAWING DATE: 2/9/10 C.V.