


**FEATURES:**

1. Material: Tin Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor only.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.


# LN Series: L20NP



|            |            |
|------------|------------|
| PROGRAM:   | SOLIDWORKS |
| UPDATED:   | 4/2022     |
| SALES REV: | A          |
| SIZE:      | B (11x17)  |

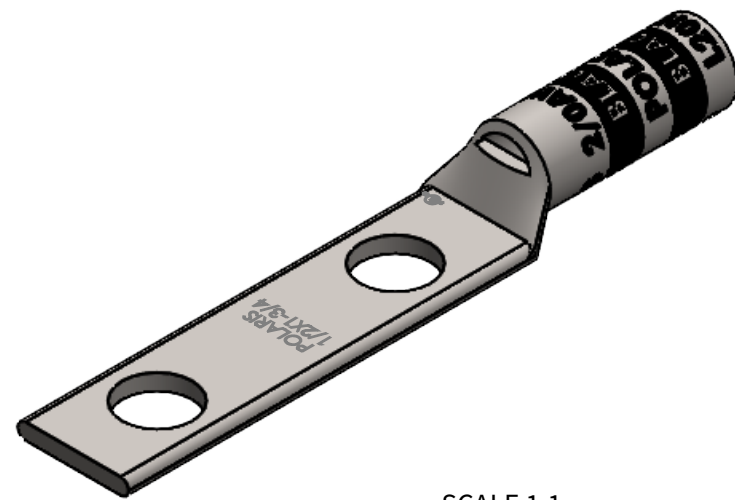

SCALE 1:1

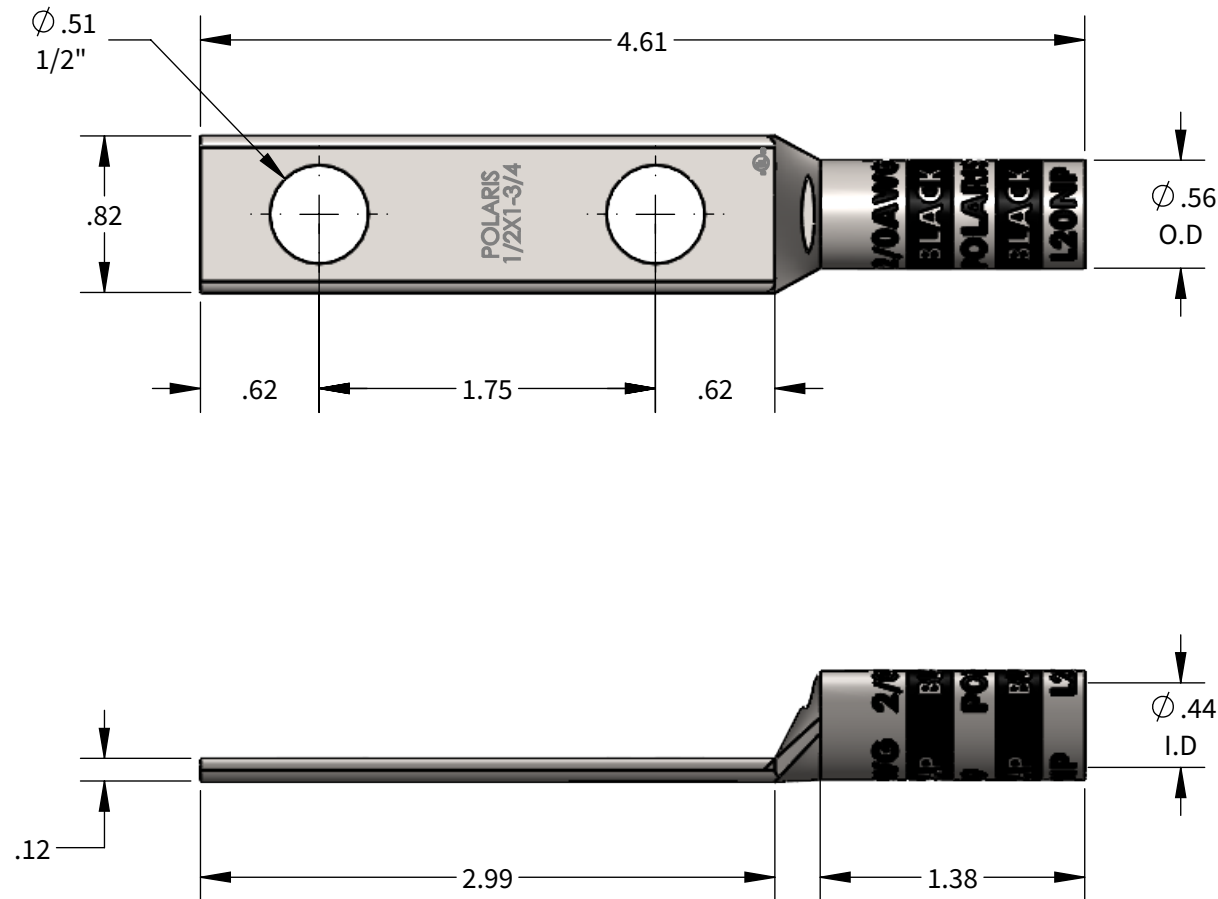

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | EXPANDED WIRE RANGE W/N12ID | NSI          |         | GREENLEE    | ILSCO                | BURNDY              | T&B             | HUSKIE    |           |            |         |
|-----------|--------------|-----------|-----------------------------|--------------|---------|-------------|----------------------|---------------------|-----------------|-----------|-----------|------------|---------|
|           |              |           |                             | N1240 SERIES | NSI-12  | 1240 SERIES | ILC-12/ILC-15 SERIES | Y-35, Y750, PAT 750 | TBM-15, TBM-14M | EP510C    |           |            |         |
| 2/0AWG    | 1-7/16"      | BLACK     | 2/0AWG-#4AWG                | KC12-2/0 (2) | CD7 (4) | HT41AZ (4)  | KC12-2/0 (2)         | ILD-6 (4)           | KC12-2/0 (2)    | U26RT (2) | 15526 (4) | HT41AZ (4) | CD7 (4) |

