



FEATURES

Construct Zoom spot fixtures are the perfect choice for specifically focused accent lighting. With a 90° vertical adjustability, 355° rotation and 15°- 50° field adjustable beam angle these fixtures are ideal for high lighting room décor.

SPECIFICATIONS


Light Source:	1 x 15 W Integrated LED
Beam Angle:	15° to 50° - Field adjustable
Kelvin:	*3000K 3500K
*For other CCT options please contact sales@eurofase.com	
Initial Lumens:	1340 Lm
Delivered Lumens:	512 Lm(15°) 815 Lm(50°)
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Vertical Rotation:	90°
Horizontal Rotation:	355°
Dimension:	2.52"DIA x 1.30"W x 6.25"H
Approval:	Indoor use

Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS


IMAGE	ITEM NUMBER	CCT	FINISH
	47133-01	3000K	Black
	47133-35-01	3500K	Black
	47133-02	3000K	White
	47133-35-02	3500K	White

DIAGRAM

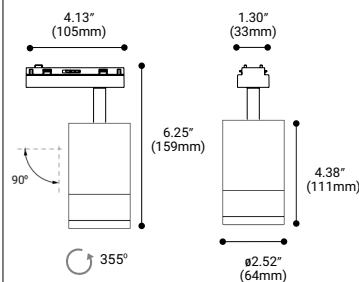

PHOTOMETRICS

H(m)	D(m)	E(lx)
15°		
1.0	0.25	3342
2.0	0.50	835
3.0	0.75	371
4.0	1.00	208
5.0	1.25	133




1m=3.28 ft
1lx=0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED

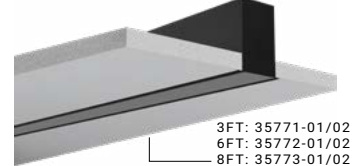

3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED

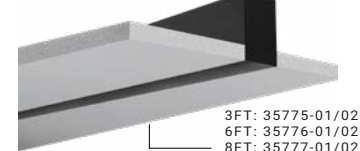

3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS




30264-014
TRIAC dimming




44912-017
0-10V dimming


PHOTOMETRICS (15°, METRIC)

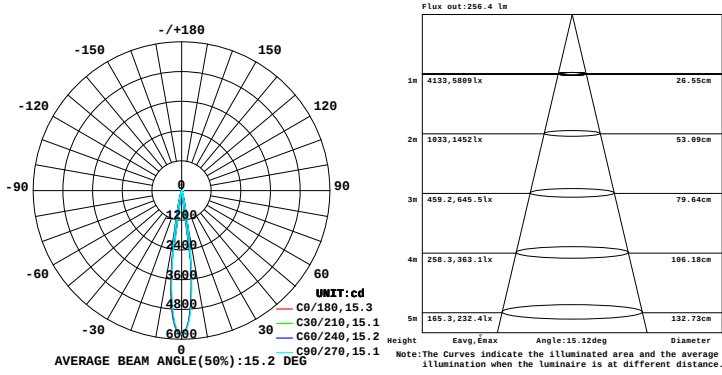

PHOTOMETRICS (50°, METRIC)

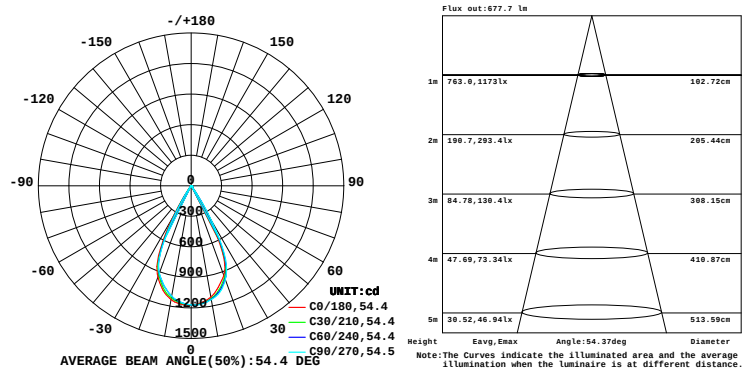

PHOTOMETRICS (15°, IMPERIAL)

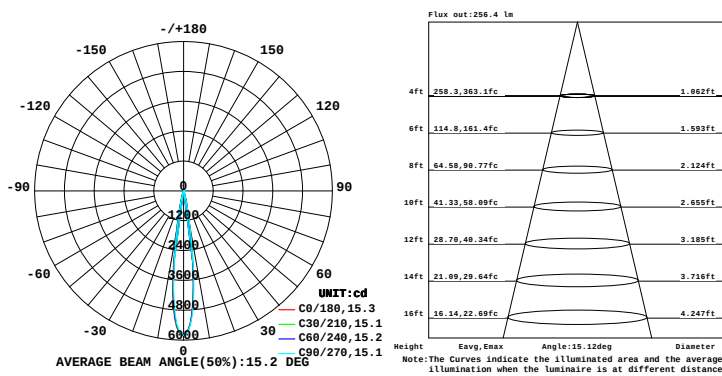

PHOTOMETRICS (50°, IMPERIAL)

