


**FEATURES:**

1. Material: Tin Plated Aluminum
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact conductor.
5. Dual rated AL9CU.
6. Expanded wire range when installed with dieless NSi compression tool (N12ID).
7. Dimensions are for reference only.



# ASC-T Series: ASC2/0T



|            |            |
|------------|------------|
| PROGRAM:   | SOLIDWORKS |
| UPDATED:   | 4/2022     |
| SALES REV: | A          |
| SIZE:      | B (11x17)  |

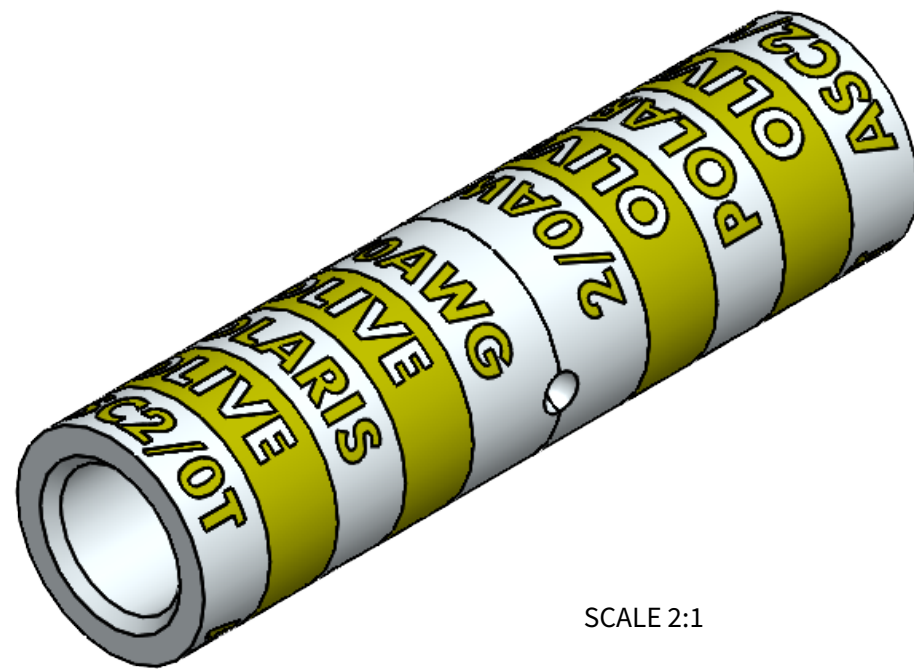

SCALE 2:1

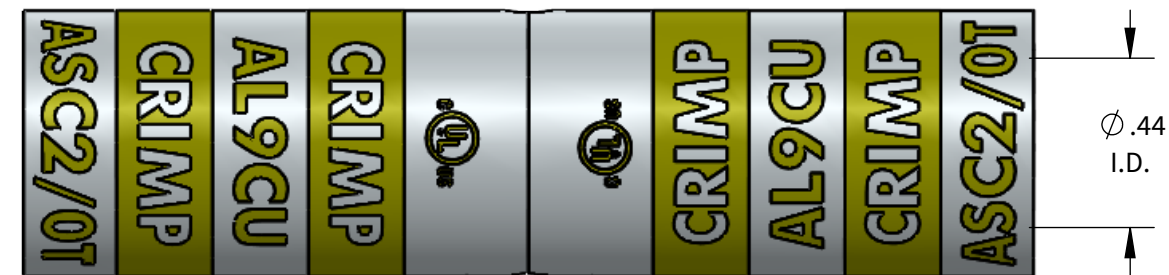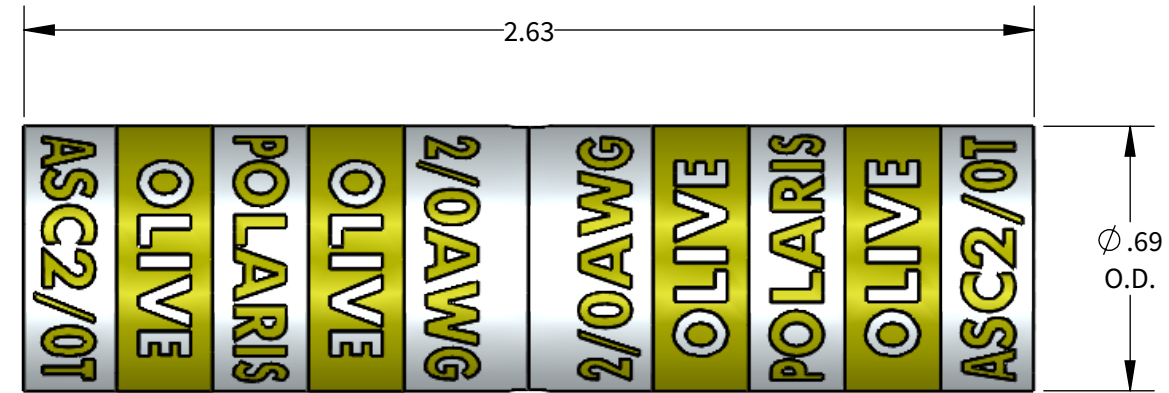

ALUMINUM COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | ALUMINUM COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE) |              |              |                     |
|-----------|--------------|-----------|--|--------------|--------------|---------------------|
|           |              |           | NSI  | GREENLEE     | BURNDY       |                     |
| 2/0AWG    | 1-3/8"       | OLIVE     | EXPANDED WIRE RANGE W/ N12ID   | N1240 SERIES | 1240 SERIES  | Y-35, Y750, PAT 750 |
|           |              |           | 2/0AWG-#4AWG   | KA12-2/0 (2) | KA12-2/0 (2) | U26ART (2)          |

