

FIGURE 1

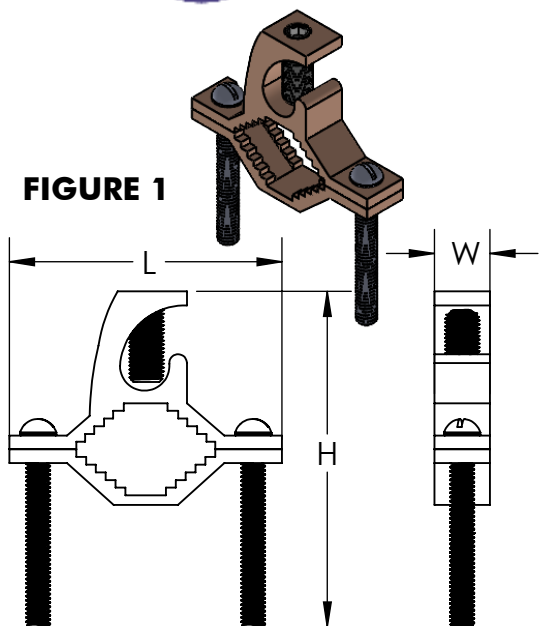


FIGURE 2

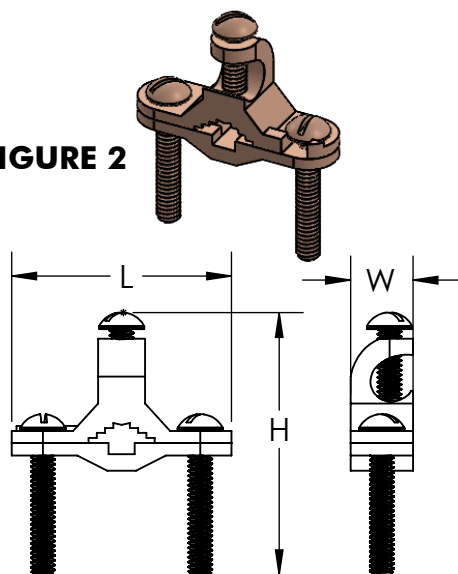


FIGURE 3


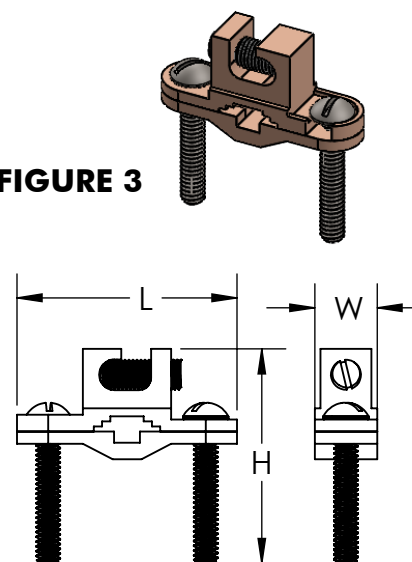


FIGURE 4

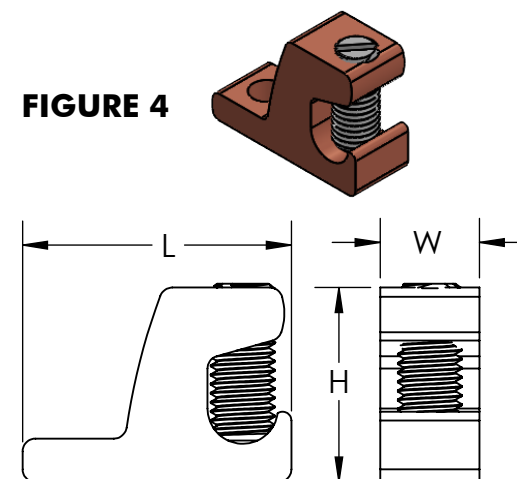

PART #	SCREW MATERIAL	FIGURE	CERTIFICATION	PIPE SIZE (IPS) (IN.)	GROUND WIRE RANGE	REBAR SIZE (IN.)	LENGTH (L) (IN)	WIDTH (W) (IN)	HEIGHT (H) (IN)
GLC-140DB	STAINLESS STEEL	1	cULus	1/2 - 1	4/0 STR - #8 STR	3/8 - 1	2.51	0.75	3.00
GLC-12DB	STAINLESS STEEL	1	cULus	1/2 - 1	#2 STR - #10 STR	3/8 - 1	2.31	0.66	2.67
GLC-12RDB	SILICON BRONZE	2	cULus	1/2 - 1	#2 STR - #10 STR	3/8 - 1	2.31	0.67	2.65
GLC-12HDB	STAINLESS STEEL	3	UL	1/2 - 1	#2 STR - #10 STR	3/8 - 1	2.18	0.65	2.22
GLC-240DB	STAINLESS STEEL	1	UL	1 1/4 - 2	4/0 STR - #8 STR	-	3.50	0.75	4.375
GLC-440DB	STAINLESS STEEL	1	UL	2 1/2 - 4	4/0 STR - #8 STR	-	5.75	0.81	6.375
GLC-4DBP*	STAINLESS STEEL	4	cULus	-	#4 STR - #14 STR	-	1.03	0.375	0.75
GLC-4DB	STAINLESS STEEL	4	cULus	-	#4 STR - #14 STR	-	1.03	0.375	0.75

FEATURES:

- For direct burial in earth and concrete
- Clamp body is made from Copper Alloy
- Class B/C and solid conductor only
- * Tin plated
- UL467 listed, Grounding and Bonding

GROUND WIRE TORQUES

WIRE RANGE	TORQUE
<= #10 AWG	35 IN*LB
#8 AWG	40 IN*LB
#6 - #4 AWG	45 IN*LB
#4 - 3/0 AWG	50 IN*LB