



FIXED MOUNT

F6080


F6080 allows you to securely mount the largest TV panels available, supporting up to 200 lbs and accommodating a generous 1100x600 VESA. With just 1.1" between the wall and the back of the TV, you can achieve a sleek, low-profile look even with the heaviest TVs. The F6080 features horizontal leveling screws for precise TV positioning and an extra-wide wall plate for optimal TV placement. Quick-release TV brackets make servicing your TV easy and convenient.

FEATURES & SPECIFICATIONS

- Fits most TVs from 55" to 120"
- Supports TVs up to 200 lb (91 kg)
- Accommodates VESA sizes from 100x100 to 1100x600
- Sits 1.1" (2.8 cm) from the wall
- Adjustable horizontal leveling
- 47.6" (121 cm) wall plate accommodates up to three 16" studs, or offsetting on 24" stud centers
- Quick release cords allow for easy removal of your TV
- Solid steel construction with durable powder coated finish
- Includes manual and all mounting hardware for wood stud and concrete installation
- Five year manufacturer's warranty
- Shipping box weight: 15.4 lb (7.0 kg)
- Shipping box dimensions: 47" x 9.6" x 3.7" (119.5 x 24.5 x 9.5 cm)
- Product weight: 13.9 lb (6.3 kg)
- UPC: 800152712345

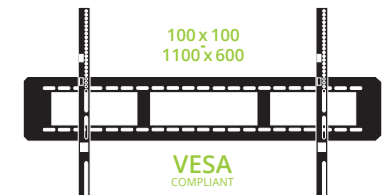


TECHNICAL ILLUSTRATIONS

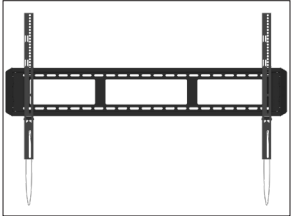


EXTRA LARGE TV SUPPORT

With a 200 lb weight capacity and support for VESA patterns up to 1100x600, the F6080 is compatible with almost all 55"-120" TVs.

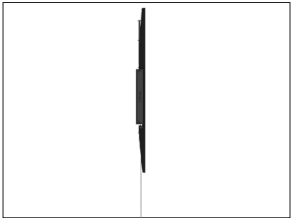


LOW PROFILE

Despite its impressive capabilities, it doesn't come at the sacrifice of bulk. F6080 features an impressive profile of 1.1" for a sleek look.

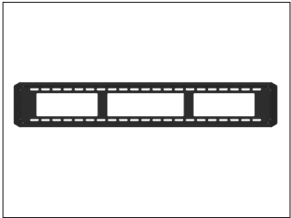


PERFECT PLACEMENT

The extra-wide wall plate spans two or three studs, allowing you to position your TV anywhere on the wall, regardless of stud spacing.

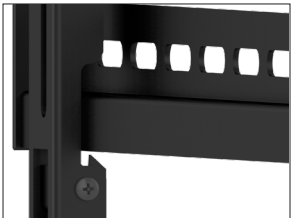

EASY SERVICING

Spring-loaded TV brackets click into place and feature quick-release cords, making it easy to detach the TV for servicing when needed.

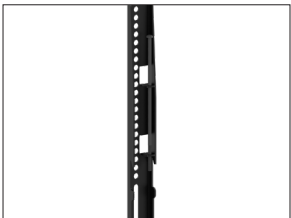

LEVELING SCREWS

Extra tall adjustment screws enable you to reach over large, installed panels and adjust horizontal leveling with a screwdriver or socket.

