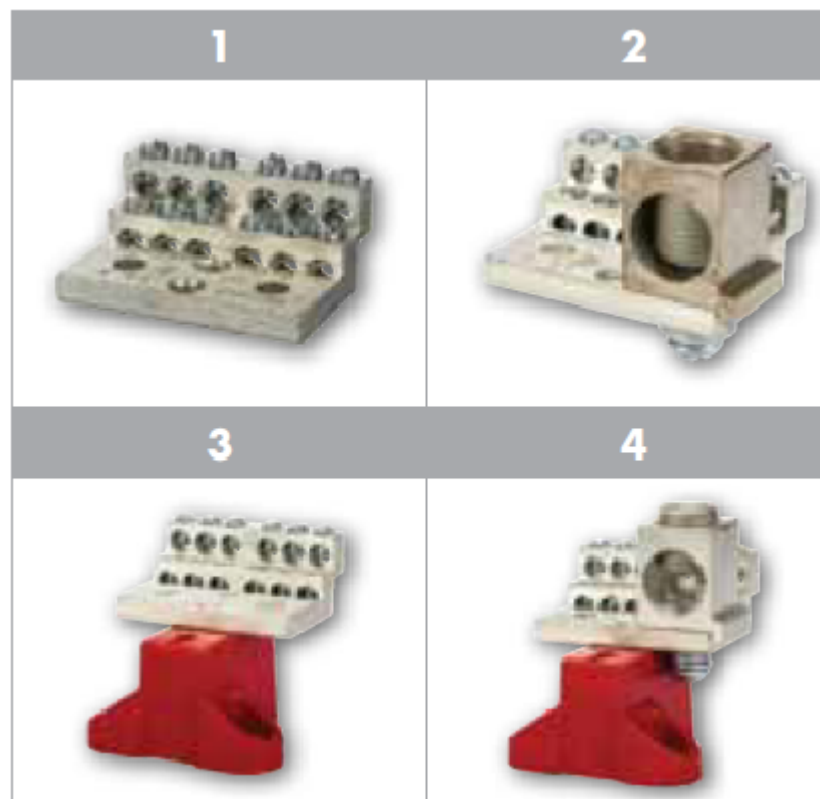


FEATURES:

1. Wire holes are stacked to minimize width. One-piece construction provides superior mechanical performance
2. Made from high strength 6061T-6 aluminum alloy
3. Options include a 350 mcm main lug and a high strength, glass-filled polyester mounting base for isolated mounting
4. Available in 12 to 42 wire holes (4-14 awg)

POLARIS®

PROGRAM:	SOLIDWORKS
UPDATED:	03/2024
SALES REV:	A
SIZE:	B (11x17)

NEUTRAL CONNECTORS: NEUTRAL 225A 600 VAC

CAT NO.	FIG NO.	NO. OF 4-14 AWG CIRCUITS	MAIN LUG SIZE	MOUNTING BASE	LENGTH	HEIGHT	WIDTH	STD. CTN. QTY.
1012	1	12	NONE	NO	2.068	0.875	1.500	1
1012M	2	12	350-6	NO	2.193	1.375	1.500	1
1012B	3	12	NONE	YES	2.068	2.250	2.250	1
1012MB	4	12	350 - 6	YES	2.193	2.750	2.250	1
1018	1	18	NONE	NO	3.132	0.875	1.500	1
1018M	2	18	350 - 6	NO	3.257	1.375	1.500	1
1018B	3	18	NONE	YES	3.132	2.250	2.250	1
1018MB	4	18	350 - 6	YES	3.257	2.750	2.250	1
1024	1	24	NONE	NO	4.196	0.875	1.500	1
1024M	2	24	350 - 6	NO	4.321	1.375	1.500	1
1024B	3	24	NONE	YES	4.196	2.250	2.250	1
1024MB	4	24	350 - 6	YES	4.321	2.750	2.250	1