


## Premium Cloth Tape

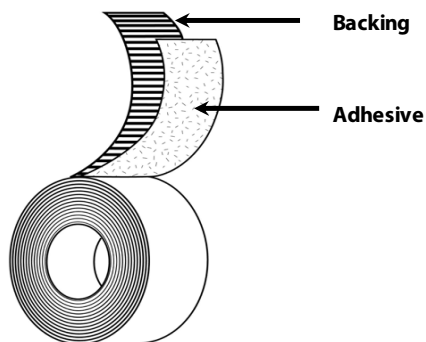

<b>Backing:</b>	Polymeric Composite
<b>Adhesive:</b>	Gray Blended Rubber
<b>Temp. Resistance:</b>	85 °C (continuous)
<b>Colors:</b>	Black
<b>Standard Sizes:</b>	1.5" x 60yd, 48mm x 55m
<b>Specifications:</b>	FMVSS-302 RoHS Compliant

### Applications

- Bundling wires and convolute splicing
- Waterproofing
- Permanent bonding and high performance applications

### Features

- PE-Coated Cloth Backing
- Natural rubber based adhesive

### Benefits

- Conforms well to irregular surfaces
- Resists twisting and curling
- High adhesion
- Moisture resistant
- Low VOC

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	10.0	mils	0.254	mm	ASTM D-1000
<b>Adhesion to Steel</b>	46	oz/in	5.03	N/cm	PSTC-1
<b>Adhesion to Backing</b>	43	oz/in	4.70	N/cm	PSTC-1
<b>Tensile Strength</b>	23	lb/in	40.25	N/cm	ASTM D-1000
<b>Elongation</b>	12%				ASTM D-1000
<b>Temperature Rating</b>	85 °C				
<b>Shelf Life at 25 °C</b>	24 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.