



# Amigo 26 W

3-LT Trim Downlight Multiple

PROJECT: \_\_\_\_\_



TYPE: \_\_\_\_\_ DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



## FEATURES

Amigo is an Architectural grade integrated LED recessed lighting collection featuring an ultra modern design and high-power light engine. There are two light aperture sizes to choose from; 2" 15w or 5" 26w making them suitable for use in ceilings ranging from 8'- 20' in height. Amigo luminaires are available in single light round or square body shapes as well as multiple head rectangular design. Simple yet popular ordering options such as trim or trim less installation, downlight or gimbal modules, 3000K or 3500K light engines make the collection easy to understand and specify. With quality internal components the Amigo collection is every bit as reliable as it is aesthetically appealing and highly functional.

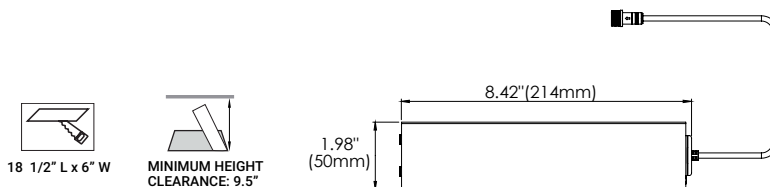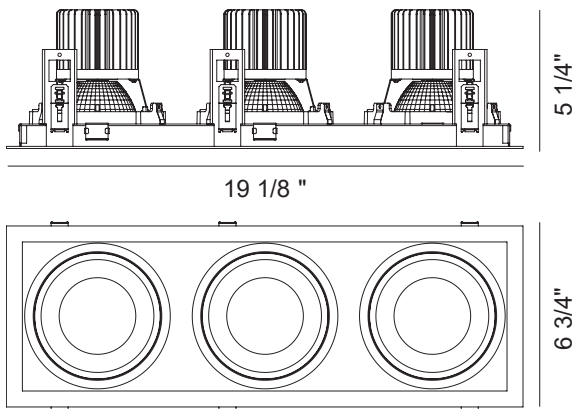

## SPECIFICATION GUIDE

| MODEL | CCT |       | FINISHES |       |
|-------|-----|-------|----------|-------|
| 35147 | 30  | 3000K | 01       | BLACK |
|       | 35  | 3500K | 02       | WHITE |

EXAMPLE: 35147-30-01

## SPECIFICATIONS

|                            |                                                                                                                                                       |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FIXTURE BODY</b>        | Extruded aluminum heat sink. Die cast aluminum, powder coated trim                                                                                    |
| <b>INSTALLATION TYPE</b>   | Remodel/existing ceiling N/C plate                                                                                                                    |
| <b>CUT HOLE</b>            | 18 1/2" x 6"                                                                                                                                          |
| <b>COLOR FINISH</b>        | Black/White/Custom                                                                                                                                    |
| <b>LIGHT MODULE</b>        | High output, high efficiency LED COB. Lumen maintenance: 70%@50,000 hrs                                                                               |
| <b>INPUT VOLTAGE</b>       | 120V-277V                                                                                                                                             |
| <b>WATTAGE</b>             | 26W Non-IC Rated                                                                                                                                      |
| <b>POWER SUPPLY</b>        | 3 x ERP 26W Constant Current 700mA Minimum operating temperature: -30° Enclosed in a junction box with 12" flexible cable to mate to module connector |
| <b>CRI</b>                 | 90+                                                                                                                                                   |
| <b>DIMMING</b>             | TRIAC/ELV/0-10V                                                                                                                                       |
| <b>DELIVERED LUMENS</b>    | 3 x 26W, 5901 Lumens                                                                                                                                  |
| <b>CCT OPTIONS</b>         | 3000K/3500K                                                                                                                                           |
| <b>BEAM ANGLE</b>          | 40°                                                                                                                                                   |
| <b>DIFFUSERS</b>           | Clear                                                                                                                                                 |
| <b>APPROVAL</b>            | Damp                                                                                                                                                  |
| <b>ELECTRICAL APPROVAL</b> |  compliant                                                       |
| <b>WARRANTY</b>            |                                                                  |

## HOUSING OPTIONS (SOLD SEPARATELY)

### 36211-012 NEW CONSTRUCTION PLATE



**Dimension** 20"L x 12"W x 1 1/2"H  
**Opening** 18 1/2"L x 6"W

### 36212-019 AIRTIGHT IC BOX



**Dimension** 26"L x 12"W x 11 1/4"H  
**Opening** 18 1/2"L x 6"W