
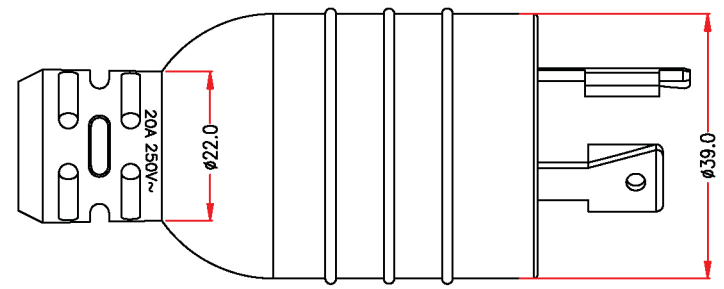
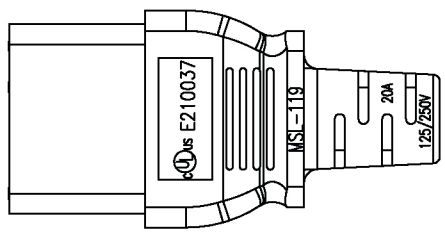
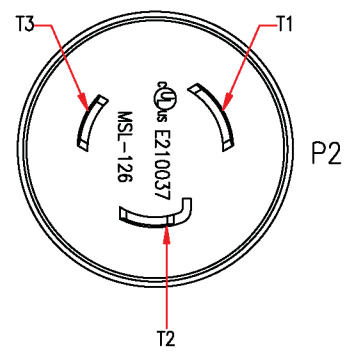
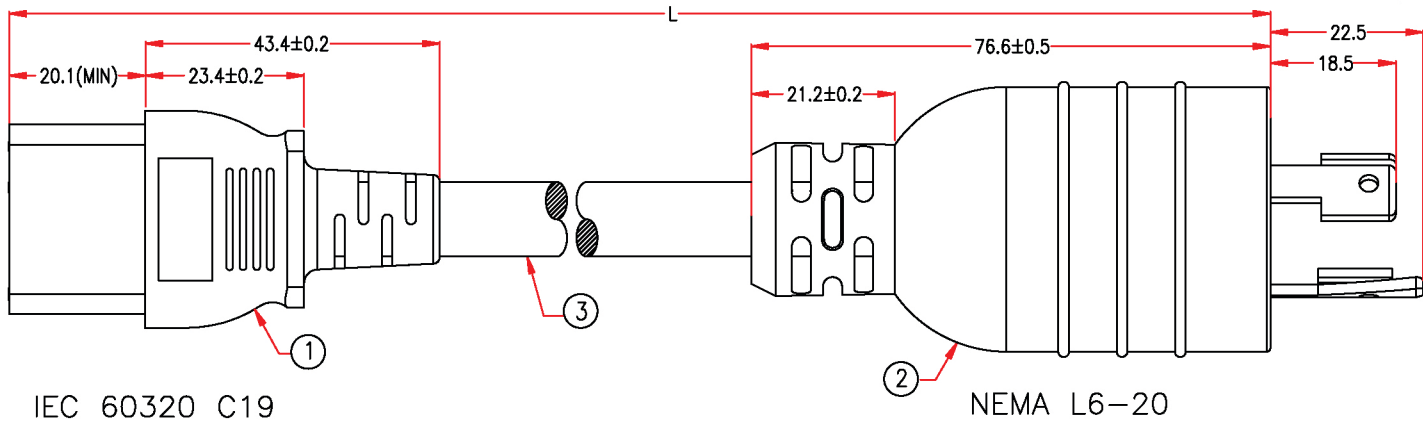


P1: M-042

P2: M-048A



Customer No.: No.:1



PACKING A: ≥1FT

PACKING B: ≥2FT

PACKING C: <2FT



MARKING: (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 3.31MM²(12AWG) FT2 105°C 300V 204790 MSL

	P1	P2
BLACK	L	T1
WHITE	N	T3
GREEN	E	T2

P1, P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No. EPSVT011203C-123	H5TC16-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304		M304
	BRACKET: XXXX		1Set	M767
	TERMINAL: 97656BL-0 (T3)		1	M257
	TERMINAL: 97655BL-0 (T2)		1	M257
1	TERMINAL: 97654BL-0 (T1)		1	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304	1	M304
	BRACKET: YST-037	A1QC36-0767	1Set	M767
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257
No.	DESCRIPTION			Q'TY
				Supplier

APPROVED	HOSKINS				Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED		12/OCT/15	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	HOSKINS	12/OCT/15	PRODUCT NO.	PWR-9QJL-02xx-xxxx	
					UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm