


Medium-Grade TPP Strapping Tape

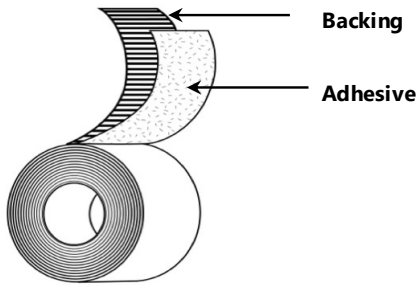

- Backing:** #85 MOPP Film
- Adhesive:** Synthetic Rubber
- Colors:** White
- Standard Sizes:** 12mm X 16452M, 9mm X 16452M on 6" ID core

Applications

- Palletizing, ensures stability during transport
- Appliance part securement
- Envelope and packaging tear strip
- Furniture assembly and transport
- L-clipping in furniture and wood manufacturing
- General bundling and securement

Features

- Monoaxially-Oriented Polypropylene
- Rubber Adhesive

Benefits

- Maintains hold under stress and movement
- Maintains its shape and strength under tension
- Thin for low-profile splices
- For use in environments with exposure to chemicals
- Provides strong initial tack
- Adheres to many surfaces

Typical Test Values

	Standard UOM	Metric UOM
Total Thickness	2.8 mils	0.071 mm
Adhesion to Steel	54 oz/in	5.9 N/cm
Tensile Strength	85 lb/in	149 N/cm
Elongation	55%	
Operating Temperature	0 to 140°F	-18 to 60°C

Recommended Storage Conditions: 60-80 °F/16-27 °C at 40-60% RH

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.