


Flame Retardant Wire Harness Tape

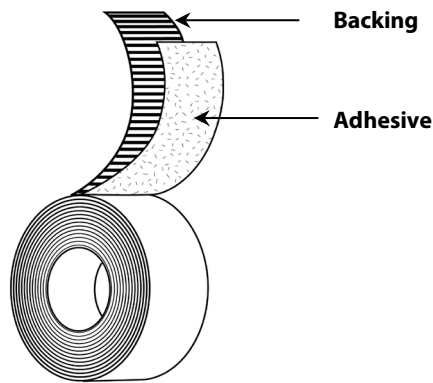

Backing:	Polymeric Composite
Adhesive:	Black Blended Rubber
Temp. Resistance:	105 °C (continuous)
Colors:	Black
Standard Sizes:	3/4" x 100ft, 1" x 100ft
Specifications:	Ford Perf. ES-AC3T-1A303-AA(B10-10) DaimlerChrysler MS-CH71 Type A (107 °C) FMVSS-302 RoHS Compliant

Applications

- Automotive engine compartment and interior electrical wire harness applications
- Spot taping, clip retention or continuous wrap

Features

Benefits

• Composite Backing	• Easy tear and application
• Rubber adhesive	• Flexible even at cold temperatures
	• Consistent unwind
	• Low noise, low fogging
	• Non-corrosive to copper wire
	• Low VOC
• Flame retardant	• Meets FMVSS-302 requirements

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	6.5 mils	0.165 mm	ASTM D-1000
Adhesion to Steel	40 oz/in	4.38 N/cm	PSTC-1
Adhesion to Backing	24 oz/in	2.63 N/cm	PSTC-1
Tensile Strength	27 lb/in	47.25 N/cm	ASTM D-1000
Unwind Force	36 oz/in	3.94 N/cm	PSTC-8
Elongation	19%		ASTM D-1000
Resistance to Typical Auto Fluids			
Room Temperature	Pass		
Elevated Temperatures	Pass		
Flame Resistance	Self-Extinguishing		ISO-3795
Dielectric Strength	2.7 kV		SAE J1756
Temperature Rating	105 °C		
Shelf Life at 25 °C	24 Months		

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.