

REV.	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVED/DATE
A	NEW RELEASE PER TJEECR-15004	LJING 12/12/13'	WUJUN	TJL
B	NEW RELEASE PER TJEECR-160*	YM.CHANG 05/07/16'	WUJUN	WUJUN

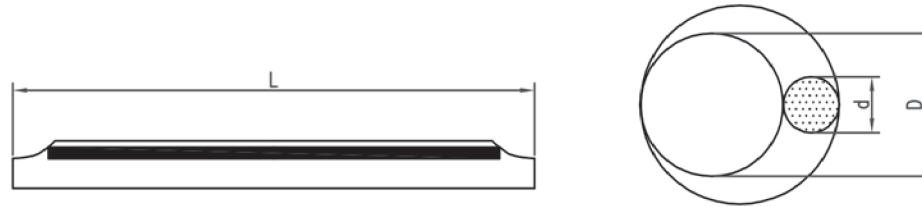


TABLE A

ST-FPS-40	2.6	61	1.4	61	1.2	55
ST-FPS-60	2.6	40	1.4	40	1.2	36
TCS PN	Dia. (After heat shrinked)	Length	Inner Dia.	Length	Dia.	Length
	L(mm) Heat shrinkable tube		D(mm) Hot melt adhesive tube		d(mm) Stainless steel rod	

Note:

1.0. OPERATION TEMPRETURE: -55°C~100°C



2.0. HEAT SHRINK TEMPRETURE RANGE: 90°C~110°C

3.0. MATERIAL:

3.1. Heat shrinkable tube: LDPE

Hot melt adhesive tube: EVA

Stainless steel rod: SUS304

		DRAWN	DATE	
		LJING	12/12/13'	
DESIGN	DATE	TITLE HEAT SHRINKABLE PROTECTION TUBE (Customer Drawing)		
LJING	12/12/13'			
MATL	NOTE	CHECKED	DATE	SERIES OM DRAWING NO. C-OMPO3-00-00 SIZE A3 REV. B
FINISH	NONE	WUJUN		
SCALE	~	UNIT	mm	
SHEET 1	of 1			
		APPROVED	DATE	
		TJL		