
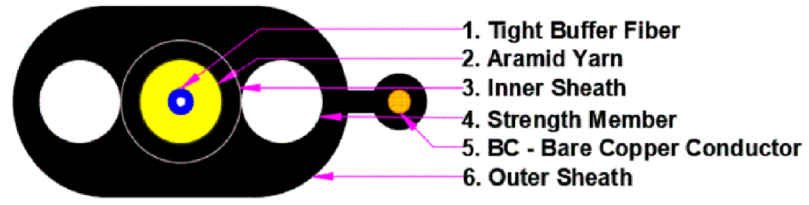
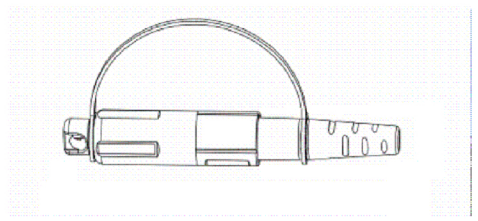


REV	MODIFICATION	UPDATE DATE	SIGNATURE

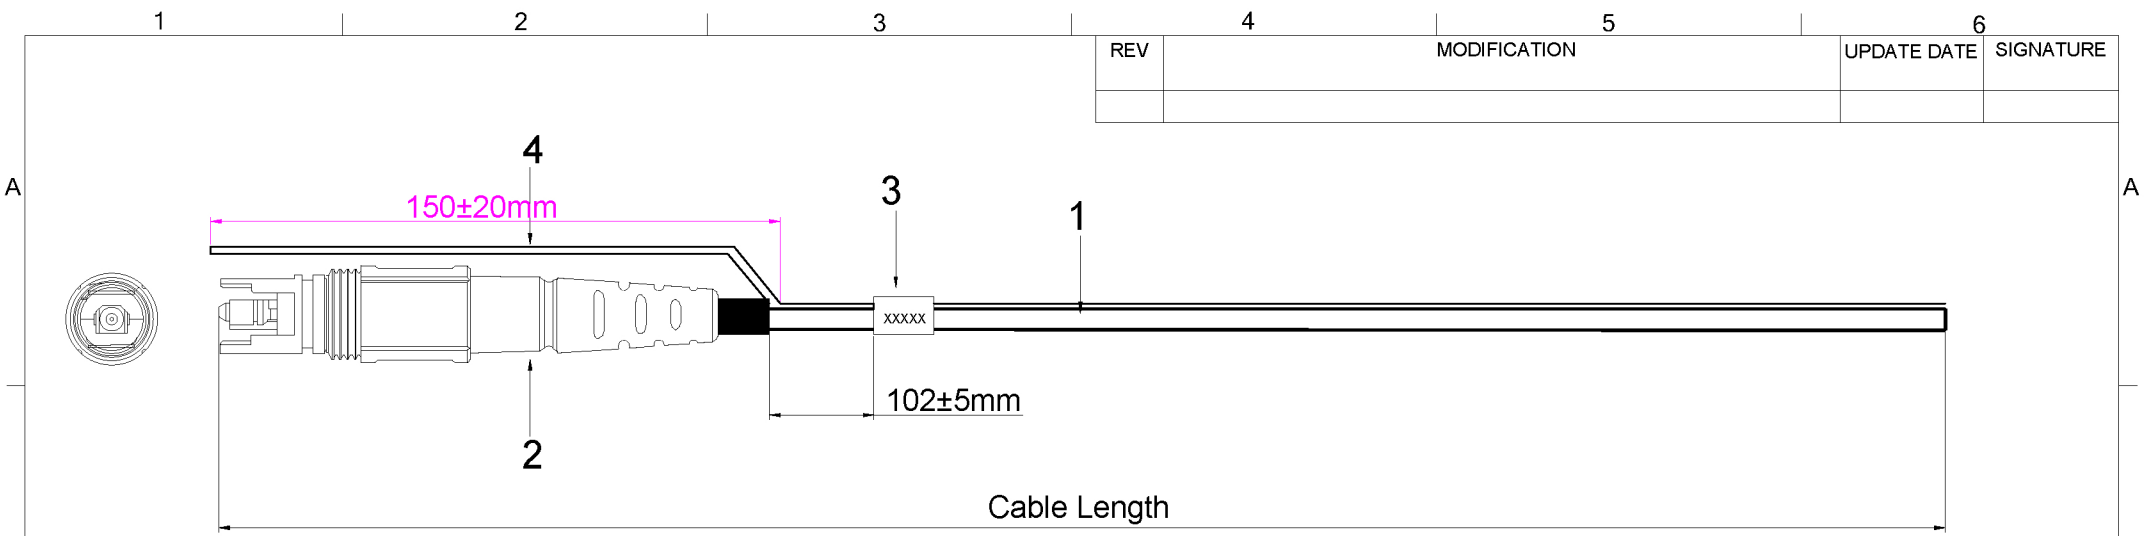

Cable Length	Tolerance
Cable Length < 1M	5cm
1M ≤ Cable Length < 10M	15cm
10M ≤ Cable Length < 50M	30cm
Cable Length ≥ 50M	Cable Length * 1%

Notes:  
 Insertion Loss ≤ 0.30dB  
 Return Loss ≥ 60dB

4	A/R		Bare copper Conductor
3	1		Cable label
2	1		Optitap compatible-SC/APC SM Simplex Connector (Black Housing Black Boot) Compatible with Corning, Optitap connector
1	A/R		Ø9.8*8.0*4.5mm, Singlemode 9/125 G657A1, Drop Cable, PE, Color: Black

ITEM	QTY	P/N	SPECIFICATIONS								
			DRAW	Wenhui Chen	DATE	11-01-2021	TITLE: Pigtail Optitap Compatible-SC/APC Singlemode				
			CHECK	WEN ZHU LIAO	APPROVED		CUSTOMER NO	DWG NO	0171-069	REV	A