


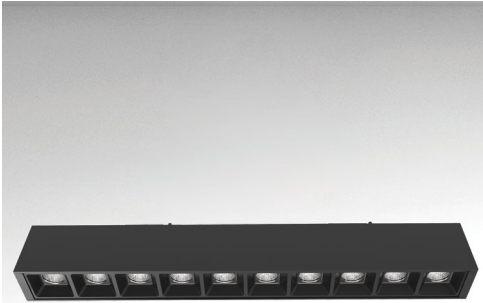

FEATURES

Linear module cluster fixtures offer uniform light distribution, high output performance and stylish design. This fixture family is available in 3 sizes and sits flush to the channel lip and ceiling line.

SPECIFICATIONS

Light Source:	1 x 22 W Integrated LED
Beam Angle:	25°
Kelvin:	*3000K
*For 2700K, 3500K, 4000K please contact sales@eurofase.com	
Initial Lumens:	1925 Lm
Delivered Lumens:	1378 Lm
CRI:	90+
Dimming:	TRIAC/0-10V
Color:	Black/White
Input:	24V DC (Remote Driver required)
Dimension:	10.87"L x 1.30"W x 2.16"H
Approval:	Indoor use
Electrical Approval:	   COMPLIANT
Warranty:	

ORDERING OPTIONS




Black
35758-01




White
35758-02

DIAGRAM



PHOTOMETRICS

H(m)	D(m)	E(lx)
25°		
1.0	0.61	5243
2.0	1.23	1311
3.0	1.84	582
4.0	2.46	327
5.0	3.08	209



1 m = 3.28 ft
1 lx = 0.09 fc

COMPATIBLE CHANNELS


SURFACE MOUNT



PENDANT




TRIM RECESSED



3FT: 35771-01/02
6FT: 35772-01/02
8FT: 35773-01/02

TRIMLESS RECESSED



3FT: 35775-01/02
6FT: 35776-01/02
8FT: 35777-01/02

COMPATIBLE DRIVERS



30264-014
TRIAC dimming



44912-017
0-10V dimming