


P1: M-060A

P2: M-059A


Customer No.: NO.1

P1

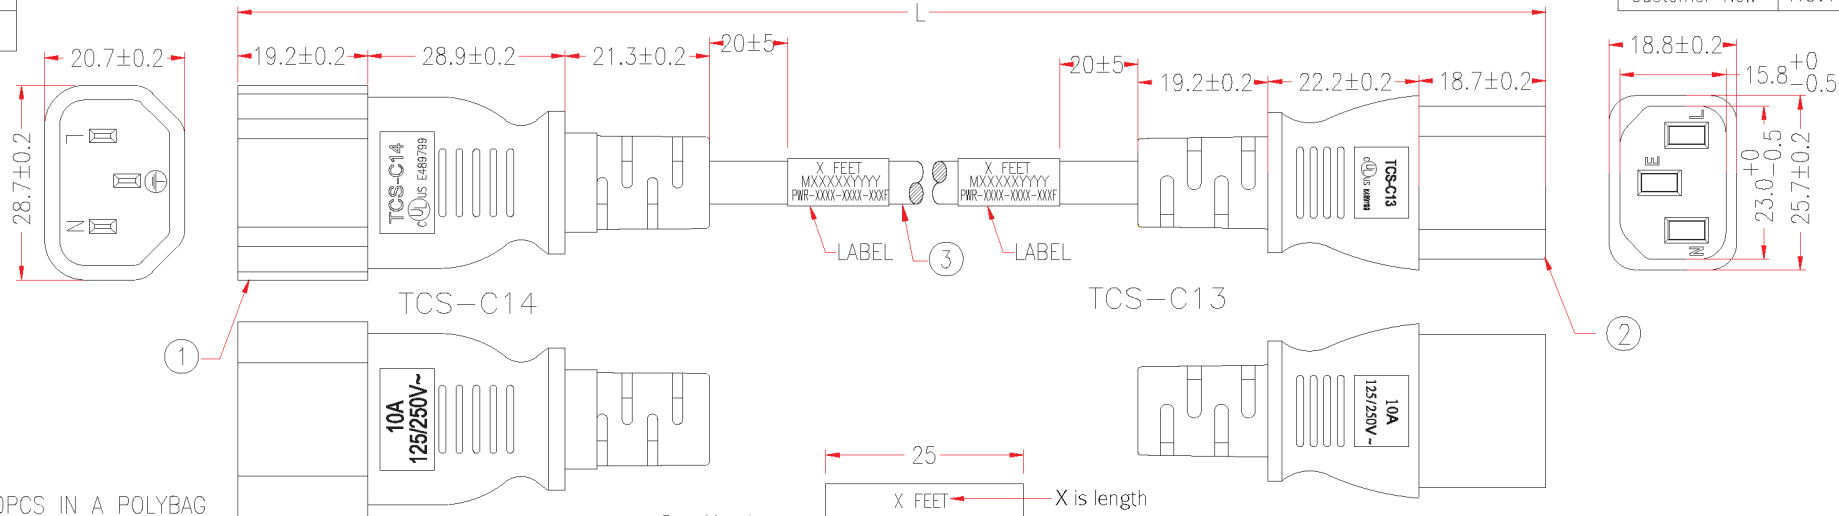

PACKING: 10PCS IN A POLYBAG

PACKING A: <3FT PACKING B: >=3FT

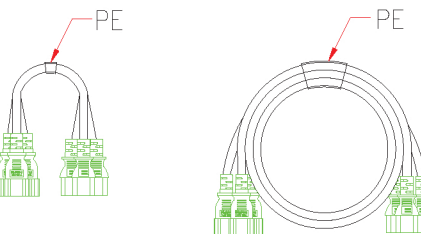


CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E495164

C (UL) SVT 3/C 0.824MM²(18AWG) FT2 105°C 300V E495164 TCS

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-34VL-12BK	BLACK
PWR-34VL-12BL	BLUE(PT286C)
PWR-34VL-12RD	RED(PT201C)
PWR-34VL-12GN	GREEN(PT376C)
PWR-34VL-12GR	GRAY(PANTONE421C)
PWR-34VL-12OR	ORANGE(PANTONE1565C)
PWR-34VL-12YE	YELLOW(PANTONE123C)

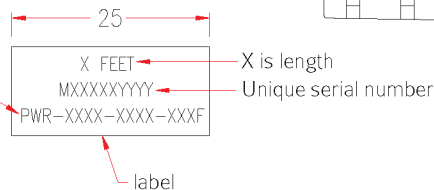

P1: TCS-C14 cULus E489799

P2: TCS-C13 cULus 2000

*NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD
The label is waterproof

No.	DESCRIPTION		Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, SVT Jacket	H5TB20-0304	L-40mm	M304
2	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304		M304
	BRACKET: CP-R445A-BS	A1QC61-0767	1	M767
	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	3	M257
1	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304		M304
	BRACKET: YS-014, COLOR SEE LIST	A1QC10-0767	1	M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257

APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	25/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	25/SEP/17	PRODUCT NO.	PWR-34VL-12xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

