



Toll Free: 87 PERMATEX  
(877-376-2839)

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

# Permatex® Rust Treatment

AAM Revised 04/26

### PRODUCT DESCRIPTION

Permatex® Rust Treatment is a professional-strength, all-purpose automotive coating designed to provide maximum protection, coverage, and durability against corrosion. This fast-drying, vinyl-based formula sprays on clear and converts rust into a black, metal-protective surface that prevents continued corrosion. It combines the flexibility and sealing properties of rubber with superior coating thickness, drying to a firm, flexible, tack-free film with excellent abrasion resistance. Ideal for automotive frames, rocker panels, and wheel wells, it also provides insulation for road and chassis noise.

### PRODUCT BENEFITS

- Encapsulates rust on automotive applications
- Neutralizes rust and prevents additional rust
- Works on damp, rusty metal


### TYPICAL APPLICATIONS

- Automotive frames and structural components
- Body panels and seams
- Rusted automotive metal surfaces

### DIRECTIONS FOR USE

**NOTE: This product is not recommended for use under exterior automotive sheet metal finishes. May cause blistering or peeling.**

1. Use gloves to prevent staining of hands.
2. Scrape or wipe off dirt & oil. Sand with coarse sandpaper or wire brush.
3. Should be used when temperature is between 50° and 90°F (10° and 32°C). Can be applied to surfaces which do not exceed 200°F (93°C).
4. Shake well before using. Spray a thin coat onto rusted surface 8 -10 inches away until surface is evenly coated.
5. Apply 2-3 thin coats, allowing no more than two minutes drying time between coats. Final application should dry to a black finish. Allow 24 hours drying time prior to topcoat.

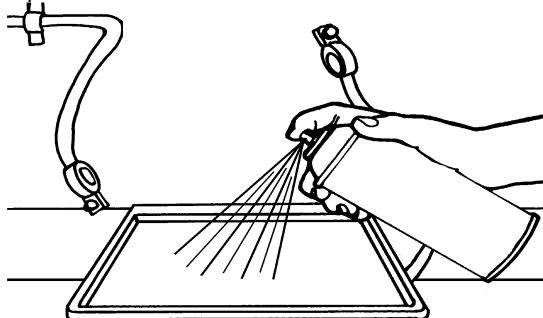

6. For a smooth finish, sand with 320 grit sandpaper before top coating
7. Clean up with alcohol.

### Note:

Aerosol product (3 coats will cover 10 to 12 square feet at 2 mil DFT).

Acrylic latex finish paint require a solvent based primer/sealer before painting. Lacquer/enamel base paints may be used without a primer.

### PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Vinyl butyral
Appearance	Clear liquid
Odor	Pungent
Flash Point	Aerosol, contents under pressure, consult MSDS
NFPA 704 Flammability Rating	3 (Flammable)

### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

### ORDERING INFORMATION

Part Number	Container Size
81849 (79DA)	16 oz. aerosol can

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **ITW Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE - (1-87)PERMATEX)