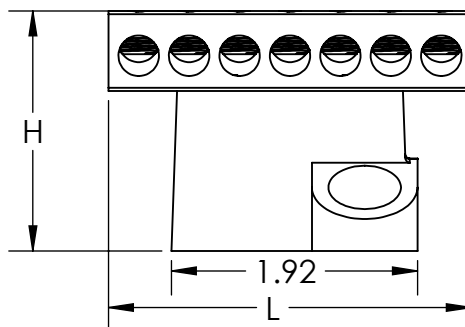
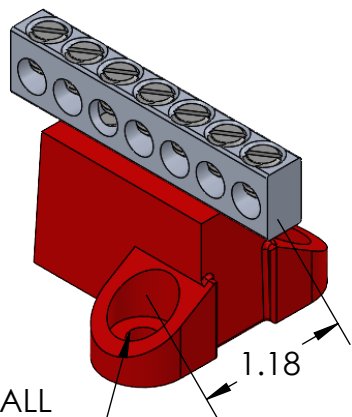


2X ϕ .28 THRU ALL
 $\square$ ϕ .57 ∇ .50

PART #	CONDUCTOR MATERIAL	SCREW TYPE	WIRE RANGE	# OF CIRCUITS	LENGTH (L) (IN)	Height (H) (IN)
GBA2-7	ALUMINUM	FLAT HEAD	#2-#14 AWG	7	2.86	1.91
GBC2-7	COPPER	FLAT HEAD	#2-#14 AWG	7	2.86	1.91
GBA2-10	ALUMINUM	FLAT HEAD	#2-#14 AWG	10	4.02	1.91
GBC2-10	COPPER	FLAT HEAD	#2-#14 AWG	10	4.02	1.91
GBA2-14	ALUMINUM	FLAT HEAD	#2-#14 AWG	14	5.58	1.91
GBC2-14	COPPER	FLAT HEAD	#2-#14 AWG	14	5.58	1.91
GBA2-20	ALUMINUM	FLAT HEAD	#2-#14 AWG	20	8.05	1.91
GBC2-20	COPPER	FLAT HEAD	#2-#14 AWG	20	8.05	1.91
GBA20-7	ALUMINUM	3/16 HEX	2/0-#14 AWG	7	4.36	2.02
GBA20-10	ALUMINUM	3/16 HEX	2/0-#14 AWG	10	6.26	2.02
GBA20-14	ALUMINUM	3/16 HEX	2/0-#14 AWG	14	8.75	2.02

FEATURES:

- Made with either 6061-T6 Aluminum Alloy or high conductivity Copper
- Aluminum connectors are Tin plated
- Base made with high-strength glass-filled polyester
- Pre-assembled with tin plated screws
- GBA is Dual rated for Aluminum or Copper
- GBC is for Copper conductor only

GROUND WIRE TORQUES

WIRE RANGE	TORQUE
<= #10 AWG	35 IN*LB
#8 AWG	40 IN*LB
#6 - #4 AWG	45 IN*LB
#4 - 3/0 AWG	50 IN*LB