


Flame Retardant Wire Harness Tape

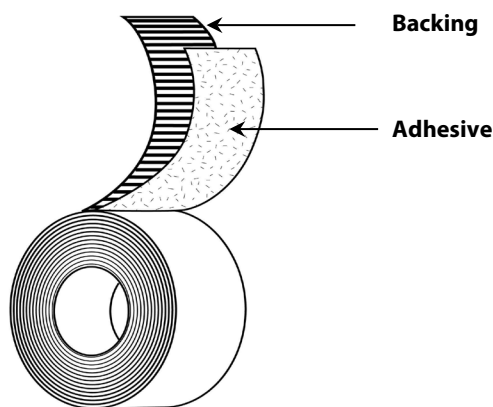

Backing:	Polymeric Composite
Adhesive:	Black Blended Rubber
Temp. Resistance:	105 °C (continuous)
Colors:	Black
Standard Sizes:	1/2in x 100ft, 1/2in x 50ft, 3/4in x 100ft 3/4in x 50ft, 1in x 100ft
Specifications:	Ford Perf. ES-AC3T-1A303-AA(B10-00) Ford Mat. ESBM3G177A DaimlerChrysler MS-CH71 Type A Delphi-Packard (GM) M2399 VMSG-4456 FMVSS-302 RoHS Compliant

Applications

- Automotive engine compartment and interior electrical wire harness wrap
- Spot taping, clip retention or continuous wrap

Features

- Composite Backing
- Rubber adhesive
- Flame retardant

Benefits

- Easy tear and application
- Excellent conformability for wrapping
- Consistent, smooth unwind
- Non-corrosive to copper wire
- Resistant to typical automotive fluids
- Low VOC
- Meets FMVSS-302 requirements

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness	8.5	mils	0.216	mm	ASTM D-1000
Adhesion to Steel	42	oz/in	4.59	N/cm	PSTC-1
Adhesion to Backing	30	oz/in	3.28	N/cm	PSTC-1
Tensile Strength	27	lb/in	47.25	N/cm	ASTM D-1000
Unwind Force	29	oz/in	3.17	N/cm	PSTC-8
Elongation	8%				ASTM D-1000
Resistance to Typical Auto Fluids					
Room Temperature	Pass				
Elevated Temperatures	Pass				
Flame Resistance	Self Extinguishing				ISO-3795
Dielectric Strength	1000v for 60 sec				ASTM D-1000
Temperature Rating	105 °C				
Shelf Life at 25 °C	24 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.