4

FUSE TABLE					
Overcurrent Protection, Fuse Required Class	Maximum Amp Rating				
Class J	110A				
Class T	110A				
Class RK1	60A				
Class RK5	30A				
Class G	60A				
Class CC	30A				

FEATURES:

D

С

В

Α

- 1. AVAILABLE IN FINGER SAFE STYLE MODEL ONLY THAT INCLUDE END PLATES AND HINGED COVER
- 2. FINGER SAFE TO IP20. PER. IEC60529
- 3. cULus LISTED TO UL 1953 AND 1059
- AL9CU RATED FOR USE T=WITH COPPER OR ALUMINUM CONDUCTOR CLASS B & C, AND OPERTAING TEMP OF 90C
- 5. VOLTAGE RATING 600 V
- 6. DEFAULT SCCR (SHORT CIRCUIT CURRENT RATING) WITH CORRECT FUSING = 100kA
- 7. QUICK RELEASE LOCKING MECHANISM TO DISCONNECT FROM STD.35MM DIN RAIL
- 8. OVAL ALIGN MOUNTING HOLE AT BASE ON EITHER WIRE ENTRY END
- 9. MATERIAL: COVER AND END PLATES = LEXAN 500R POLYCARBONATE
- 10. MATERIAL: BASE AND SIDE PANELS = VAALOX NYLON 6/6 GF30%
- 11. MATERIAL: CONNECTOR BLOCK 6061T6 ALUMINUM TIN PLATED
- 12. MATERIAL: WIRE PORT SCREWS, STEEL TIN PLATED
- 13. MATERIAL: CONNECTOR TO BLOCK SECURITY SCREW, STEEL TIN PLATED
- 14. MULTI-PORT GANGING OF SAME SIZE BLOCK (SML, MED, LRG)
- 15. MAXIMUM AMPACITY PER POLE = 760A
- 16. PRIMARY (LINE, RUN, MAIN) SIDE = 500 MCM
- 17. PRIMARY MAXIMUM TORQUE VALUE = 442 IN.LBF
- 18. PRIMARY STRIP LENGTH = 1.00"
- 19. MAXIMUM AMPACITY PER POLE = 760A
- 20. SECONDARY (LINE, RUN, MAIN) SIDE = 4/0 AWG
- 21. SECONDARY MAXIMUM TORQUE VALUE = 224 IN.LBF
- 22. SECONDARY STRIP LENGTH = 1.00"

NOTES:

1. DIMENSIONS IN BRACKETS [] ARE IN MM ROUNDED OFF TO THE NEAREST MM, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY 2. MATERIALS: BASE, POLE SEPERATING SIDE AND LOCK - NYLON 66 GF30% BLOCK AND RETENTION SCREWS - TIN PLATED ALUMINUM FINGER SAFE COVERS -POLYCARBONATE BLOCK MOUNTING HARDWARE - STAINLESS STEEL

3

3

3. MAY BE USED IN ANY NUMBER OF POLES REQUIRED.


r<u>____</u>


<u>RUN SIDE</u>

2: TORQUE VALUES

WIRE RANGE	CONNECTOR SIZE										
(MCM/AWG)	750	600	500	350 250 3/0			2/0	1/0	#2	#4	
750 - 600	550	550									
500	550	450	450								
400	550	450	450								
350	550	400	400	400							
250	550	360	360	360	360						
4/0 - 3/0	550	250	250	250	250	250					
2/0	550	180	180	180	180	180	120				
1/0	550	180	180	180	180	180	80	80			
#1		150	150	150	150	150	65	65			
#2 - #3		150	150	150	150	150	65	65	65		
#4-#6		150	110	110	110	110	55	55	35	35	
#8				75			45	45	25	25	
#10 - #14				35			25	25	15	15	

2			1			
	REV	DATE	REVISED	BY	ECN	C'K'D
	Α		RELEASED			
	В	8/31/23	UPDATED ITEM SPECIFCATION	DC	23-00015	SSM

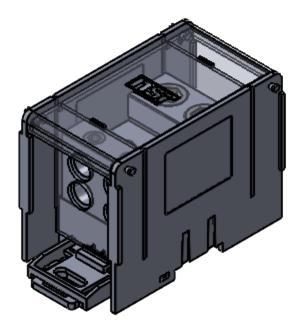

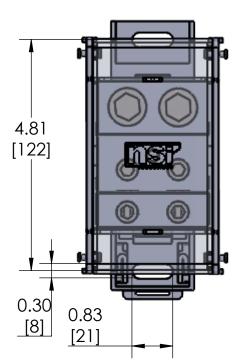


D

С


В

Α



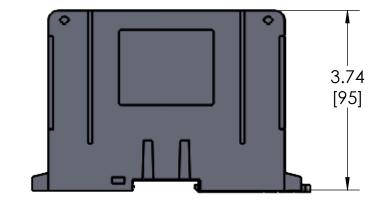

DIN RAIL STYLE

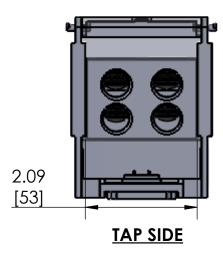

NPDB -	24 -	500 -	1
NSI PRODUCT GROUP POWER DISTRIBUTION B;OCKS	1ST DIGIT = # OF PRIMARY COND. 2ND DIGIT = #OF SECONDARY COND.	MAXIMUM WIRE SIZE	NUMBER OF POLES

PROPRIETARY AND CONFIDENTIAL		NAME	DATE				\wedge			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NSI Industries. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF	DRAWN	DC	8/31/23			Ĩ				
	CHECKED	SSM	8/31/23	INSI						
NSi Indsutries IS PROHIBITED.	ENG APPR.									
DIM. UNLESS OTHERWISE NOTED, ARE IN INCHES.	MFG APPR.			TITLE:						
DECIMAL XX ± .015 DECIMAL .XXX ± .005 FRACTION ± 1/64 ANGLES ± 1°	Q.A.				POW	ER DIS	TRUBUTIO	N BLOO	CKS	
DO NOT SCALE DRAWINGS	CO	MMENTS:								
MATERIAL TO ORDER NSI PRODUCTS CALL UNITED STATES		CALL	SIZE	DWG.	NO.	MODEL. I	NO.	REV		
FINISH SEE NOTES		(704) 439-2420 FOR PRODUCT INFO:		C			NPDB-24-	500-1	В	
DIMENSIONS ARE IN INCHES		ı	SCALE:1:2 SOLIDWORKS 2022				SHEET	1 OF 1		

2