

3.5"

45371 SQUARE FIXED DOWNLIGHT



ADJUSTABLE
CCT

2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase or 0-10V dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location.

DIMENSIONS

- Cut hole: Ø3 3/4".
- Fixture: Ø4 1/2" x 2 13/16"H.

ELECTRICAL

- 1120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC/ELV or 0-10V dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 810 lm | 866 lm | 947 lm | 982 lm | 950 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH	DIMMING
45371-028	Black	Triac/ELV
45371-011	White	Triac/ELV
45371-011-0	White	0-10V

ACCESSORIES



45372-018
NEW CONSTRUCTION PLATE
Mounting kit includes bars
14" x 7 3/4"
Ø3 3/4"



45517-013
NEW CONSTRUCTION
SMASH PLATE
13 1/4" x 6 1/2"
Ø3 3/4"




47205-017
15W REMOTE
EMERGENCY
BACKUP BATTERY




NO IC BOX
REQUIRED

PHOTOMETRICS

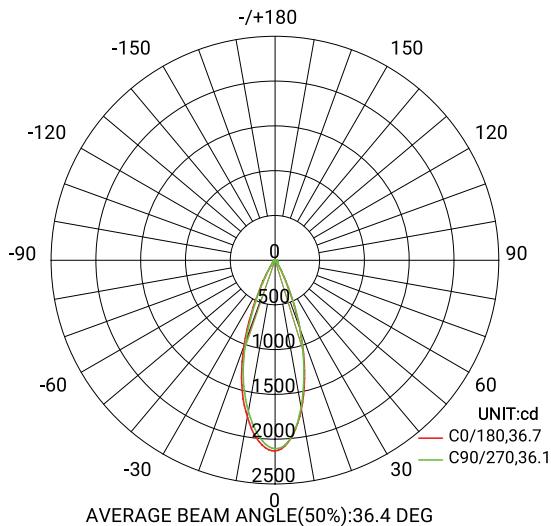

Imperial

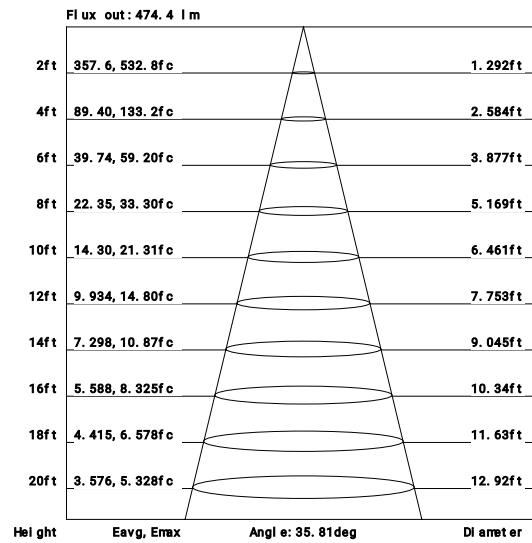

Metrics

