



45361 HIGH OUTPUT ROUND FIXED DOWNLIGHT



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase or 0-10V dimming power supply.

TYPE:		
DATE:		
NOTES:		



SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for wet location

DIMENSIONS

- Cut hole: ø2 7/8".
- Fixture: ø3 1/8" x 5"H

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC/ELV or 0-10V dimming.
- Min operating temperature (-4°F~104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 15W Integrated LED COB.
- · Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- 27K | 30K | 35K | 40K | 50K Kelvin (CCT):
- Delivered Lumen: 887 lm |942 lm |1040 lm |1077lm |1048 lm

CERTIFICATION













ORDERING GUIDE

MODEL	FINISH	DIMMING
45361-029 45361-012	Black White	Triac/ELV Triac/ELV
45361-012-0	White	0-10V

ACCESSORIES





45363-016 **NEW CONSTRUCTION SMASH PLATE** 13 1/4" x 6 1/2" ø2 3/4"



NO IC BOX REQUIRED

2700K . 3000K . 3500K . 4000K . 5000K












PRODUCT DIMENSIONS

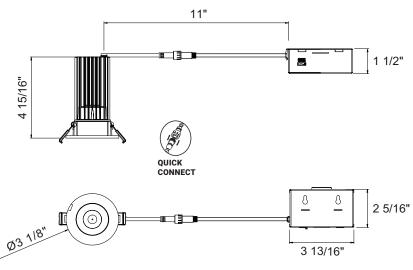







PHOTOMETRICS


Imperial






Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Metrics





Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.