


7511-12

Acrylic Transfer Tape

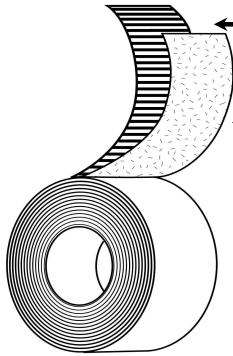

Release Liner

Liner:

12pt Polycoated Kraft

Adhesive

Adhesive:

Acrylic (I634)

Applications

- Bonding metal and plastic nameplates
- Bonding rough or irregular materials such as foam, fabrics, embossed metals, and plastics
- Joining dissimilar materials where long aging and UV resistance are needed
- Laminating to enamel, metal, glass, or wood

Features

Benefits

- Acrylic Adhesive
- High ultimate adhesion
- 12pt Polycoated Board Liner
- Excellent shear and cohesive strength
- Resists UV and rough environmental conditions
- Repositionable
- Rigid liner facilitates processing and application

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Adhesive Thickness	5.0 mils	0.127 mm	PSTC 133
Liner Thickness	11.3 mils	0.287 mm	PSTC 133
Adhesion to Steel	75 oz/in	8.21 N/cm	PSTC 101 Mod - 1 mil PET
Adhesion to Steel	175 oz/in	19.15 N/cm	PSTC 101 Mod - 2 mil Alu Foil
Shear Strength (at 72 °F)	7 Days		PSTC 107 Mod
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	-30 to 220 °F	-34 to 104 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.