


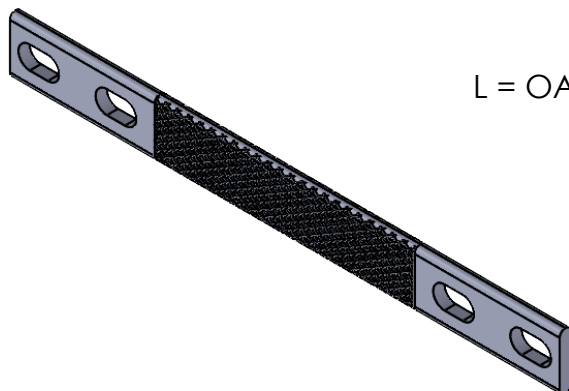

L = OAL WHEN UNRAVELED

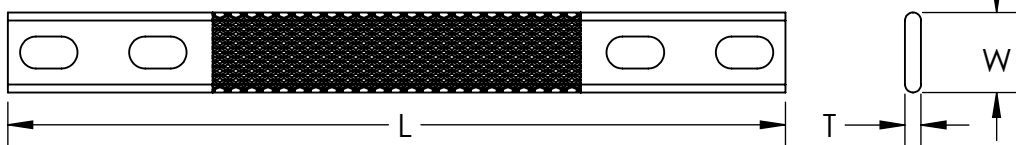
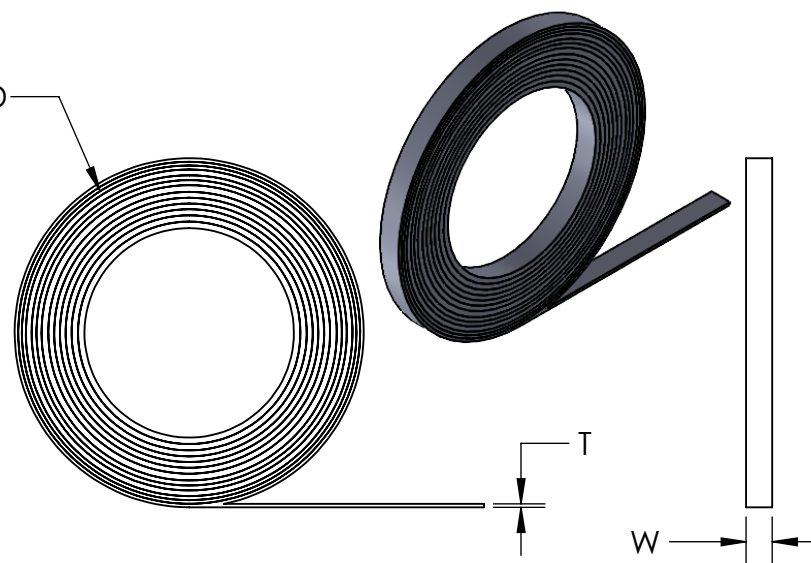


FIGURE 1

FIGURE 2

PART #	FIGURE	AMP RATING INDOORS	AMP RATING OUTDOORS	APPROX. CIRCULAR MILS	THICKNESS (T) (IN.)	EQUIVALENT AWG SIZE	LENGTH (L) (FT)	WIDTH (W) (IN.) (2 HOLE PAD ONLY)
FS1-19-8N	1	190	225	77,000	1/4	–	1.00	1.25
FS1-19-8N-18	1	190	225	77,000	1/4	–	1.50	1.25
FS1-19-8N-24	1	190	225	77,000	1/4	–	2.00	1.25
FS1-33-8N	1	330	400	154,500	7/16	–	1.00	1.25
FS1-33-8N-18	1	330	400	154,500	7/16	–	1.50	1.25
FS1-33-8N-24	1	330	400	154,000	7/16	–	2.00	1.25
FS2-60-8N	1	600	720	463,000	7/16	–	1.00	1.25
SA382B	2	–	–	–	3/64	#9 AWG	25	0.375
SA382C	2	–	–	–	3/64	#9 AWG	100	0.375
SA582B	2	–	–	–	1/16	#6 AWG	25	0.50
SA582C	2	–	–	–	1/16	#6 AWG	100	0.50

FEATURES:

- Material: Tin plated copper
- Jumper straps (FA) use standard 1/2" mounting holes, NEMA spaced
- Ground straps (SA) is used for shield & lead-sheath grounding & is easily soldered to lead, copper, & tinned metals