


TurboShearMD



Attach to any drill for easy, clean shearing on both edges of cut. Cut either direction, as scrap spirals out of tool path when cutting. The Double-Cut TurboShear removes a narrow spiral scrap from the tool path to produce a clean, straight edge on both sides of the cut. Approach a cut from either end to produce a quality work-piece edge. Also navigate up to 90° outside profiles of metal roofing panels, or metal ductwork, and cut through seams!



TSMD
Pat. No. 9,649,702

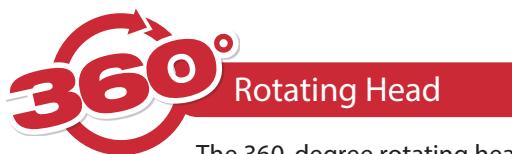

The 360-degree rotating head allows users to position and lock the drill so it doesn't interfere with material for quick, hassle-free cuts every time!



Drill Requirements:

1/4 in. (6.35 mm) Chuck,
Min. 14.4V - DC, Max 7A-AC

Capacities: Spiral Duct 20 ga. 0.040 in. (1.02 mm) /
Galvanized Steel - 18 ga. 0.052 in. (1.32 mm) / Mild
Steel - 18 ga. 0.048 in. (1.22 mm)

Catalog Number	Description	Net Wt. oz. (g)	Net Wt. lbs. (kg)
TSMD	Double Cut TurboShear	—	2.6 (1.18)
Replacement Parts			
TSDC	TurboShear Drill Clamp	8 (227)	—
TSCG	TurboShear Chuck Guard	.96 (27)	—
TSMDRB	Double Cut TurboShear Replacement Blades	5.6 (159)	—