

FIGURE 1


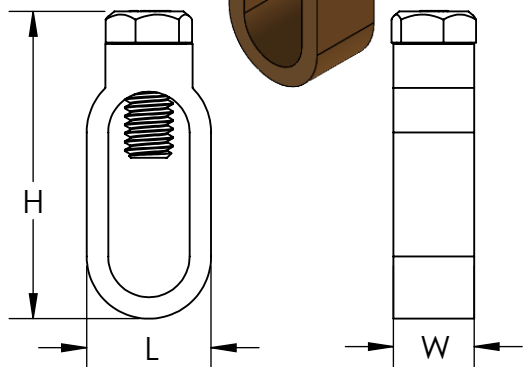


FIGURE 2






FIGURE 3

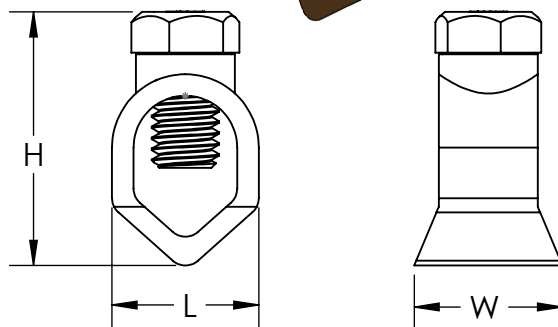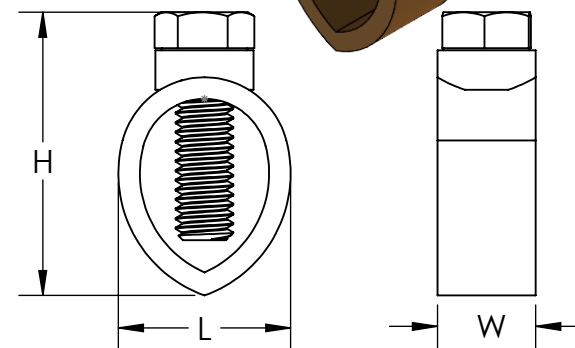

PART #	SCREW MATERIAL	FIGURE	CERTIFICATION	GROUND WIRE RANGE	GROUND ROD SIZE (IN)	REBAR SIZE (IN)	LENGTH (L) (IN)	WIDTH (W) (IN)	HEIGHT (H) (IN)
GRC-38	SILICON BRONZE	2	-	#4 - #10 AWG	3/8	-	0.68	0.81	1.19
GRC-50	STAINLESS STEEL	2	cULus	#2 - #10 AWG	1/2	3/8	0.83	0.65	1.41
GRC-50-SB	SILICON BRONZE	1	cULus	#2 - #10 AWG	1/2	3/8	0.83	0.53	1.45
GRC-58	STAINLESS STEEL	1	cULus	1/0 - #10 AWG	5/8	1/2	0.92	0.61	1.68
GRC-58-SB	SILICON BRONZE	1	cULus	#2 - #10 AWG	1/2 - 5/8	1/2	0.93	0.63	1.59
GRC-58H	SILICON BRONZE	2	cULus	1/0 STR - #8 SOL	5/8	1/2	0.93	1.01	1.65
GRC-34	STAINLESS STEEL	2	cULus	#2 - #10 AWG	3/4	5/8	1.11	0.69	1.75
GRC-34H	SILICON BRONZE	2	UL	1/0 - #8 AWG	3/4	5/8	1.08	0.98	1.98
GRC-100H	STAINLESS STEEL	2	cULus	4/0 STR - #8 SOL	1	1/2 - 5/8	1.35	1.06	2.41
GRC-3834	STAINLESS STEEL	3	cULus	1/0 STR - #10 SOL	3/8 - 3/4	3/8 - 5/8	1.03	0.64	1.86

FEATURES:

- For direct burial in earth and concrete
- Rod Clamp body is made from Aluminum Bronze
- Can be used with rebar and ground rods
- Class B/C and solid copper conductor only
- UL467 listed, Grounding and Bonding