Toll Free: 87 PERMATEX
(877-376-2839)

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Rust Preventative Automotive Undercoating

AAM Revised 04/26

PRODUCT DESCRIPTION

Permatex® Automotive Undercoating is a specially formulated blend of coating materials designed to provide durable protection against corrosion. It allows for effective coating thickness buildup to enhance coverage and long-term performance. The product dries to a firm, flexible, tack-free film with excellent abrasion resistance, making it ideal for protecting automotive underbodies from road debris, moisture, and harsh environmental conditions.

PRODUCT BENEFITS


- Seals & insulates
- Resists chipping
- Will not sag or drip

TYPICAL APPLICATIONS

- Automotive frames and under-bodies
- Rocker panels
- Wheel wells

DIRECTIONS FOR USE

1. For best adhesion, apply to clean and dry surfaces.
2. Tap bottom of can to loosen agitator ball. Shake can for at least two minutes after ball is loose (agitator ball may stick to bottom of can for some time).
3. Apply a uniform coating, holding can 10-12 inches away from surface area. Multiple coatings are more effective.

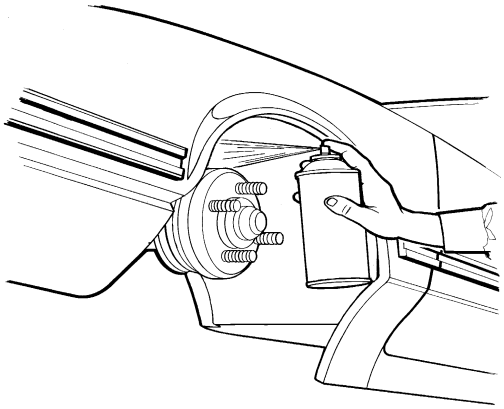

4. Allow 15 to 20 minutes drying time between coats.
5. Use mineral spirits or kerosene for cleanup.
6. After use, invert container and discharge in order to clear valve and actuator of residue.
   Note:
   DO NOT apply closer than 10 inches to the exhaust system
   DO NOT apply at temperatures below 50°F

PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Asphalt
Appearance	Brown/Black liquid film
Odor	Petroleum
Flash Point	Aerosol, contents under pressure, consult MSDS
NFPA 704 Flammability Rating	4 (Highly Flammable)

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
80072 (117EA)	20 oz. aerosol can

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° to 28°C (46° to 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE – (1-87PERMATEX)

Permatex is a trademark of Permatex, Inc. ©2026 All rights reserved.