



Work, Perform, Outlast,

In 1950, Mark Keymer, a young steel supply salesman, manufactured and marketed a pipe crimper he had invented for installing metal ductwork in heating systems. He insisted on quality construction, setting the benchmark for the new company. The rest is Malco history. Customer brand loyalty, carefully cultivated over the past 75 years, reflects Malco's commitment to innovative, dependable, high-performance hand tools and accessories for specialized markets in the heating, ventilation, air-conditioning, and refrigeration (HVACR) industry; exterior remodeling field, including roofing, siding, and gutter installation; fence, deck, and rail installation. We create work saving products that make the tough jobs easier. The pros do more, Malco distributors sell more.



Proudly Supporting The Trades

Malco is proud to support students learning a trade and the hard-working professionals who use Malco tools day in and day out. Each school term, Malco recognizes outstanding graduating students in the HVAC / sheet metal and building construction fields through the Head of the Class Student Recognition Program.

Milestone

Malco will be celebrating 75 years with some exciting contests in 2025, visit our website www.malcotools.com for more info!



The History of Malco.....

Malco is Born

Mark Keymer, a steel supply salesman, founds Malco in 1950 and establishes a legacy of innovation, efficiency, and quality.

Mark develops unique compound leverage hand tools for job-site metal fabrication.

Company Growth

The 60s were comprised of continued company growth, personally training sales reps, new product development/updates, and ramping up trade show attendance.

Malco's sales rep force, an essential link to wholesale distribution, grows to provide national coverage. Mark started hosting educational "Tool School" sessions to enhance product knowledge and high customer service standards.

To further enhance user efficiency and control, sleek



control, sleek
vinyl grips were
added to
existing
compound
leverage tools.

The Move West

The 70s included the big move to Annandale, MN, which is where the current U.S. Malco headquarters is located, as well as entering a new product market, releasing Zip-in® Screws, and experiencing a shift in leadership.



Mark Keymer retires as president with his son Gerry taking leadership.

Big Changes

The 80s brought big changes to Malco's internal processes and packaging, which streamlined plant operations and enhanced distributor merchandising efforts

The first skin carding line begins operation in the Packaging Department. The peggable packaging was designed to enhance product visibility, enabling wholesale distributors to have more effective merchandising.

Malco invests in internal systems and in-house educational programs on Manufacturing Resource Planning,



Just-In-Time Production System, and Statistical Process Control.

1950s 1960s 1970s 1980s

What's your favorite **Malco Tool?**

AVs® Snips

"My offset AVs. Both red and greens are in my bag that goes into every service call/install right off the back. Extremely versatile tools."





C-RHEX® Cleanable-Reversible, Magnetic Hex Drivers

"C-RHEX 1/4 to 5/16 or 5/16 to 3/8 my new favorite 3/8 to 7/16. I dont have to carry multiple Hex drivers."

TurboShears®

"I would have to say TurboShears because they are fun to use and make cutting sheet metal quicker and easier. I like how effortlessly they cut through material."



TurboCrimper®

"Malco TurboCrimper. It crimps faster and better than anything else I've ever used."



Hand Seamers

"Hand seamers, they are just plain better than any other brand."



Setting Hammer

"I have owned a Malco Setting Hammer for my whole 20 year career. Malco makes tools that last."



"My Andy Snips. They were some of the first tools I ever bought and I have never replaced the blades. It still cuts as good as if it was brand new."



A Shift in **Ownership**

Many big milestones occurred in the 90s, with Malco revolutionizing their product development and purchasing process, releasing many new tools, going online, and shifting ownership.

On the eve of Malco's 50th anniversary, Gerry Keymer sells his share of the



company to begin the process of transferring ownership of Malco to an Employee Stock Ownership Plan (ESOP).

Innovation

Malco entered the 21st century with breakthrough innovation and student recognition. This decade features the release of the original TurboShear® drill attachment that sparked the development of other power-assisted

tools, the creation of ergonomic Redline® Handles, and the introduction of the "Head of the Class" Program.

C-RHEX®unleashed This recent decade encompassed a

new market venture, exciting product updates/releases, enhanced sustainability initiatives, majority employee ownership, and company awards.

Malco introduces an exclusive, dual-sided 1/4 in. and 5/16 in. C-RHEX® Cleanable, Reversible Magnetic Hex



Driver with 2 in. length that rapidly becomes a best-selling tool in the HVAC market.

Currently....

Malco was acquired by Aspen Pumps Group in 2024. The acquisition resulted in tremendous value for Malco's ESOP participants. With outstanding strategic, cultural and commercial synergies Malco becomes the headquarters for Aspen Pumps Group North America securing future growth.







2010s 2020s 1990s 2000s

TABLE OF CONTENTS

HISTORY2-3
NEW PRODUCTS6-9
HEX DRIVERS / FASTENERS
C-RHEX® CLEANABLE, REVERSIBLE, HEX DRIVERS10-15
ZIP-IN® DRILL AND TAP SCREWS16-17
BIT-TIP® DRILL AND TAP SCREWS18-19
CONNEXT® HEX DRIVERS, HANDLES, AND KITS20-23
BLUE IMPACT GRADE HEX DRIVERS24-25
ROBERTSON® / PHILLIPS HEX DRIVERS26
QUICK-CHANGE™ EXTENSION BITS26
MAGNETIC BIT HOLDER / ADAPTERS26
4IN1 NUT DRIVER / 6IN1 REVERSIBLE DRIVER27
DRILL ATTACHMENTS - HOLE CUTTERS & TURBOCRIMPER
POWER ASSISTED HOLE CUTTERS AND BITS28-29
TURBOCRIMPER® IMPACT30-31
SNIPS / SEAMERS / CRIMPERS / NOTCHERS / PUNCHES
ANDY® SNIPS32-35
MAX2000® AVIATION SNIPS36-37
AV'S® AVIATION SNIPS38-39
AV'S® MINI AVIATION SNIPS40
ULTRA LIGHTWEIGHT SNIPS - METAL41
FORGED STEEL SNIPS41
REDLINE® SEAMERS42-43
REDLINE® CRIMPERS44-45
REDLINE® HAND NOTCHERS/SNAP LOCK PUNCH44-45
TOOL KITS
HVAC TOOL KITS46
TOOLBAG/BACKPACK47
DRILL ATTACHMENTS - TURBOSHEARS®
TURBOSHEARS® DRILL ATTACHMENTS48-53
HVAC METAL FABRICATION TOOLS
MINI-BRAKE®54
MINI-BRAKE® PAN-STYLE55
FOLDING TOOLS56
DUCT STRETCHERS57
REDLINE® METAL HOLE PUNCH58
DUCT TOOLS58
CHEET METAL HAMMEDS

DUCT RIPPER59
SCRIBES / SCRATCH AWLS / TRAMMEL POINTS/ DIVIDERS60
DAMPERS / SINGLE CRIMPER61
RADIANT HEATING TOOLS
PEX TO FOAM BOARD STAPLER / STAPLES62
PEX TO WOOD STAPLER / STAPLES63
SMART TOOL™ / SMART CLIP™ FASTENERS64
PEX UNCOILER65
REDLINE®: PEX TO WIRE TOOL / WIRE CLIPS66
TUBE CUTTERS67
METAL ROOFING TOOLS
DRIP EDGE FOLDING TOOLS68
SEAMER AND TONGS68
3-STATION EDGE ROLLER69
METAL CUTTING CIRCULAR SAW BLADE69
METAL BENDERS / STANDING SEAM CUTTER & SEAMER70-75
STONE COATED METAL ROOFING CUTTER76
GUTTER TOOLS / ACCESSORIES
GUTTER OUTLET PUNCH AND DIES77
GUTTER SCREW GUIDE78
GUTTER NAIL DRIVER78
TRIM NAIL PUNCHES78
REDLINE® GUTTER SNAP LOCK PUNCH79
REDLINE® DOWNSPOUT 5 BLADE CRIMPER79
SINGLE CRIMPER79
BLIND RIVETS / RIVET GUNS80-81
HAND HELD MAGNETIC SWEEP81
FLEXIBLE DUCT TOOLS
FLEX DUCT TIE TOOLS82
FLEX DUCT SUPPORT83
NYLON TIES83
FLEX DUCT CUTTER84
FLEX DUCT SHEAR84
FLEX DUCT MULTI-PURPOSE SHEAR85
DUCT KNIFE85
FIBERGLASS DUCTBOARD WASHERS85
VINYL SIDING TOOLS
REDLINE® VINYL NAIL HOLE SLOT PUNCH86



All Malco tools and accessories carry a limited lifetime warranty against manufacturing defects in materials or workmanship. Go to www.malcotools.com and visit our distributor tab for detailed warranty information.

REDLINE® VINYL SNAP LOCK PUNCH86
VINYL SNAP LOCK PUNCH86
REDLINE® VINYL J-CHANNEL CUTTERS87
VINYL ULTRA LIGHTWEIGHT SNIPS88
$ANDY^{\text{\tiny{TM}}}SNIPS:ULTRASHARPVINYL,MULTI-PURPOSESNIPS88$
SIDESWIPER® II VINYL SIDING REMOVAL TOOL89
VINYL CUTTING CIRCULAR SAW BLADES89
FIBER CEMENT SIDING TOOLS
FIBER CEMENT SIDING GAUGE, ADJUSTABLE90
FIBER CEMENT OVERLAP GAUGES90
FIBER CEMENT FACING GAUGE90
FIBER CEMENT SPEED SET GAUGES90
FIBER CEMENT HIDDEN NAIL CUTTER91
REDLINE® FIBER CEMENT SNIP91
FIBER CEMENT ANGLE CUTTER92
FIBER CEMENT GUILLOTINE SHEAR93
FIBER CEMENT CIRCULAR SAW BLADES93
QUICK ACTION™ HOLE SAWS94
HOLE IN ONE® HOLE SAW95
VENT SAW®95
CHAIN LINK FENCING TOOLS
CHAIN LINK FENCE HOG RING PLIERS96
CHAIN LINK FENCE HOG RINGS96-97
CHAIN LINK FENCE STAPLERS97
CHAIN LINK FENCE PLIERS98
CHAIN LINK FENCE MULTI-PURPOSE PLIERS99
CHAIN LINK FENCE TENSIONERS99
OFFSET RATCHET WRENCH99
VINYL FENCING TOOLS
VINYL FENCING TOOLS VINYL FENCE NOTCHERS100
VINYL FENCE NOTCHERS100
VINYL FENCE NOTCHERS100 VINYL CUTTING CIRCULAR SAW BLADES101

LAMINATE FLOORING GUILLOTINE SHEAR101

115



How to Videos:

Check out our online video collection featuring our most popular tools! These professionally made videos feature demonstrations, tips and advice for our HVACR, Roofing, Siding, Gutter and Fencing Tools markets.

Customer Service:

1-320-274-7387 / 1-800-328-3530 / Fax: 1-800-206-6760 U.S.: customerservice@malcotools.com International: international@malcotools.com

Distributor Locator:

To locate a Malco Distributor nearest you, go to www.malcotools.com, click on "Where to Buy." Search our comprehensive network to find a Malco dealer near you or browse through our online vendors.

Malco Tools, Inc. | 14080 State Hwy 55 NW | Annandale , Minnesota U.S.A. 55302-0400 | © 2025





(Star)

SEE PAGE 14

(Square)

Metal Benders by

Standing Seam Metal Roofing installation and removal just got easier!









SEE PAGES 73-75



Longer & Faster Cuts








High Performance Caulk Guns for Every Application



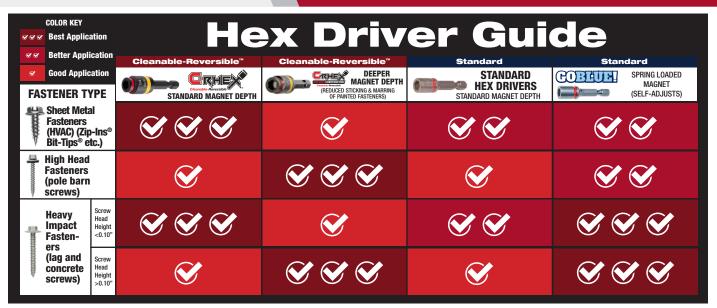





Specifications

*DISTRIBUTORS ENTER PO IN INCREMENTS OF 36

C-RHE	C-RHEX [®] Cleanable, Reversible, Magnetic Hex Drivers (SAE)											
Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	O/A Length					
Number	Description	Coded	Reaction	in. (mm)	in. (mm)	in. (mm)	in. (mm)					
MSHC*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 1/4 / Yellow 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	2 (50.8)					
MSHLC*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 1/4 / Yellow 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	2-5/8 (66.675)					
MSHMLC*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 1/4 / Yellow 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	4 (101.6)					
MSHXLC *	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 1/4 / Yellow 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	6 (152.4)					
MSHC1*	Cleanable, Reversible Hex Driver	O	Magnetic	Blue 3/8 / Yellow 5/16 (9.525-7.9375)	1/4 (6.35)	1/2 (12.7)	2 (50.8)					
MSHLC1*	Cleanable, Reversible Hex Driver		Magnetic	Blue 3/8 / Yellow5/16 (9.525-7.9375)	1/4 (6.35)	1/2 (12.7)	2-5/8 (66.675)					
MSHMLC1*	Cleanable, Reversible Hex Driver	O	Magnetic	Blue 3/8 / Yellow 5/16 (9.525-7.9375)	1/4 (6.35)	1/2 (12.7)	4 (101.6)					
MSHXLC1*	Cleanable, Reversible Hex Driver	• •	Magnetic	Blue 3/8 / Yellow 5/16 (9.525-7.9375)	1/4 (6.35)	1/2 (12.7)	6 (152.4)					







Specifications

*DISTRIBUTORS ENTER PO IN INCREMENTS OF 36

C-RHEA* Cleanable, Reversible, Magnetic nex Drivers (Metric)											
Catalog		Color		Hex Opening	Insert Dia.	Nose Dia.	0/A Length				
Number	Description	Coded	Reaction	mm	in. (mm)	in. (mm)	in. (mm)				
MSHCM1*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 6 / Yellow 8	1/4 (6.35)	1/2 (12.7)	2 (50.8)				
MSHMLCM1*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 6 / Yellow 8	1/4 (6.35)	1/2 (12.7)	4 (101.6)				
MSHXLCM1*	Cleanable, Reversible Hex Driver	• •	Magnetic	Red 6 / Yellow 8	1/4 (6.35)	1/2 (12.7)	6 (152.4)				
MSHCM2*	Cleanable, Reversible Hex Driver	•	Magnetic	Yellow 8 / Blue 10	1/4 (6.35)	1/2 (12.7)	2 (50.8)				
MSHMLCM2*	Cleanable, Reversible Hex Driver	•	Magnetic	Yellow 8 / Blue 10	1/4 (6.35)	1/2 (12.7)	4 (101.6)				
MSHXLCM2*	Cleanable, Reversible Hex Driver	\bigcirc \bigcirc	Magnetic	Yellow 8 / Blue 10	1/4 (6.35)	1/2 (12.7)	6 (152.4)				
MSHCM3*	Cleanable, Reversible Hex Driver		Magnetic	Orange 7 / Yellow 8	1/4 (6.35)	1/2 (12.7)	2 (50.8)				
MSHMLCM3*	Cleanable, Reversible Hex Driver	O	Magnetic	Orange 7 / Yellow 8	1/4 (6.35)	1/2 (12.7)	4 (101.6)				
MSHXLCM3*	Cleanable, Reversible Hex Driver	• •	Magnetic	Orange 7 / Yellow 8	1/4 (6.35)	1/2 (12.7)	6 (152.4)				





MSH2XLC2

8 in.

Specifications

MSHMLC2

4 in.

*DISTRIBUTORS ENTER PO IN INCREMENTS OF 36
**SINGLE HANG TAG PACKAGING SOLD IN INCREMENTS OF 1

12 in.

C-RHE	X [®] Cleanable, Revers	sible, Mag	netic Hex Drivers (SAE,)		
Catalog Number	Description	Reaction	Hex Opening in. (mm)	Insert Dia. in. (mm)	Nose Dia. in. (mm)	O/A Length in. (mm)
MSHC2*	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	2 (50.8)
MSHMLC2*	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	4 (101.6)
MSHXLC2*	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	6 (152.4)
MSH2XLC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	8 (203.2)
MSH3XLC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	10 (254)
MSH4XLC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	12 (304.8)
MSHC3**	Cleanable, Reversible Hex Driver	Magnetic	3/8 & 7/16 (9.53-11.11)	1/4 (6.35)	5/8 (15.9)	2 (50.8)
MSHMLC3**	Cleanable, Reversible Hex Driver	Magnetic	3/8 & 7/16 (9.53-11.11)	1/4 (6.35)	5/8 (15.9)	4 (101.6)
MSHXLC3**	Cleanable, Reversible Hex Driver	Magnetic	3/8 & 7/16 (9.53-11.11)	1/4 (6.35)	5/8 (15.9)	6 (152.4)
IMSHC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	2 (50.8)
IMSHMLC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	4 (101.6)
IMSHXLC2**	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	6 (152.4)



C-RHE	C-RHEX [®] Sawtooth Cleanable, Reversible, Magnetic Hex Drivers (SAE)											
Catalog			Hex Opening	Insert Dia.	Nose Dia.	O/A Length						
Number	Description	Reaction	in. (mm)	in. (mm)	in. (mm)	in. (mm)						
MSHCST	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	2 (50.8)						
MSHXLCST	Cleanable, Reversible Hex Driver	Magnetic	1/4 & 5/16 (6.35-7.93)	1/4 (6.35)	1/2 (12.7)	6 (152.4)						
MSHCST3	Cleanable, Reversible Hex Driver	Magnetic	3/8 & 7/16 (9.53-11.11)	1/4 (6.35)	5/8 (15.9)	2 (50.8)						
MSHXLCST3	Cleanable, Reversible Hex Driver	Magnetic	3/8 & 7/16 (9.53-11.11)	1/4 (6.35)	5/8 (15.9)	6 (152.4)						





Easy maintenance and versatile storage



Secure Precise Fit:

Reduced screw wobble, slipping, and tip-out



Color-Coded Sockets:

Quick socket size identification



Ultra-Powerful Magnet:

Ensures a secure hold for hassle-free fastening



Secure Socket Storage Retention:

C-RHEX® sockets stay securely stored on the shaft



Impact Rated:

Works with any driver or can be used with the CONNEXT3® handle by Malco



















C-RH	C-RHEX [®] Cleanable, Reversible, Magnetic 7-in-1 Sets											
Catalog			Hex Opening	0/A Length								
Number	Description	Reaction	in. (mm)	in. (mm)								
MTP2	7-in-1 Flip Bit Set, #2 Phillips	Magnetic	● ○ ● ● ● 1/4 & 5/16 (6.3-7.9), 11/32 & 3/8 (8.7-9.5), 7/16 & 1/2 (11.1-12.7)	4-3/4 (120.6)								
MTS2	7-in-1 Flip Bit Set, #2 Robertson	Magnetic	● ○ ● ● ● 1/4 & 5/16 (6.3-7.9), 11/32 & 3/8 (8.7-9.5), 7/16 & 1/2 (11.1-12.7)	4-3/4 (120.6)								
MTT25	7-in-1 Flip Bit Set, T25	Magnetic	● ○ ● ● ● 1/4 & 5/16 (6.3-7.9), 11/32 & 3/8 (8.7-9.5), 7/16 & 1/2 (11.1-12.7)	4-3/4 (120.6)								





Perfectly Paired for Maximum Accessibility and Productivity!

- C-RHEX® Hex Drivers feature reversible 1/4 & 5/16 inch and 5/16 & 3/8 inch hex sockets for quick changes between sizes
- Varying lengths and slim 1/4 & 5/16 inch hex sockets allow easy access to tight areas
- Built with an easy-clean magnet, eliminate pesky metal shavings by removing the socket and wiping with a glove or shop towel
- One-piece driver strength
- CONNEXT® Handles are shock and shatter proof.
- Handles feature a quick connector mechanism for fast hex driver changes
- Premium Zipper Pouch has belt clip and carabiner for portability, built-in magnetic panel to hold fasteners, and velcro pouch on the front for extra storage





Specifications

Catalog

Number Description

CRHEXKIT1 Five C-RHEX® Cleanable, Reversible, Magnetic Hex Drivers with 1/4 & 5/16 in. hex sizes in 2 in. (MSHC), 4 in. (MSHMLC), and 6 in. (MSHXLC) lengths and 5/16 & 3/8 in. hex sizes in 2 in. (MSHC1), and 6 in. (MSHXLC1) lengths.

CRHEXKIT2 Five C-RHEX® Cleanable, Reversible, Magnetic Hex Drivers with 1/4 & 5/16 in. hex sizes in 2 in. (MSHC), 4 in. (MSHMLC), and 6 in. (MSHXLC) lengths and 5/16 & 3/8 in. hex sizes in 2 in. (MSHC1), and 6 in. (MSHXLC1) lengths and two CONNEXT®

Quick Change Handles (CONNEXT1) standard, and (CONNEXT2) Stubby handles.








U.S. Patent No. 10,328,554

Eliminate Magnet Damage.

The Ultimate System is designed to eliminate magnet damage. C-RHEX 1/4 in. and 5/16 in. hex drivers perfectly fit Zip-in and Bit-Tip screws without touching & damaging the magnet.

Save Time and Money!

The Ultimate System extends the life-span of C-RHEX hex drivers, while using the most trusted sheet metal screws on the market!



Easily remove metal shavings from the magnet by removing the socket and wiping it off!



Zip-in° **Self-Piercing** Sheet Metal Screws

Rated #1, Zip-in® screws are the best selling sheet metal screws worldwide.

A unique thread design and quality controlled manufacture spell the Zip-in® difference.

Zip-in's® sophisticated heat treat process allows the screw to taper to a fine, sharp point without sacrificing critical point strength. They are also faster driving, with a greater capacity for fastening heavier gauges of sheet metal than any other self-drilling type.



- One 1/4 in, hex driver accommodates tall sizes of Zip-in screws.
- Full 1/4 in. (No. 8) head will not strip out of hex driver opening at any ring operation.
- 2.) Undercut-Indented Hex Washer Slotted Head
- Undercut Always seats flush.
- 3.) Combination Lead Double Thread
- Starting thread machined down to very tip of screw point.
- Instantly penetrates and engages in heavy gauge sheet metal and layered light gauge.
- 4.) Sharp Tapered Point
 - Quality controlled heat treat.
 - Sharp tapered point will not mushroom, break or walk
- · Complete operator control with precise hole alignment.





Zinc Plated

Combination Lead



U.S. Patent No. D524,638



Look for the Dots! ® Trademarked & Patented Head Markings indicate one and only genuine Zip-ins®.

Robertson® Style Square



Plastic Anchors / Kits



screws. Flexible anchor is ideal for masonry or stone. Lip on collar prevents anchor from pushing through hole in hollow walls.



Painted Sheet Metal / Drill-In Screws



Painted Sheet Metal Screws Packaged in Bags and Tubs.



Self-Piercing

Sheet Metal Screws







Specifications

Bulk	Bulk Qty.	Pail	Pail Qty.	Tub	Tub Qty.	Bag	Bag Qty.	Head Color	Head Size	Туре
Zip-in® Sc										
HW6X3/8Z	18,000			HW6X3/8ZT	1,000	HW6X3/8ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW7X1/2Z	15,000	HW7X1/2ZP	7,500	HW7X1/2ZT	1,000	HW7X1/2ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW8X1/2Z	12,000	HW8X1/2ZP	7,000	HW8X1/2ZT	1,000	HW8X127G	100	Zinc Plated	1/4 in.	Slotted Hex
HW8X3/4Z	10,000	HW8X3/4ZP	5,000	HW8X3/4ZT	1,000	HW8X3/4ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW8X1Z	7,000	HW8X1ZP	3,500	HW8X1ZT	500	HW8X1ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW8X11/2Z	4,500	HW8X1-1/2ZP	2,250	HW8X11/2ZT	250	HW8X11/2ZG	50	Zinc Plated	1/4 in.	Slotted Hex
HW8X2Z	2,300	HW8X2ZP	1,400	HW8X2ZT	250	HW8X2ZG	50	Zinc Plated	1/4 in.	Slotted Hex
HW10X1/2Z	10,000			HW10X1/2ZT	1,000	HW10X1/2ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW10X3/4Z	8,000			HW10X3/4ZT	1,000	HW10X3/4ZG	100	Zinc Plated	1/4 in.	Slotted Hex
HW10X1Z	6,000			HW10X1ZT	500	HW10X1ZG	100	Zinc Plated	1/4 in.	Slotted Hex
Zip-in® Sq	uare Pan I	Head Roberts	on® Style	Screws						
PS8X1/2Z	12,000			PS8X1/2ZT	1,000			Zinc Plated	#2	Pan Square
Zip-in® W	hite Painte	d Register Sc	rews							
HW8X11/2ZW	4,500			HW8X11/2ZWT	250	HW8X11/2ZWG	i 50	O White	1/4 in.	Slotted Hex
HW8X2ZW	2,300			HW8X2ZWT	250	HW8X2ZWG	50	O White	1/4 in.	Slotted Hex
HW8X3ZW				HW8X3ZWT	150	HW8X3ZWG	25	O White	1/4 in.	Slotted Hex
P08X2ZW	2,300			P08X2ZWT	250	P08X2ZWG	50	O White	#2	Phillips
Zip-in® Pa	inted Shee	et Metal Scre	ws							
HW6X3/8ZRB	18,000			HW6X3/8ZRBT	1,000	HW6X3/8ZRBG	100	Royal Brown (RB)	1/4 in.	Slotted Hex
HW6X3/8ZW	18,000			HW6X3/8ZWT	1,000	HW6X3/8ZWG	100	White (W)	1/4 in.	Slotted Hex
HW7X1/2ZRB				HW7X1/2ZRBT	1,000	HW7X1/2ZRBG	100	Royal Brown (RB)	1/4 in.	Slotted Hex
HW7X1/2ZW				HW7X1/2ZWT	1,000	HW7X1/2ZWG	100	O White (W)	1/4 in.	Slotted Hex
HW8X3/4ZRB				HW8X3/4ZRBT	1,000	HW8X3/4ZRBG	100	Royal Brown (RB)	1/4 in.	Slotted Hex
HW8X3/4ZW				HW8X3/4ZWT	1,000	HW8X3/4ZWG	100	O White (W)	1/4 in.	Slotted Hex
HW8X1ZRB	7,000			HW8X1ZRBT	500	HW8X1ZRBG	100	Royal Brown (RB)	1/4 in.	Slotted He
HW8X1ZW	7,000			HW8X1ZWT	500	HW8X1ZWG	100	O White (W)	1/4 in.	Slotted Hex
Drill-in Sci		A, Single Th	read							
HW10X1-1/2	3,500			HW10X11/2T	250	HW10X11/2G	50	O Zinc Plated	5/16	Slotted Hex
HW10X2	2,400			HW10X2T	250	HW10X2G	40	O Zinc Plated	5/16	Slotted He
HW12X2	1,800			HW12X2T	250	HW12X2G	25	O Zinc Plated	5/16	Slotted He

Tub Number	Tub Qty.	Bag Number	Bag Qty.	Anchor Size	Screw Size	For Screw Size	Uses Bit Diameter	Anchor Kit Quantity
Red Lip	Plastic Anch	ors						
PA810T	1,000	PA810G	100	3/16 x 7/8 in.		8-9-10	3/16 in.	_
PA1012T	500	PA1012G	75	1/4 x 1 in.		10-12	1/4 in.	_
Red Lip	Plastic Anch	or Kits w	ith Slotted	Panhead Scre	ews			
PA1012K	_	_	_	1/4 x 1 in.	SP10x1-1/4	_	1/4 in.	100
Red Lip	Plastic Anch	or Kits w	ith White F	lex Washer He	ead Screws			
PA1012KW	_	_	_	1/4 x 1 in.	HW10x1Z	_	1/4 in.	100





Eliminate Magnet Damage.

The Ultimate System is designed to eliminate magnet damage. C-RHEX® 1/4 in. and 5/16 in. hex drivers perfectly fit Zip-in® and Bit-Tip® screws without touching & damaging the magnet.



Save Time and Money!

The Ultimate System extends the life-span of C-RHEX® hex drivers, while using the most trusted sheet metal screws on the market!

- Malco's exclusive, dual-sided magnetic hex drivers are simple to change hex sizes with 2-EZ Technology.
- Easily remove metal shavings from the magnet by removing the socket and wiping it off!

Bit-Tip Drill & Tap Screws

The One-Operation Fastener with a True Drilling Action Point

Bit-Tip drill and tap screws produce the optimum hole size for a quick tight fit.

Now even faster!

Drill & Tap Screws drill their own holes, taps a matching thread in steel .220 thick in less time than it takes to drill a pilot hole for other standard fasteners.









Top View



Hex Slotted Washers



The Bit-Tip Difference!

By drilling its own hole, Bit-Tip® produces the optimum hole size, resulting in better thread engagement and a tighter fit. One-operation fastening also means no alignment problems.

Bit-Tip® has a wide range of industry applications. Select the Bit-Tip® that's right for the job. Point length will determine metal thickness that can be drilled, tapped, and fastened.

Also, plywood, soft wood, composition board, drywall, insulation, and laminates may be fastened to metal framing or components.

Made from strong, high quality, specially heat treated steel. Bit-Tip® Self Drilling and Tapping Screws are precision cold forged insuring uniformity of dimension and drill point contours.

The versatile Bit-Tip® Screw is an excellent replacement for fastening operations now using rivets, nuts and bolts, spot welds, or adhesives. Bit-Tip® also eliminates the need for costly auxiliary fastening equipment such as drill bits, taps and welding equipment.

Requires only a standard screw gun power tool rated at 2500 RPM equipped with drilling depth locator.





Look for the Dots! ® Trademarked & Patented Head Markings indicate one and only genuine Bit-Tip®.





JCI EWS

Industrial Applications:

- Structural / Layered Metal
- Duct Work

BT164

4,000

Specifications





			-			, Designation .	5,000				
Bulk	Bulk Qty	Pail	Pail Qty.	Tub	Tub Qty.	Bag	Bag Qty.	Head Type	Screw Size	Driver Size	Material Thickness*
Bit-Ti	® Screws	(#2 Point)									
BT131	10,000			BT131T	1,000	BT131G	100	Hex Washer	8-18x1/2	1/4	.035100
BT132	10,000			BT132T	500	BT132G	100	Hex Washer	8-18x5/8	1/4	.035100
BT133	10,000			BT133T	500	BT133G	100	Hex Washer	8-18x3/4	1/4	.035100
BT134	8,000			BT134T	500	BT134G	100	Hex Washer	8-18x1	1/4	.035100
BT141	10,000			BT141T	500	BT141G	100	Hex Washer	10-16x1/2	5/16	.035110
BT142	8,000			BT142T	500	BT142G	100	Hex Washer	10-16x5/8	5/16	.110175
BT143	7,000	BT143P	3,000	BT143T	500	BT143G	100	Hex Washer	10-16x3/4	5/16	.110175
BT231	10,000			BT231T	1,000	BT231G	100	Slotted Hex	8-18x1/2	1/4	.035100
BT233	10,000			BT233T	500	BT233G	100	Slotted Hex	8-18x3/4	1/4	.035100
Bit-Ti	o® Screws	(#3 Point)									
BT144	5,000			BT144T	500	BT144G	100	Hex Washer	10-16x1	5/16	.110175
BT153	5,000			BT153T	500	BT153G	100	Hex Washer	10-24x3/4	5/16	.110175
BT156	3,500			BT156T	500	BT156G	50	Hex Washer	10-24x1-1/2	5/16	.110175
Bit-Ti	o® Screws	(#3 Point)									
BT163	6,000			BT163T	500	BT163G	100	Hex Washer	12-14x3/4	5/16	.110210

BT164G

100

Hex Washer

5/16

.110-.210

12-14x1

Bit-Tip Screw Strength

BT164T

500

				Pull-out values (lbs.), in common steel gauges									Tensil Strength	Torsional Strength	
			26	24	22	20	18	16	14	13	1/8	10	3/16	lbs.	in lbs.
8	18	#2	150	187	289	334	507	643	977					1,575	42
10	16	#2	145	235	295	364	572	708	1,015	1,972				2,100	61
10	24	#3								1,528	2,120	2,199		2,350	65
12	14	#3								1,541	1,990	2,650	3,515	2,800	92



^{*} Test results furnished are given purely as a guide and do not constitute a warranty of any type. Results may vary by modification to the fastener or in certain applications.







Individual Hex Drivers

Hex Drivers shown here are sold separately. See page 23 for bulk packages.



Magnetic Hex Drivers Long Style (Bulk Tub of 50)



Magnetic Hex Drivers (Bulk Tub of 100)



Magnetic Hex Drivers Extra Long Style (Bulk Box of 50)







Reverse

Locked

CONNEXT


Replacement Handles

Clear, molded acetate grips are shock-proof, shatter-proof and fluted to fit any hand. Including ratcheting handle!



CONN	EXT [®] Magnetic Stubby	Lengt	h Hex H	and <u>Driv</u>	rers						
						D'-	Haldan Bia	Ol#-T-4		Oursell Lawrette	01-4
Catalog Number	Description	Color Coded	Reaction	Hex Opening in. (mm)		lose Dia. n. (mm)	Holder Dia. in. (mm)	Shaft Tot Lgth. in. (Overall Length in. (cm)	Shaft Replacement #
IHD1T	CONNEXT Stubby Hex Hand Driver	•	Magnetic	1/4		/16 (11.1125)	11/16 (17.462	25) 2-1/4 (57	7.15)	4-1/8 (104.775)	MSH14
HHD2T	CONNEXT°Stubby Hex Hand Driver	0	Magnetic	5/16	1/4 (6.35) 1	/2 (12.7)	11/16 (17.462	25) 2-1/4 (57	7.15)	4-1/8 (104.775)	MSH516
HHD3T	CONNEXT°Stubby Hex Hand Driver	•	Magnetic	3/8	1/4 (6.35) 9	/16 (14.2875)	11/16 (17.462	25) 2-1/4 (57	7.15)	4-1/8 (104.775)	MSH38
CONN	EXT [®] Standard Magnet	tic Hex	Hand D	rivers							
Catalog		Color		Hex Opening	Insert Dia. Nose	Dia.	Holder Dia.	Shaft Total		Overall Length	Shaft
Number	Description	Coded	Reaction	in. (mm)	in. (mm) in. (m	ım)	in. (mm)	Lgth. in. (n	nm)	in. (mm)	Replacement #
HHD1S	CONNEXT [®] Standard Lgth. Hex Hand Driver		Magnetic	1/4	1/4 (6.35) 7/16	(11.1125)	11/16 (17.4625)	3 (76.2)		7-1/8 (180.975)	MSHL14
HHD2S	CONNEXT Standard Lgth. Hex Hand Driver		Magnetic	5/16	1/4 (6.35) 1/2 (12.7)	11/16 (17.4625)	3 (76.2)		7-1/8 (180.975)	MSHL516
HHD3S	CONNEXT*Standard Lgth. Hex Hand Driver	•	Magnetic	3/8	1/4 (6.35) 9/16	(14.2875)	11/16 (17.4625)	3 (76.2)		7-1/8 (180.975)	MSHL38
CONN	EXT [®] Long Magnetic H	ex Han	d Drive	rs							
Catalog		Color		Hex Opening	Insert Dia. Nose	Dia Ho	older Dia.	Shaft Total		Overall Length	Shaft
Number	Description	Coded	Reaction	in.	in. (mm) in. (m		. (mm)	Lgth. in. (mm)	in. (mm)	Replacement #
HHD1	CONNEXT*Long Hex Hand Driver	•	Magnetic	1/4	1/4 (6.35) 7/16	(11.1125) 11	/16 (17.4625)	6-7/8 (174.6	25)	10-1/2 (266.7)	MSHXL14
HHD2	CONNEXT*Long Hex Hand Driver	0	Magnetic	5/16	1/4 (6.35) 1/2 (12.7) 11	/16 (17.4625)	6-7/8 (174.6	25)	10-1/2 (266.7)	MSHXL516
HHD3	CONNEXT*Long Hex Hand Driver	•	Magnetic	3/8	1/4 (6.35) 9/16	(14.2875) 11	/16 (17.4625)	6-7/8 (174.6	25)	10-1/2 (266.7)	MSHXL38
Short	Magnetic Hex Drivers										
	magnetic fick brivers										
Catalog Number	Description	Color Coded	Reaction	Hex Openii in.	ng Insert Dia. in. (mm)	Nose Di in. (mm		erall Length (mm)	Distrib Buy Q		
MSH14		Coded		1/4					виу ц 10	MSH14P	
	Short Magnetic Hex Driver		Magnetic		1/4 (6.365)	7/16 (1				WISH 14P	
MSH14T	Short Magnetic Hex Driver (TUB of 100)	<u> </u>	Magnetic	1/4	1/4 (6.35)			3/4 (44.45)	100	MCUE4C	n
MSH516 MSH516T	Short Magnetic Hex Driver Short Magnetic Hex Driver (TUB of 100)	0	Magnetic Magnetic	5/16 5/16	1/4 (6.35) 1/4 (6.35)	1/2 (12 1/2 (12		3/4 (44.45) 3/4 (44.45)	100	MSH516I	
	Short wagnetic flex briver (10b of 100)		Mayneuc	3/10	1/4 (0.33)	1/2 (12	2.1) 1-0)/4 (44.43)	100		
	Short Magnetic Hex Driver Magnetic Hex Drivers	•	Magnetic	3/8	1/4 (6.35)	9/16 (1	14.2875) 1-3	3/4 (44.45)	10	MSH38P	
Catalog	Magnetic Hex Drivers	Color		Hex Openi	ng Insert Dia.	Nose Dia.	. Ov	verall Length	Dist	ributor	
Long L	Magnetic Hex Drivers Description		Reaction	Hex Openi in.	ng Insert Dia. in. (mm)	Nose Dia. in. (mm)	. Ov	verall Length (mm)	Dist Buy	ributor Qty. 2 Pack	ID.
Long L Catalog Number MSHL14	Magnetic Hex Drivers Description Long Magnetic Hex Driver	Color Coded	Reaction Magnetic	Hex Openi in. 1/4	ng Insert Dia. in. (mm) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11	. Ov in. .1125) 2-	verall Length . (mm) 9/16 (65.0875)	Distr Buy	ributor	IP
Long L Catalog Number MSHL14 MSHL14T	Magnetic Hex Drivers Description Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50)	Color Coded	Reaction Magnetic Magnetic	Hex Openi in. 1/4 1/4	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11	. 0v in. .1125) 2 .1125) 2	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875)	Distr Buy 5	ributor Qty. 2 Pack MSHL14	
Long L Catalog Number MSHL14 MSHL14T MSHL516	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver	Color Coded	Reaction Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7	. 0v in. .1125) 2- .1125) 2- 7) 2-	rerall Length (mm) 9/16 (65.0875) 9/16 (65.0875)	Distr Buy 5 50 5	ributor Qty. 2 Pack	
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50)	Color Coded	Reaction Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.7	. 0v in1125) 21125) 27) 27) 2	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distr Buy 5 50 5	ributor Qty. 2 Pack MSHL14	16P
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver	Color Coded	Reaction Magnetic Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.)	. Ov in1125) 21125) 27) 27) 22875) 2-	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distribution 5 5 50 5 50 5	ributor Qty. 2 Pack MSHL14 MSHL51	16P BP
Long I Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver	Color Coded O	Reaction Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.7	. Ov in1125) 21125) 27) 27) 22875) 2-	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distr Buy 5 50 5	ributor Qty. 2 Pack MSHL14	16P BP
Long I Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver	Color Coded O	Reaction Magnetic Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.)	. Ov in1125) 21125) 27) 27) 22875) 2-	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distribution 5 5 50 5 50 5	ributor Qty. 2 Pack MSHL14 MSHL51	16P BP
Long I Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver	Color Coded O	Reaction Magnetic Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.)	. Ov in1125) 21125) 2 7) 2 7) 2 2875) 2 7.4625) 2	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distr Buy 5 50 5 50 5	ributor Qty. 2 Pack MSHL14 MSHL51	16P BP
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver	Color Coded O O O O O O O O O O O O O O O O O O O	Reaction Magnetic Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.	. Ov in1125) 21125) 2 7) 2 7) 2 7, 4625) 2 1. Ov	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long I Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver	Color Coded Coded Coded Coded Coded	Reaction Magnetic Magnetic Magnetic Magnetic Magnetic Magnetic Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in.	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17	. Ov in1125) 21125) 27) 27) 27,4625) 2 Ov in Ov in.	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) verall Length (mm) (101.6)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHML14 MSHML14	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded Coded Coded Coded Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14 11/16 (17 Nose Dia. in. (mm) 7/16 (11 7/16 (11	. Ov in1125) 21125) 27) 27) 27, 4625) 2 Or in 1.1125) 4 1.1125) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) verall Length (mm)	Distribution Distri	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHML14 MSHML14 MSHXL14	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded Coded Coded Coded Coded Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia. in. (mm) 7/16 (11 7/16 (11	. Ov in1125) 21125) 27) 27) 22875) 27, .4625) 28. Or in .1.1125) 4 .1.1125) 6 .1.1125) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) verall Length (mm) (101.6) (152.4)	Dist Buy 5 50 5 5 5 5 5 5 5 5 1 1 1 1 5	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHML14 MSHXL14 MSHXL14 MSHXL14T	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50) Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia. in. (mm) 7/16 (11 7/16 (11 7/16 (11 1/2 (12.7	. Ov in1125) 21125) 27) 27) 270 271.4625) 271.4625) 271.4625) 4 .1125) 6 .1125) 6 .1125) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10 (101.6) 11 (101.6) 11 (101.6) 11 (101.6) 11 (101.6)	Dist Buy 5 50 5 5 5 5 5 5 5 5 1 1 1 5 5 1	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL516T MSHL716 Extra Catalog Number MSHML14 MSHML14 MSHML14 MSHML14 MSHML14 MSHXL14T MSHML14T MSHML14T	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50) Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 1/4 5/16 5/16	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia. in. (mm) 7/16 (11 7/16 (11	. Ov in1125) 21125) 27) 27) 270 271.4625) 271.4625) 271.4625) 4 .1125) 6 .1125) 6 .1125) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) verall Length (mm) (101.6) (152.4)	Dists Buy 5 50 5 50 5 5 Dist Buy 1 1 50 1	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14 MSHXL14 MSHXL14 MSHXL14T MSHML516 MSHXL516 MSHXL516	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1)	. Ov in1125) 21125) 27) 27) 27, 4625) 21.1125) 4 .1.1125) 6 .1.1125) 6 .7) 4 .7) 6 .7) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL516T MSHL716 Extra Catalog Number MSHML14 MSHML14 MSHXL14T MSHML14 MSHXL14T MSHML516 MSHXL516	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50) Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 1/4 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 17/16 (11 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1	. Ov in1125) 21125) 27) 27) 27, 4625) 21.1125) 4 .1.1125) 6 .1.1125) 6 .7) 4 .7) 6 .7) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10 (101.6) 10 (101.6) 10 (101.6) 10 (101.6)	Dists Buy 5 50 5 50 5 5 Dist Buy 1 1 50 1	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14 MSHXL14 MSHXL14 MSHXL14 MSHXL14T MSHML516 MSHXL516 MSHXL516 MSHXL516T MSHXL38	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1)	. Ov in1125) 21125) 27) 27) 27, 4625) 21.1125) 4 .1.1125) 6 .1.1125) 6 .7) 4 .7) 6 .7) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14T MSHML14 MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL38	Description Long Magnetic Hex Driver Long Magnetic Hex Driver Long Magnetic Hex Driver (TUB of 50) Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16 5/16 5/16 5/16	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 1/16 (11 1/16 (11 1/12 (12.1 1/2 (12.1 1/2 (12.1 9/16 (14.1	. Ov in1125) 21125) 27) 27) 28. Oi in .1.1125) 4 .1.1125) 6 .1.1125) 6 .1.1125) 6 .7) 4 .7) 6 .7) 6 .7) 6	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 1/10 (65.0875) 1/10 (101.6)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL3E MSHL71 tributor Qty.	16P BP
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL516T MSHL516 MSHL716 Extra Catalog Number MSHML14 MSHXL14	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver (TUB of 50)	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16	ng Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 1/16 (11 1/16 (11 1/12 (12.1 1/2 (12.1 1/2 (12.1 9/16 (14.1	. Ov in1125) 21125) 27) 27) 270 274625) 274625) 274625) 6 .1125) 6 .1125) 6 .70 6 .71 6 .71 6 .71 6 .71 6 .71 6 .72 6 .73 6 .74 6 .75 7 .75 7 .7	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875) 9/16 (15.0875)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14T MSHXL3T MSHXL3	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 3/8 Grip Lgth. in. (mm)	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1	. Ov in1125) 21125) 27) 27) 270 274625) 274625) 274625) 6 .1125) 6 .1125) 6 .70 6 .71 6 .71 6 .71 6 .71 6 .71 6 .72 6 .73 6 .74 6 .75 7 .75 7 .7	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 1/10 (101.6	Dist Buy 5 50 5 5 5 5 5 5 5 1 1 1 50 1 1 5 1 5 1	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71 tributor Qty.	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL516 MSH	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 3/8 Grip Lgth. in. (mm) 4-1/8 (10.	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (14.1 11/16	. Ov in1125) 21125) 27) 27) 22875) 21. On in .1.1125) 4 .1.1125) 6 .1.1125	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 1/10 (101.6	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71 tributor Qty. Overall Length in. (mm)	16P BP
Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 MSHL14T MSHL14T MSHL14T MSHML516 MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL516 MSHXL51	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded Coded	Reaction Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 3/8 Grip Lgth. in. (mm) 4-1/8 (10.	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (14.1 11/16	. Ov in1125) 21125) 27) 27) 22875) 27.4625) 21.1125) 4 .1.1125) 6	rerall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 1/10 (65.0875) 9/16 (65.0875) 1/10 (152.4)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71 tributor Qty. Overall Length in. (mm) 5-1/4 (133.35)	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL516 MSHXL516T MSHXL38 CONN Catalog Number CONNEXT1 CONNEXT2	Description Long Magnetic Hex Driver Extra Long Magnetic Hex Driver	Color Coded	Reaction Magnetic 1 Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16 3/8 Grip Lgth. in. (mm) 4-1/8 (10-4) 1-7/8 (47-4)	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (14.1 11/16	. Ov in1125) 21125) 27) 27) 22875) 27.4625) 21.1125) 4 .1.1125) 6	rerall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 1/10 (65.0875) 9/16 (65.0875) 1/10 (152.4)	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71 tributor Qty. Overall Length in. (mm) 5-1/4 (133.35)	16P BP
Long L Catalog Number MSHL14 MSHL14T MSHL516 MSHL516T MSHL38 MSHL716 Extra Catalog Number MSHML14 MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL14T MSHXL16T MSHXL516 MSHXL516T MSHXL38 CONN Catalog Number CONNEXT1	Description Long Magnetic Hex Driver Extra Long Ma	Color Coded	Reaction Magnetic 1 Magnetic	Hex Openi in. 1/4 1/4 5/16 5/16 3/8 7/16 Hex Openi in. 1/4 1/4 5/16 5/16 5/16 3/8 Grip Lgth. in. (mm) 4-1/8 (10-4) 1-7/8 (47-4)	Insert Dia. in. (mm) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35) 1/4 (6.35)	Nose Dia. in. (mm) 7/16 (11 1/2 (12.7 1/2 (12.7 9/16 (14.1 11/16 (17 Nose Dia in. (mm) 7/16 (11 7/16 (11 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (12.1 1/2 (14.1 11/16	. Ov in1125) 21125) 27) 27) 22875) 27.4625) 28. Or in .1125) 6 .1125) 6 .1125) 6 .7) 4 .7) 6 .7) 6 .2875) 6 er Dia 6 (17.4625) 6 (17.4625)	verall Length (mm) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 9/16 (65.0875) 10.1016 10	Distribution Distribution	ributor Qty. 2 Pack MSHL14 MSHL51 MSHL38 MSHL71 tributor Qty. Overall Length in. (mm) 5-1/4 (133.35)	16P BP

CONNEXTS Ratcheting Style Handle Long Forward, Reverse, Locked Comp. 1/2 solid shaft 1-1/8 (28.575) 4-1/8 (104.775) 1/4 Hex 5/8 (15.875) 1-5/8 (41.275) 6-3/8 (161.925)

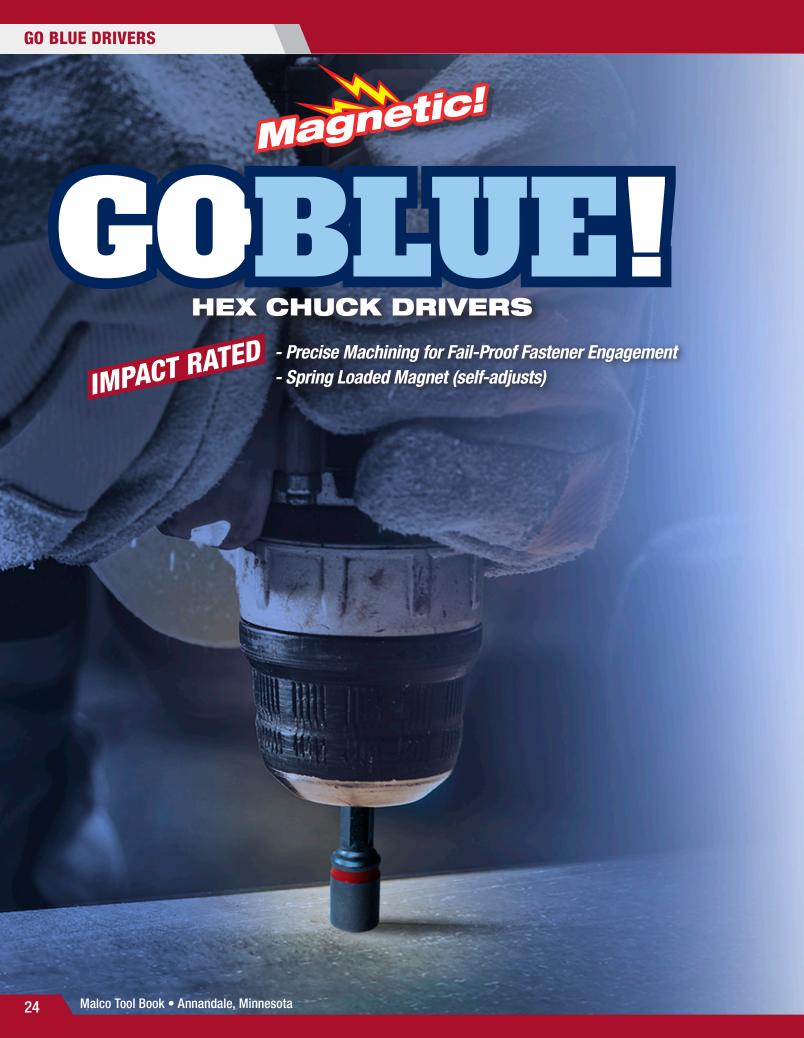



Impact Rated Hex Drivers, Square, Phillips, and Star Bits and Hex Drivers. Star, Phillips and Square bit selections feature unique high-torque steel construction and a design that absorbs and dissipates impact driver induced stress at peak loads.



Spe	cificati	ons	5											
Catalog Number	Description	Point Size	HEX Insert in. (mm)	OA Length in. (mm)	Qty.	Catalog Number	Description	Color Coded	Hex Opening in.	HEX Insert in. (mm)	Reaction	Nose Diameter in. (mm)	OA Length in. (mm)	Qty.
Square	Insert Bits					Short M	lagnetic Hex Drivers							
SD1IP	Square Insert Bit	#1	1/4 (6.35)	1 (25.4)	3	MSH14I	Short Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	10
SD2IP	Square Insert Bit	#2	1/4 (6.35)	1 (25.4)	3	MSH14IS	Short Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	1
Square	Power Bits					MSH14IT	Short Magnetic Hex Driver	•	1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2 (50.8)	100
SD1XIP	Square Power Bit	#1	1/4 (6.35)	2 (50.8)	3	MSH516I	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	10
SD2XIP	Square Power Bit	#2	1/4 (6.35)	2 (50.8)	3	MSH516IS	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	1
Phillips	Insert Bits					MSH516IT	Short Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2 (50.8)	100
PH2IP	Phillips Insert Bit	#2	1/4 (6.35)	1 (25.4)	3	MSH38I	Short Magnetic Hex Driver	•	3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2 (50.8)	10
PH3IP	Phillips Insert Bit	#3	1/4 (6.35)	1 (25.4)	3	MSH38IS	Short Magnetic Hex Driver	•	3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2 (50.8)	1
Phillips	Power Bits					Long M	agnetic Hex Drivers							
PH2XIP	Phillips Power Bit	#2	1/4 (6.35)	2 (50.8)	3	MSHL14IS	Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	2-9/16 (65.1)	1
PH3XIP	Phillips Power Bit	#3	1/4 (6.35)	2 (50.8)	3	MSHL14IT	Long Magnetic Hex Driver		1/4	1/4 (6).35	Magnetic	7/16 (11.1125)	2-9/16 (65.1)	50
Star In:	sert Bits					MSHL516I	Long Magnetic Hex Driver	<u> </u>	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	10
TX10IP	Star Insert Bit	T10	1/4 (6.35)	1 (25.4)	3	MSHL516IS	Long Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	1
TX15IP	Star Insert Bit	T15	1/4 (6.35)	1 (25.4)	3	MSHL516IT	Long Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	2-9/16 (65.1)	50
TX20IP	Star Insert Bit	T20	1/4 (6.35)	1 (25.4)	3	MSHL38I	Long Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2-9/16 (65.1)	10
TX25IP	Star Insert Bit	T25	1/4 (6.35)	1 (25.4)	3	MSHL38IS	Long Magnetic Hex Driver		3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	2-9/16 (65.1)	1
TX27IP	Star Insert Bit	T27	1/4 (6).35	1 (25.4)	3	MSHL716I	Long Magnetic Hex Driver		7/16	1/4 (6.35)	Magnetic	11/16 (17.4625)	2-9/16 (65.1)	10
TX30IP	Star Insert Bit	T30	1/4 (6.35)	1 (25.4)	3	MSHL716IS	Long Magnetic Hex Driver		7/16	1/4 (6.35)	Magnetic	11/16 (17.4625)	2-9/16 (65.1)	1
Star Po	wer Bits													
TX10XIP	Star Power Bit	T10	1/4 (6.35)	2 (50.8)	3	Extra L	ong Magnetic Hex Dri	ivers						
TX15XIP	Star Power Bit	T15	1/4 (6.35)	2 (50.8)	3	MSHML14IS	Extra Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	4 (101.6)	1
TX20XIP	Star Power Bit	T20	1/4 (6.35)	2 (50.8)	3	MSHXL14IS	Extra Long Magnetic Hex Driver	•	1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	6 (152.4)	1
TX25XIP	Star Power Bit	T25	1/4 (6.35)	2 (50.8)	3	MSHXL14IT	Extra Long Magnetic Hex Driver		1/4	1/4 (6.35)	Magnetic	7/16 (11.1125)	6 (152.4)	50
TX27XIP	Star Power Bit	T27	1/4 (6.35)	2 (50.8)	3	MSHML516IS	Extra Long Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	1/2 (12.7)	4 (101.6)	1
TX30XIP	Star Power Bit	T30	1/4 (6.35)	2 (50.8)	3	MSHXL516IS	Extra Long Magnetic Hex Driver	<u> </u>	5/16	1/4 (6.35)	Magnetic	9/16 (14.2875)	6 (152.4)	1
						MSHXL516IT	Extra Long Magnetic Hex Driver	0	5/16	1/4 (6.35)	Magnetic	9/16 (14.2875)	6 (152.4)	50
	in. = inches	, 0A = 0v	verall			MSHXL38IS	Extra Long Magnetic Hex Driver	•	3/8	1/4 (6.35)	Magnetic	9/16 (14.2875)	6 (152.4)	1
								in.	= inches, OA = 0	Overall				





Specifications

Robertson® Style Square Head Hex Bits

- Fully hardened Square tip will not cam out
- #1 and #2 drivers available in 1-3/4 in. and 2-1/2 in. lengths

Number	Description	Point Size	Color	in. (mm)	in. (mm)	Qty.
SD1	Square Head Hex Bit	#1		1/4	1-3/4 (44.45)	10
SD1P	Square Head Hex Bit	#1		1/4	1-3/4 (44.45)	2
SD2	Square Head Hex Driver	#2		1/4	1-3/4 (44.45)	10
SD2P	Square Head Hex Driver	#2	•	1/4	1-3/4 (44.45)	2
SDX1	Square Head Hex Driver	#1		1/4	2-1/2 (63.5)	10
SDX1P	Square Head Hex Driver	#1		1/4	2-1/2 (63.5)	2
SDX2	Square Head Hex Driver	#2	•	1/4	2-1/2 (63.5)	10
SDX2P	Square Head Hex Driver	#2	•	1/4	2-1/2 (63.5)	2

1/4 in	1/4 in. Hex Shank Phillips Bits									
MBSP2	Hex Shank Phillips Insert Bit	#2	_	1/4	1 (24.5)					
MBLP2	Hex Shank Phillips Driver	#3		1/4	1-15/16 (49.21)					
MBLP3	Hex Shank Phillips Driver	#2		1/4	1-15/16 (49.21)					
MRI P4	Hex Shank Phillips Driver	#2	_	1/4	2-3/4 (69.85)					



One-Handed Quick Release!

A Fast and Easy Push-in Style Receiver,

with 3 Ball Bearing Detents holds any 1/4 -inch hex shank power groove or insert bit securely. Retract the collar only when removing bit.

Impact Rated Steel Construction

make these durable extensions versatile for use with any Impact Driver or Malco CONNEXT® Handle!





Magne	tic Bit Holder				
Catalog Number	Description	Hex Opening in.	Shank Dia. in.	Nose Dia. in. (mm)	Overall Length in. (mm)
MBH14	Magnetic Bit Holder	1/4	1/4	7/16 (11.1125)	3 (76.2)

4 in 1 Nut Driver

Quickly change hex sizes.

Malco's exclusive, dual-sided magnetic hex drivers fit over a magnet-tipped, ball locking hex shaft, and can be quickly reversed to change sizes.



Positive Lock

A quick-release, secure positive lock secures telescoping shaft in position and prevents collapsing when forceful in-line pressure is applied during use.



3 Position Combinations

The 4-in-1 Nut Driver is perfect for pocket or pouch, and offers superior performance, ease of use and long service life. The driver shaft can be extended or retracted to produce three different end to end combinations: 1/4 and 5/16 in.; 3/8 and 5/16 in.; and 1/4 and 7/16 in.



Sure Fastener Engagement

Hardened chrome vanadium steel sockets offer sure fastener engagement and control. The comfortable 3-lobe handle is made of high-torque ABS plastic, and a non-slip TPR over-molded grip offers additional comfort and control on the job.



Two Package Types

Available in Single Packs and 12 Pack Box Display!



Nut Drive	er				
Catalog		Tool Length	Net Weight		
Number	Description	Hex Sizes	in. (mm)	oz. (g)	Qty.
4IN1	4IN1 Nut Driver	1/4, 5/16, 3/8, 7/16 in.	5-1/4 (133.35)	7 (199)	12 (display box)
4IN1i	4IN1 Nut Driver (Single)	1/4, 5/16, 3/8, 7/16 in.	5-1/4 (133.35)	7 (199)	1

6 in 1 Reversible Driver

Six different Head Styles with one Tool!

Combination bits change to drive 6 different head styles or sizes. 1/4 & 5/16 in. Hex opening nut driver with 3/16 & 9/32 in. slotted head bit and #1 & #2 Phillips head bit. Shank firmly locks into handle barrel. Driver bits are individual protected with black oxide. Shank is chrome plated to protect against rust.

RD6

Revers	ible Driver		
Catalog			Tool Length
Number	Description	Bit Styles	in. (mm)
RD6	6IN1 Reversible Driver	1/4 - 5/16, 3/16 - 9/32 in., #1 - #2 Phillips	7 (177.8)



RD6



The Real Difference **Gold Standard Cutter Bits**

install into the chuck of any impact or drill as small as 1/4 in. (6.35 mm).

Malco cutter bits feature a long lasting, mill type cutting edge and large flat for adjusting the cutting edge location up or down to extend bit life. One cutter bit fits either model and is easily replaceable. Available in single (CB), 6-pack (CBB), and 100-pack bulk tub (CB100).





Specifications (£

Catalog Number	Description	Steel Type	Hole Diameter in. (mm)	Net Wt. oz. (g)
HC1	Hole Cutter	_	2-12 (50.8-304.8)	16 (454)
HC2	Hole Cutter	_	2-20 (50.8-508)	22 (624)
СВ	Mill Type Cutter Bit (Single)	HSS (High Speed)	_	
CBB	Mill Type Cutter Bit (6 pack)	HSS (High Speed)	_	
CB100	Mill Type Cutter Bit (100 tub)	HSS (High Speed)	_	
Metal Capaciti	ies			

Metal Capacities							
	Material	Aluminum	Galvanized Steel 22 Gauge	Mild Steel 22 Gauge			
	inches (mm)	.054 (1.37)	.034 (.86)	.0299 (0.759)			









CBB (6-pack)

Enlarged to show detail

CB100 (100-pack tub)



Hex Key is provided with

purchase of new tool.

6. HC1G - Shoe 7. HC1I - Shoe Screw

8. HC1B - Pivot Pin Set







Based on Actual Field Trials!

The Malco TurboCrimper® IMPACT is designed to work with a minimum 12 volt DC cordless or maximum 7 amp AC corded impact driver equipped with a quick release 1/4 inch hex chuck.

Chuck it up and Go!

No set-up or adjustment is needed to immediately begin crimping multiple sizes, types, and thickness of round metal duct, including spiral duct and metal stove pipe.

Time and Labor Saving.

Simple, effective design increases speed and ease of crimping 30 - 24 gauge (0.41 – 0.71 mm) galvanized steel round duct and (0.31 - 0.61 mm) cold rolled steel stove pipe. (minimum 3" pipe)




The compact TurboCrimper® IMPACT is easy to balance while in use and stores easily in a pouch or bag when not in use.

Operating Tips



Begin crimping at angle after crease











CE

Catalog Number	Description	Chuck Requirements	Impact Driver Requirements	Net Weight
C5A2	TurboCrimper® IMPACT	1/4 in. Quick Release	Min. 12V DC, Max 7A AC	30 oz. (848 g
Replacement Drive Shaft				
C5A2RD EV	Replacement Drive Shaft			
Metal Capa	cities			
Material	Galvanized Steel 30-24 Gauge	Cold Rolled 30-24 Gauge		
inches (mm)	.016028 (0.40-0.71)	.012024 (0.30-0.61)		

Exit crimping at slight angle before crease



Overall Length: 4" Throat Depth: 1.5"

Width of Jaw: 2"



MC12L

- Impressive maneuverability and superior material flow for up to 60%* faster cuts
- 45%* greater length of cuts vs. leading competition
- Cuts continuous radiuses half the size of leading competition with better cut quality*
- Replaceable upper blade that can easily be replaced in the field

*verified by internal testing

OFFSET DESIGN!





Sleek styling, easy blade replacement, and larger handles make Malco's 12 in. Andy™ Snips more versatile. Ideal as a vinyl siding snip or for cutting aluminum, copper, or sheet metal. A sleek head design improves maneuverability . A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy™ Snip fast and easy.



Andy™ 12 in. (31 cm)
Pattern straight
shearing, mild curve
cuts, and multiple
layers of material.



Andy™ 12 in. (31 cm) Combination L or R circles to 6 in. (15 cm) diameter and straight cuts.



HIGH CARBON

INSET BLADES
with sleek aluminum
frames for greater







M14N

Malco's 14 in. Andy™ Snip are very versatile. A sleek head design improves maneuverability. Ideal for making cuts in tight material, shapes such as J-Channel. A full 3-1/4 in. (82.6 mm) cutting length makes straight shearing with the Malco Andy™ Snip fast and easy. Blade replacement is easily accomplished in the field.



Andy™ 14 in. (36 cm) Pattern straight shearing, mild curve cuts, and multiple layers of material.

Large 14 in. (36 cm) frame with roomy handle loops and big 3-1/4 in. (82.6 mm) cutting length.



Andy[™] 14 in. (36 cm) Combination L or R circles to 6 in. (15 cm) diameter and straight cuts.

Specifications

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)	Replacement Blades
M12N	Andy [™] 12 in. (31 cm) Pattern Snip	3 (76.2)	12 (304.8)	16 (454)	M12NRB
M12NG	Andy™ 12 in. (31 cm) Pattern Snip "Gripped"	3 (76.2)	12 (304.8)	20 (567)	M12NRB
MC12L	Andy™ 12 in. (31 cm) Offset Left Snip	3 (76.2)	12 (304.8)	18 (510)	MC12LRB
MC12N	Andy [™] 12 in. (31 cm) Combination Snip	3 (76.2)	12 (304.8)	16 (454)	MC12NRB
MC12NG	Andy™ 12 in. (31 cm) Combination Snip "Gripped"	3 (76.2)	12 (304.8)	20 (567)	MC12NRB
M14N	Andy™ 14 in. (36 cm) Pattern Snip	3-1/4 (82.6)	14 (355.6)	20 (567)	M14NRB
MC14N	Andy™ 14 in. (36 cm) Combination Snip	3-1/4 (82.6)	14 (355.6)	20 (567)	MC14NRB

 Material
 Vinyl
 Aluminum
 Copper
 Annealed Stainless Steel 26 Gauge
 Galvanized Steel 24 Gauge
 Mild Steel 24 Gauge

 inches (mm)
 .055 (1.40)
 .035 (0.89)
 .023 (0.58)
 .018 (0.46)
 .028 (0.71)
 .024 (0.61)



CLASSICS

Andy™Snips Classic

Original style handles make Malco's 14 in. Andy™ Classic snips the perfect addition to any tool bag. Ideal for cutting vinyl siding, aluminum, copper, and sheet metal. A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy™ Snip fast and easy. Pressure-fit inset blades make replacement easy while out in the field.



with classic aluminum frames for greater maneuverability.



Andy™ Classic 12 in. (31 cm) Pattern straight shearing, mild curve cuts, and multiple layers of material.



and straight cuts.

Malco's original style handles make Malco's 14 in. Andy[™] Classic snips the perfect addition to any tool bag. These snips are ideal for cutting vinyl siding, aluminum, copper, or sheet metal. A full 3 in. (76.2 mm) cutting length makes straight shearing with the Malco Andy[™] Snip fast and easy. Blade replacement is easily accomplished in the field.



M14A

Andy™ Classic 14 in. (36 cm) Pattern straight shearing, mild curve cuts, and multiple layers of material. the use of a common wrench and #2 Phillips Screw Driver.


MC14A

Blades are easily replaceable with

Andy™ Classic 14 in. (36 cm) Combination L or R circles to 6 in. (15 cm) diameter and straight cuts.

Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)	Replacement Blades
M12A	Andy™ Classic 12 in. (31 cm) Pattern Snip	3 (76.2)	12 (304.8)	17 (482)	M12ARB
MC12A	Andy™ Classic 12 in. (31 cm) Combination Snip	3 (76.2)	12 (304.8)	17 (482)	MC12ARB
M14A	Andy™ Classic 14 in. (36 cm) Pattern Snip	3-1/4 (82.6)	14 (355.6)	22 (624)	M14ARB
MC14A	Andy™ Classic 14 in. (36 cm) Combination Snip	3-1/4 (82.6)	14 (355.6)	22 (624)	MC14ARB

Metal and Vinyl Capacities										
Material	Vinyl	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge				
inches (mm)	.055 (1.40)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.024 (0.61)				

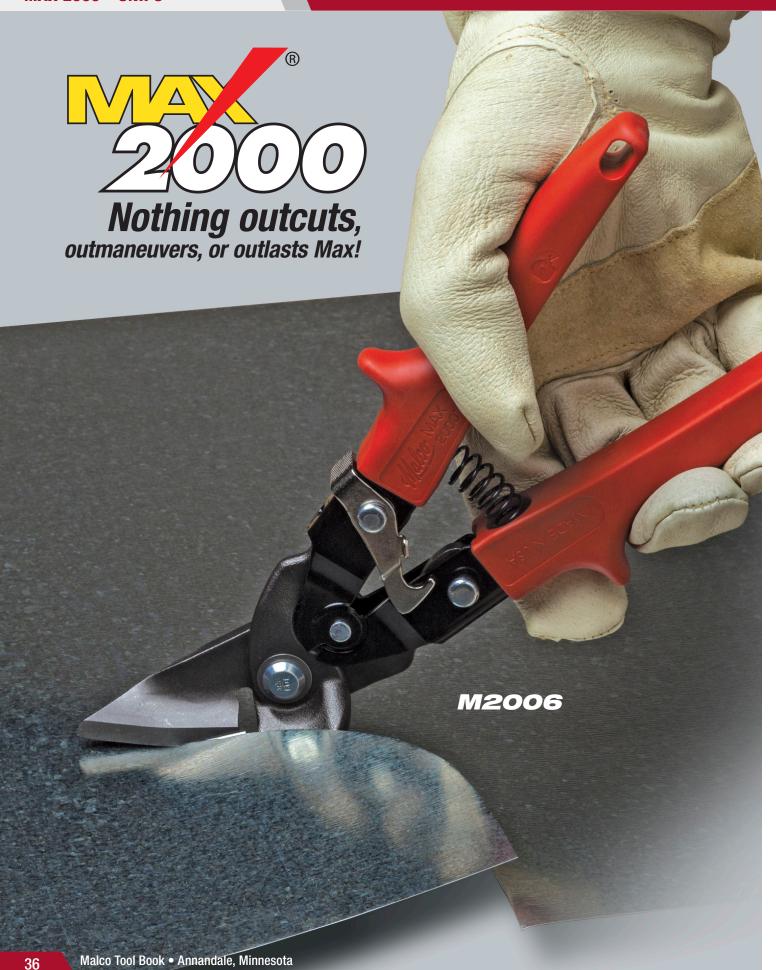





The Max2000® Double-Cut Snip employs a best of all worlds close tolerance design for consistent performance. A curved cutting edge on the center jaw reduces cutting force required and large relief grinds on all jaws minimize drag. The double cut blades feed smoothly, cut cleanly without surface distortion, and easily navigate metal seams encountered in round metal duct and stove pipe. A self-starting point on center jaw makes short work of blind cuts.



The Max2000® Bulldog Snip

features shorter blades with a serrated lower jaw for controlled notching and trimming out to the blade tip in layered sheet metals and metal seams.

Specifications

							1
Catalog				Length of Cut	Tool Length	Net Wt.	Blade
Number	Description	Cutting Application	Grip Color	in. (mm)	in. (mm)	oz. (g)	Length in. (mm)
M2001	Standard	Cuts Left	•	1-3/8 (34.9)	10 (254)	14 (397)	2.5 (25.4)
M2002	Standard	Cuts Right	•	1-3/8 (34.9)	10 (254)	14 (397)	2.5 (25.4)
M2003	Standard	Cuts Straight, Left and Right	0	1-11/16 (42.9)	10 (254)	14 (397)	2.5 (25.4)
M2004	Straight Double Cut	Straight, Double Cut	0	1-3/8 (34.9)	10 (254)	16 (454)	
M2005	Bulldog	Notching and Trimming		1-1/16 (27)	10 (254)	13 (367)	
M2006	Offset	Cuts sharp left, straight, and 5 in. (125 mm) dia. circles.	•	1-1/4 (31.8)	10 (254)	16 (454)	
M2007	Offset	Cuts sharp right, straight, and 5 in. (125 mm) dia. circles.		1-1/4 (31.8)	10 (254)	16 (454)	

Metal Capacitie	s						
	Material	Aluminum	Copper	Stainless Steel 22 Gauge	Galvanized Steel 22 Gauge	Mild Steel 22 Gauge	
M2004	inches (mm)	.040 (1.02)	.034 (0.86)	_	.034 (0.86)	.030 (0.76)	
	Material	Aluminum	Copper	Stainless Steel 20 Gauge	Galvanized Steel 18 Gauge	Mild Steel 18 Gauge	
All other Max Snips	inches (mm)	.062 (1.57)	.054 (1.37)	.038 (0.97)	.054 (1.37)	.048 (1.22)	

FITS ALL MODELS ON THIS PAGE



AVs® Series Snips Selection Guide

Standard Cut AVs®

20 ga. Stainless Steel

18 ga. Galvanized Steel

18 ga. Mild Steel

Malco AV Snip Type

Malco

Catalog Number Style Cutting Application (grip color)

Length of Cut Tool Length Tool Weight (oz.)

Best Application

Jaw Type

Metal Material Gauge Capacities

		A	1		13					ZEW	NEW!	NEW!
r	AV1	AV2	AV3	AV6	AV7	AV8	AV9	AVM6EV	AVM7EV	AV63	AV73	AV33
е		Standard		Off	set	Ver	tical	Off	set	Off	fset	Standard
n r)	Left	Right	Combo	Left	Right	Left	Right	Left	Right	Left	Right	Combo
ıt	1-3/8"	1-3/8"	1-1/2"	1-1/4"	1-1/4"	1-3/8"	1-3/8"	3/4"	3/4"	2-1/4"	2-1/4"	3"
h	9-5/8"	9-5/8"	9-7/8"	9-5/8"	9-5/8"	8-3/4"	8-3/4"	7-1/8"	7-1/8"	10-7/8"	10-7/8"	11-5/8"
.)	14	14	14	15	15	16	16	8	8	17	17	17
n	Everyday Use - Standard Field Applications							rd to Reach itions	Faster Lo	onger Cuts to	Save Time	
е	Forged							For	ged		Forged	
е				2" (1.57mn " (1.37mm)	,		0	Rolled Stee inless Steal	l		- up to .062 up to .054"	2" (1.57mm) (1.37mm)

Mini AVs®

Long Cut AVs®

20 ga. Stainless Steel

18 ga. Galvanized Steel

18 ga. Mild Steel

Malco Tool Book • Annandale, Minnesota



AVs® Left & Right Vertical Aviation Snips

Left and right cutting forged serrated edge steel jaws are set at a 90 degree angle to allow easy access when cutting sheet metal in tight spaces, or overhead.



NEW PRODUCT!

AVs® Left Offset, Right Offset & Combination Long Cut Aviation Snips

Designed with long blades to promote longer and faster cuts to reduce time and fatigue on the job site.



.024 (0.61)

Specifications Vertical Aviation Snips

_									
Catalog						Length of Cut	Tool Length	Net Wt.	
Number	Description	n Cutti	ng Application		Grip Color	in. (mm)	in. (mm)	oz. (g)	
AV1	Standard	Left	Cutting Aviation	Snip	•	1-3/8 (34.9)	9-5/8 (245)	14 (397)	
AV2	Standard	Righ	t Cutting Aviation	n Snip		1-3/8 (34.9)	9-5/8 (245)	14 (397)	
AV3	Standard	Cuts	Straight, Left an	d Right	0	1-1/2 (38.1)	9-7/8 (251)	14 (397)	
AV6	Offset	Cuts	sharp left, straig	jht, and tight dia.	circles	1-1/4 (31.8)	9-5/8 (245)	15 (425)	
AV7	Offset	Cuts	sharp right, stra	ight, and tight dia	. circles	1-1/4 (31.8)	9-5/8 (245)	15 (425)	
AV8	Vertical	Left	Cutting Vertical A	Aviation Snip		1-3/8 (34.9)	8-3/4 (222)	16 (454)	
AV9	Vertical	Righ	t Cutting Vertical	Aviation Snip		1-3/8 (34.9)	8-3/4 (222)	16 (454)	
AV63	Offset	Left	Long Cut Aviation	n Snip	•	2-1/4 (57.15)	10-7/8 (276.2)	17 (481)	
AV73	Offset	Righ	t Long Cut Aviati	on Snip	•	2-1/4 (57.15)	10-7/8 (276.2)	17 (481)	
AV33	Standard	Com	bo Long Cut Avia	tion Snip	0	3 (76.2)	11-5/8 (295.2)	17 (481)	
Metal Ca	apacities								
		Material	Aluminum	Copper	Stainless Steel 20 Ga.	Galvanized Steel 18 G	a. Mild Steel 18 Ga.	Cold Rolled Steel 24 ga.	Stainless Steel 28 ga.
AVs® Snips	1	in. (mm)	.062 (1.57)	.054 (1.37)	.036 (0.91)	.052 (1.32)	.048 (1.22)	_	_



B G performance miniaturized.



Only 7-1/8 in.

At only 7-1/8 inches (181 mm), the AVs® Mini easily goes to work in tight or awkward spaces where full-size aviation snips are challenged. A 3/4 inch (19 mm) length of cut provides the optimum speed for confined cutting applications where this small, maneuverable snip excels.

Each snip is made with forged steel jaws that contain precision-ground serrations on the lower blade, which produces a sharply defined edge for cutting accuracy and control.







Catalog				Length of Cut	Tool Length	Net Wt.
Number	Description	Cutting Application	Grip Color	in. (mm)	in. (mm)	oz. (g)
AVM6 EV	AVs® Mini	Left Cutting "MINI" Aviation Snip		3/4 (19)	7-1/8 (181)	8 (227)
AVM7 EV	AVs® Mini	Right Cutting "MINI" Aviation Snip		3/4 (19	7-1/8 (181)	8 (227)

Metal Capacitie

Material	Cold Rolled Steel 24 ga.	Stainless Steel 28 ga.
in. (mm)	.024 (0.61)	.028 (0.38)



AVM7EV

AVM6EV



Ultra Lightweight Snips

The ULC10 Ultra Lightweight Metal Cutting Snip offers a light, yet powerful option for cutting aluminum, and 26 gauge steel. The ULC10 has a strong, lightweight 10 inch polymer frame and is easy to grasp while making big 3 inch long controlled cuts. It also utilizes a fully threaded brass insert, thermally anchored in the blade area of the polymer frame. The insert offers greater holding power with no loss of thread integrity, resulting in superior performance.

- Strong, lightweight 10 in. (254 mm) polymer frame
- Easy-to-grasp, protective handle loops
- Big 3 in. (76 mm) long controlled cut
- Designed for all weather conditions
- Includes a Full-Size Handle



Worry Free Blade Changes

A fully threaded brass insert thermally anchored in the blade area of the polymer frame for holding power and no loss of thread integrity.





ULC10

Ollia El	giilweigiil e	nip			
Catalog		•	Length of Cut	Tool Length	Net Wt.
Number	Description		in. (mm)	in. (mm)	oz. (g)
ULC10	Metal Cutting	, Combination Snip	3 (76)	10 (254)	9.5 (254)
Metal Ca	pacities				
	Material	Aluminum	Galvanized Steel	26 Ga.	Mild Steel 26 Ga.
ULC10	in. (mm)	.030 (0.76)	.020 (0.51)		.018 (0.46)
Replacer	nent Blades				



<u>Ounces</u>

Pattern	, Bulldog, and Duckbill S	nips				
Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)	Sheet Metal Capacity	Stainless Steel Capacity
M9	Regular Pattern Snip	3 (76.2)	12-1/2 (317.5)	27 (766)	18 gauge	22 gauge
M15	Bulldog Pattern Snip	2-1/2 (63.5)	16-1/2 (419.1)	59.2 (1678)	16 gauge	18 gauge
MD10	Circular "Duckbill" Snip	2-1/2 (63.5)	10 (254)	13 (369)	20 gauge	26 gauge
MD12	Circular "Duckbill" Snip	3 (76.2)	12-1/2 (317.5)	27 (766)	20 gauge	22 gauge



Malco Tool Book . Annandale, Minnesota

3-1/4 in. Hand Seamers

3-1/4 in. (83 mm) Jaws with 1-1/4 inch (31.8 mm) Bending Depth

6 in. Hand Seamers

Big 6 in. (152 mm) Jaws with 1-1/4 inch (31.8 mm) Bending Depth

3-1/4 in. Hand Seamers (Offset)

3-1/4 in. (83 mm) Jaws with Offset Handles. 1-1/4 inch (31.8 mm) Bending Depth







Malco Hand Seamers with forged steel jaws, are the premier choice for bending, folding, flattening and straightening sheet metal edges or safely gripping and moving sheet metal around the job site.

Designed for the metal trades, including HVACR installation, roofing and siding applications, and commercial building and remodeling, these seamers are available in 3 inch (76.2 mm) and 6 inch (152.4 mm) jaw widths as well as an offset 3 inch (76.2 mm) size for overhead work. Depth markings graduated in 1/4 inch (6.4 mm) increments are complemented by

a powerful compound leverage design. Easily bend flanges or completely flatten seams from 1/4 to 1-1/4 inch (6.4-31.8 mm) deep in 24 gauge (0.71 mm) galvanized or (0.61 mm) mild steel. Hardened steel handles resist abuse. Powerful compound leverage design. Tool also features rust resistant nickel plating.





Big 9 in. (229 mm) Jaws
with 2 in. (51 mm) Bending Depth

PREDLINE
Up to
Die-Cast Zinc Jaws

Capacity

See With
Steel

Easy Folding Bends without ruining paint finish! Die cast zinc jaws are gentle on painted or coated metal surfaces and ideal for making clean and accurate bends and seams in aluminum roof flashing, coil stock or fascia.

The jaws feature depth graduations in 1/4 inch (6.35 mm) increments to a maximum 2 inch (50.8 mm) bending depth. The jaws of these large die cast seamers are bowed so that they will hold firmly and evenly across the entire jaw width even when engaged on very light material.

These Seamers are not warranted for use as a striking tool or for prying or bending heavy ferrous sheet metal. Durable construction offers long, dependable service life under normal use. These tools also feature rust resistant nickel plating.

Specifications

Catalog Number	Description	Jaw Depth in. (mm)	Jaw Width in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Jaws	Length in. (mm)	Net Wt. oz. (g)
S2R	3 in. Hand Seamer	1-1/4 (31.8)	3-1/4 (83)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	24 (680)
S6R	6 in. Hand Seamer	1-1/4 (31.8)	6 (152)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	30 (851)
S3R	3 in. Offset Hand Seamer	1-1/4 (31.8)	3-1/4 (83)	4.7 to 1.0 - 7.1 to 1.0	High Carbon Steel Forgings	8 (203)	24 680)
S5R	5 in. Hand Seamer	2 (50.8)	5 (127)	4.7 to 1.0 - 7.1 to 1.0	Die Cast Zinc	9 (229)	22 (624)
S9R	9 in. Hand Seamer	2 (50.8)	9 (229)	4.7 to 1.0 - 7.1 to 1.0	Die Cast Zinc	9 (229)	28 (794)

Metal Capaciti	es					
	Material	Aluminum	Copper	Stainless Steel 26 Gauge	Galvanized Steel 24 Gauge	Mild Steel 24 Gauge
S2R / S6R / S3R	inches (mm)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.024 (0.61)
S5R / S9R	inches (mm)	.029 (0.74)	_	_	_	_

Replacement Spring

5018 FITS ALL MODELS ON THIS PAGE



HANDLES by Malco

Easy Hand Motion and Greater Control:

A superior compound leverage mechanism offers maximum ease of operation. Comfortable opening and spring-actuated handles give additional comfort and control. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.



C5R with Longer, shallower crimps produced with the C5R result in a tighter fitting, more self supporting, leak-proof connection in sheet metal pipe & duct.



Both the N1R and N2R Notchers make Fast, Clean, 30° "V" shaped cuts for HVAC duct fabrication.



SL1R joins sheet metal, duct and pipe sections economically.

Malco Tool Book . Annandale, Minnesota



3-Blade Crimper



Ideal for crimping heavy 24 gauge (0.71 to 0.86 mm) galvanized sheet steel.

Long wearing steel components are nickel plated to resist elements. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.

Hand Notcher (13/16 in.)



Fast and easy cutting. Notcher makes a clean 30° "V" shaped cut in sheet metal.

13/16 in. (20.6 mm) maximum throat depth. Upper cutting jaw is drop forged high impact alloy steel. Hook design of cutting jaw facilitates notching corners or take-off tabs to desired depth without slipping. Long-wearing, hardened stamped steel components.

5-Blade Crimper



Ideal for crimping heavy 24 gauge (0.71 to 0.86 mm) galvanized sheet steel.

Long wearing steel components are nickel plated to resist elements. Ergonomic Redline Handles with unique one-hand operation latch offer maximum compound leverage performance and natural fit and feel.

Hand Notcher (1 in.)



The N2R Notcher punches a BIG 1 in. (25.4 mm) deep "V" notch in common 24 to 30 (0.71-0.41 mm) ga. galvanized sheet metal quickly and easily.

Folding and fabricating metal ductwork is easier than ever with the full 1 inch clearance the N2R single operation notcher provides. Precisionground steel upper jaw and hardened stamped steel components.

5-Blade Crimper (Offset)



Ideal offset crimper for tight-working quarters or working over-head.

A unique blade design keeps handles offset and keeps hands off work obstacles such as floor joists and underlayments. The handle design also promotes correct gripping of tool resulting in less wrist fatigue. Long wearing steel components are nickel plated to resist elements.

Snap Lock Punch (1 in.)



Join sheet metal, duct and pipe sections economically with the Snap Lock Punch.

Punches raise a louvered shaped projection on metal edge for locking into rolled edge of sheet or piece to be joined. Metal pieces snap together and are fastened securely. Compound Handle Leverage for maximum ease of operation. Punch impression spaced 3/8 in. from edge of metal. Heavy forged cutting jaw.

SINGLE CRIMPER

SEE PAGE 61

Specifications

Catalog Number	Description	Throat Depth in. (mm)	Variable Leverage Ratio (High / Low) throughout stroke	Jaws	Cutting Angle	Length in. (mm)	Net Wt. oz. (g)
SC3R	3-Blade Crimper	1-1/4 (31.8)	6.6 to 1.0 - 8.7 to 1.0	Carbon Steel	_	9 (229)	14 (397)
C5R	5-Blade Crimper	1-5/8 (41.3)	6.6 to 1.0 - 8.7 to 1.0	Carbon Steel	_	9-5/8 (244)	17 (482)
C6R	Offset Pipe Crimper	1-5/8 (41.3)	_	Carbon Steel	_	_	16 (454)
N1R	Hand Notcher	13/16 (20.6)	7.4 to 1.0 - 8.0 to 1.0	Alloy Steel Forging / Carbon Steel Shell	30°	8 (203)	16 (454)
N2R	One-Inch Hand Notcher	1 (25.4)	6.6 to 1.0 - 7.0 to 1.0	Investment Casting / Carbon Steel Shell	_	_	17 (482)
SL1R	Snap Lock Punch	3/8 (9.5)	10.8 to 1.0 - 11.7 to 1.0	Alloy Steel Forging / Carbon Steel Shell	_	8 (203)	16 (454)

Material Aluminum Copper Stainless Steel 26 Gauge Galvanized Steel 24 Gauge Mild Steel 24 Gauge .018 (0.46) .028 (0.71) .024 (0.61) Crimpers & Notchers inches (mm) .035 (0.89) .023 (0.58) Mild Steel 22 Gauge Material Aluminum Copper Stainless Steel 24 Gauge Galvanized Steel 22 Gauge SC3R .030 (0.76) inches (mm) .024 (0.61) .034 (0.86)

Replacement Spring

5018 FITS ALL MODELS ON THIS PAGE

HVAC STARTER KIT



STKMR / STKMRBP

Catalog No.	Description
C5R	Redline Pipe Crimper 5 Blade
SL1R	Redline Snap Lock Punch
N1R	Redline Hand Notcher
S2R	Redline Hand Seamer
12F	Folding Tool
18	Divider
M2001	Aviation Snip Left Cut
M2002	Aviation Snip Right Cut

M14N	14 in. (362 mm) Alum. Pattern Snip
SH3	Setting Hammer
DS2	Offset Duct Stretcher
BT143G	Bit-Tips 100 pack FREE
HW8x1/2ZG	Zip-ins 100 pack FREE
TS1	TurboShear
HC1	Hole Cutter
A2	1/4 in. (6.4 mm) Scratch Awl

HVAC DELUXE KIT



DSKR / DSKRBP

Catalog No.	Description	DB1	[
C5R	Redline Pipe Crimper 5 Blade	DS2	(
SL1R	Redline Snap Lock Punch	MSH14	Н
N1R	Redline Hand Notcher	MSH516	H
S2R	Redline Hand Seamer	L9M	1
12F	Folding Tool	HW8x1/2ZG	Z
18	Divider	BT143G	Е
M2001	Aviation Snip Left Cut	TS1	1
M2002	Aviation Snip Right Cut	HHD1S	1
M2005	Bulldog Aviation Snip	HHD2S	5
M14N	14 in. (362 mm) Alum. Pattern Snip	TY4G	1
A0	1/8 in. (6.35 mm) Scratch Awl	HC1	Н
SH3	Setting Hammer	4MC24	F
T416M	1 in. x 16 ft. Magnetic Tape Measure	RD6	6
W29	Hex Key Set		1

DB1	Dead Blow Hammer
DS2	Offset Duct Stretcher
MSH14	Hex Chuck
MSH516	Hex Chuck
L9M	Torpedo Level
HW8x1/2ZG	Zip-ins 100 pack FREE
BT143G	Bit-Tips 100 pack FREE
TS1	TurboShear
HHD1S	1/4 in. (6.35 mm) Hex Driver Mag.
HHD2S	5/16 in. (7.9 mm) Hex Driver Mag.
TY4G	Tie Tool - Standard Grip
HC1	Hole Cutter
4MC24	Recip Blade 6L 24T
RD6	6-in-1 Reversible Driver
A2	1/4 in. (6.4 mm) Scratch Awl





Tool Bag

Rugged, heavyweight nylon tool bag organizes large and small tools with ample capacity and multiple interior and exterior pockets. Open pockets as well as velcro and zippered entries also accommodate other on-the-job necessities including cell phones and MP3 players! An easy grip, lock-tight web handle and generous padded shoulder strap make this stylishly engineered bag easy to tote and a welcome alternative to heavier steel tool boxes, less durable plastic trays and boxes, or catch-all bucket pouches.

TB1

Rugged	Nylon Tool Bag		
Catalog Number	Description	Nominal Dimensions (L x W x H) in. (cm)	Net Weight lbs. (kg)
TB1	Rugged Nylon Tool Bag	17 x 8 x 8 (43 x 20 x 20)	4.5 (2.04)

Net Weight lbs. (kg)

6.05 (2.74)

Backpack

Seamless, impact-resistant molded polymer base and padded side walls protect tools from drop damage and water damage. • Durable high-thread count 1690D ballistic nylon shell and heavy-duty zippers offer long service life. • 33 duo-colored pockets and pouches plus one wide-opening side and a stand-up backside make it easy to organize and find tools. • Padded and zippered exterior storage for cell phone and laptop/tablet plus two expanding bi-fold side pockets. • Comfortable, wide-padded shoulder straps and back pads help shoulder the load and save neck and back.



33 Pocke	et Backpack	
Catalog		Nominal Dimensions
Number	Description	(L x W x H) in. (cm)
TBP33	33 Pocket Backpack	15 x 7.5 x 20 (38 x 19 x 51)

TURBOSHEAR®










TURN YOUR DRILL OR IMPACT INTO A POWERED SHEAR!





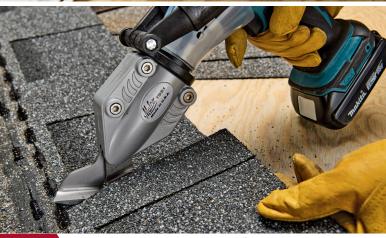





Spiral Duct 20 Gauge

Galvanized Steel 18 Gauge

Mild Steel 18 Gauge .048 (1.22)













Make big or small fabrications on the job with this lightweight and portable tool! The versatile Mini-BrakeTM produces bends up to 135 degrees in sheet metals, including aluminum, copper and 22-gauge galvanized steel. The brake's compact size can accommodate sheet metal stock up to 4-feet wide, in any length, because there is no fixed throat depth to contend with.



Suitable for use anywhere on the job site!


Use the Mini-Brake™ anywhere on the job site, even on a truck tailgate, for a variety of fabricating tasks from large HVAC transitions to narrow roof flashing to structures as small as a 4-inch square. Strengthening ribs on the brake's anvil and apron assure consistent bends. A safety conscious, cam-over style clamping mechanism, similar to much larger shop-floor brakes, keeps the anvil secure in any position. Extra wide feet offer stability even when operating on a truck tailgate. Optional legs are available separately.



A 5/16 in. (7.9 mm) plate steel apron & adjustable strengthening ribs on anvil assure uniform bends across width of material.



Accommodates sheet metal up to 48 in. (1.2 m) wide in any length. There is no fixed throat depth to contend with.



Versatile bending range accommodates compact fabrications as small as a 4-in. (101.6 mm) square.



The Mini-Brake™ also bends metal roofing components and roof flashing including copper and aluminum.



Dual-direction, cam-over style clamps prevents anvil from free falling or creating a pinching hazard.

MB48A

Portable I	Portable Mini-Brake							
Catalog		Minimum Hem Bending Depth	Width	Net Wt.	Height			
Number	Description	in. (mm)	ft. (M)	lbs. (kg)	In. (cm)			
MB48A	Mini-Brake [™] Portable	1/2 (12.7)	4 (1.22)	72 (32.66)	_			
MBL	Mini-Brake [™] Leg Kit	_	_	18 (8.17)	36 (91.44)			
Metal Capa	Metal Capacities							

ivietai Capa	cities						
Material	Aluminum 18 Ga.	Soft Copper 18 Ga.	Zinc 18 Ga.	55% Al-Zn Mild Steel 22 Ga.	Stainless Steel 24 Ga.	Galvanized Steel 22 Ga.	Mild Steel 22 Ga
inches (mm)	.040 (1.02)	.040 (1.02)	.040 (1.02)	.030 (0.76)	.024 (0.61)	.034 (0.86)	.030 (0.76)



Optional Leg Kit (Sold separately).

Pan Style MINI-BRAKE

Perfect for Drip Pans, Register Boxes, and complex corners for Facia!



The MB48B "Pan Style" Mini-Brake™ is designed to fabricate drip pans and register boxes, as well as complex corners for flashing and fascia, on the job. At just under 100 pounds (45 kg), it is carried comfortably by two people, or quickly separated into anvil and table

components for one-person transport. The MB48B operates on a work-bench, tailgate, or optional legs to produce 135° bends in 22-gauge (0.86 mm) galvanized steel at a maximum 48 inch (1.2 m) width. A 5/16-inch (7.9 mm) plate-steel table apron and anvil frame, with adjustable set-back and strengthening ribs, ensures a uniform bend. Cam-over-center clamps keep the anvil secure in any position for safe operation.







Choose a combination of fingers that will span the bending width as closely as possible.


Adding space between fingers when arranging combinations to accommodate fractional or uneven numbered pan or box side-width dimensions will still produce an accurate bend. The anvil's clearance allows for a range of pan or box side-height dimensions from 1/2 inch (12.7 mm) to a maximum of 3 inches (76.2 mm).

MB48B

Pan Style	Mini-Brake						
Catalog Number	Description	Bend Angle	Max Bend Width	Min. Bend Width	Max Pan Height	Min. Pan Height	Min. Flange Net Wt.
MB48B	Pan Style Mini-Brake™	0 - 135°	48 in. (1.2 m)	2 in. (50.8 mm)	3 in. (76.2 mm)	.5 in. (12.7 mm)	99 lbs. (44.9 kg)
MBL	Mini-Brake™ Leg Kit	_	_	_	_	_	_
Metal Ca	pacities						
Material	Aluminum 18 Ga.	Soft Copper 18 Ga	ı. Zinc 18 Ga.	55% Al-	-Zn Mild Steel 22 Ga.	Galvanized Steel 22 Ga.	
inches (mm)	.040 (1.02)	.040 (1.02)	.040 (1.02)	.030 (0	76)	.034 (0.86)	
Replacer	nent Parts						
			Net Weight	lbs. (kg)	Height in. (cm)		
MB48B2	Replacement Finger Plate for	r MB48B 2-in. (50.8	mm) —		_		
MB48B3	Replacement Finger Plate for	r MB48B 3-in. (76.2	mm) —		_		
MB48B4	Replacement Finger Plate for	r MB48B 4-in. (101.	6 mm)				
MBL	Mini-Brake [™] Leg Kit		18 lbs. (8.	17)	36 in. (91.44)		



(Sold separately).

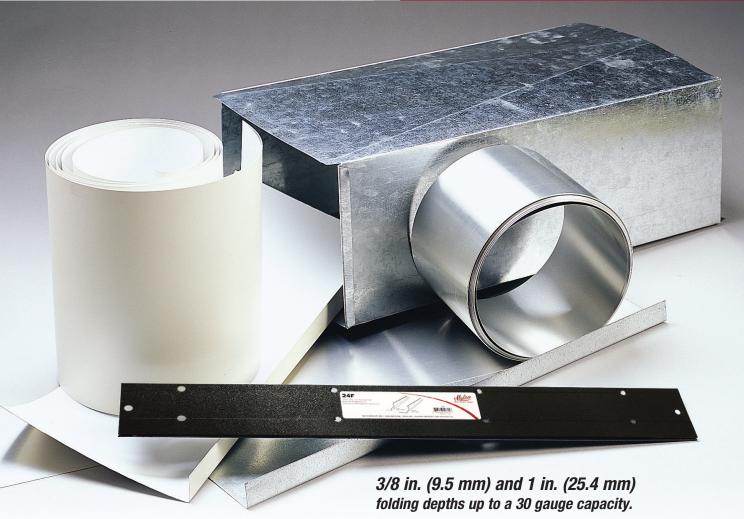

Premium Sheet Metal Folding Tools

Malco's 12F, 18F, and 24F Sheet Metal Folding Tools offer a premium choice for bending and forming metal. Each model is made with superior design and includes handy sight holes to ensure proper depth alignment. Whether you are an HVACR or roofing pro, Malco offers you the right tool to get the job done. Each sheet metal folding tool model can be used for various applications.



12F 12 in. (30.5 mm) Length

The 12F is ideal for HVAC applications such as 3/8 in. (9.5 mm) folds for drive cleats and big 1 in. (25.4 mm) deep folds for joist panning, plenums, register boots, trunk line end caps and more.

Longer 18F - 18 in.

a uniform fold.

(45.7 cm) tool assures



18F 18 in. (45.7 mm) Length



24F 24 in. (60.1 mm) Length

Extra long 24F - 24 in. (60.1 cm) tool may also be used as a mini brake by siding applicators.

Specifications

Folding	Tools			
Catalog Number	Description	Folding Depths in. (mm)	Length in. (cm)	Net Wt. oz. (g)
12F	12 in. Folding Tool	3/8 (9.5), 1 (25.4)	12 (30.5)	20 (425)
18F	18 in. Folding Tool	3/8 (9.5), 1 (25.4)	18 (45.7)	31 (879)
24F	24 in. Folding Tool	3/8 (9.5), 1 (25.4)	24 (60.1)	42 (1191)
Metal Car	nacities			

Material Mild Steel 24 Gauge inches (mm) .024 (0.61)

Did you know?

Malco folding tools are formed from two steel halves, permanently joined together, and handy sight holes assure proper depth alignment.




Specifications

Duct St	tretchers						
Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)				
DS1	Duct Stretcher	16 (406)	12 (340)				
DS2	Offset Duct Stretcher	16 (406)	12 (340)				
DS3	Locking Duct Stretcher	12 (305)	30 (851)				
Replacer	Replacement Parts						
DS1C Rep	lacement wheels, nuts and screws	s (2 each)					

Model DS3 locking duct stretcher pulls duct sections together and holds them in place while freeing both hands to align and install drive cleats.

Greater wheel clearance makes capturing the ends of duct sections, even misshapen flanges, easier than ever. The versatile shape of the DS3 frame also lets you hook and pull duct from above as the drive cleat is coaxed along the remainder of flanged track. The durable all steel frame extends beyond wheel edges, making it safe to push, hammer and bend drive cleats as necessary to complete installation. An offset handle design eliminates knuckle contact with work.



R(티D) Ц

1/8 - 3/16 in. **Hole Punch**

The HP18KR Hole Punch does the work of more expensive, bulkier punches faster and easier!

The Malco HP18KR is designed to make holes along the edge of sheet metal and vinyl plastic, including rivet or screw fastener holes in metal ductwork and vinyl window extrusions. The tool is supplied with a 1/8 in. (3.2 mm) punch and die, pre-installed on the tool, as well as a 3/16 in. (4.8 mm) punch and die assembly. A stop gauge permits tool throat depth adjustments from 1/4 to 1-1/8 inches (6.4 to 28.6 mm) for easy hole placement. The tool body consists of a lightweight, die cast aluminum "C" frame head and hardened steel handles and parts stampings with a rust-resistant, nickel plating to ensure long service life.



- Easily make holes in sheet metal & vinyl plastic.
- Replaceable punch & die installs on the job.
- Adjustable throat depth for easy hole placement.





The tool is supplied with a 1/8 inch (3.2 mm) punch and die, pre-installed on the tool, as well as a 3/16 in. (4.8 mm) punch and die assembly. Punch and die assemblies are also available separately, including

HP18KR

Hole P	unch								
Catalog Number	Description	Punch in. (mm)		le Leverage Rat / Low) througho		Punch / Frame		Length in. (mm)	Net Wt. oz. (g)
HP18KR	Hole Punch	1/8 (3.2) & 3/16 (4.8)	6.7 to	1.0 - 8.4 to 1.0		Tool Steel / Alloy	Steel	9 (229)	16 (454)
Replace	ment Punches	s and Dies		Metal Ca	pacities				
HPD18	1/8 in. Replac	ement Punch & Die Kit for HP	18KR	Material	Galvanized	Steel 24 Gauge	Mild St	teel 22 Gaug	е
HPD316	3/16 in. Repla	cement Punch & Die Kit for H	IP18KR	inches (mm)	.028 (0.71)	up to 2 layers	.024 (0	0.61) up to 2	layers
Replace	ment Part								
5018	Handle Sprin	no Fits All Redline Handled T	nol						



Easily interchange 1/8 in. (3.2 mm) and 3/16 in. (4.8 mm) punches and dies supplied with tool, right on the job-site!


under joists until properly secured.


Duct Holders for Duct and Pipe

Like an extra pair of hands, this job-site duct holder supports sheet metal ductwork in place with clamps and a chain during installation until permanently secured. Temporarily suspending duct or venting from any joist is fast and easy. Double-ended keyhole also allows easy chain adjustment and locking in a horizontal clamping position, required for engineered joists, without the need to tie the chain around the clamp. Formed teeth hold the clamp securely in place on joist.



2DH





for use on engineered wood joists.





Malco's Sheet Metal Hammers are individually hardened and tempered for strength and resiliency. The full-polished heads with beveled face and pein are corrosion resistant, making these tools last longer and work better. The one-piece forged, I-beam construction, make this a durable setting hammer for anyone to use on the job. Available in 12 oz., and 18 oz.

Specifications

Duct Ripper

Catalog Number	Description	Head Weight oz. (g)	Head Length in. (mm)	Face Size in. (mm)	O/A Length in. (mm)	Net Weight oz. (g)
SH3	Setting Hammer Leather Gripped	18 (510)	5-1/2 (140)	7/8 (22.2)	11-3/4 (298)	18 (510)
SH3V	Setting Hammer Vinyl Gripped	18 (510)	5-1/2 (140)	7/8 (22.2)	11-3/4 (298)	18 (510)
RH4	Riveting Hammer Leather Gripped	12 (340)	4-7/8 (124)	3/4 (19.1)	11 (279)	12 (340)
RH4V	Riveting Hammer Vinyl Gripped	12 (340)	4-7/8 (124)	3/4 (19.1)	11 (279)	12 (340)
DB1	Dead Blow Hammer	17 (482)	3-1/2 (89)	1-1/4 (32)	11 (279)	16 (454)
Duct Ri	ipper					
Catalog Number	Description				Nominal Length in. (mm)	Net Weight oz. (g)



9-1/2 (241)

5 (147)

Pocket Sized Sheet Metal Scribe



Scribe common place trim lines on galvanized sheet metal quickly and accurately. Ten pre-set scribing depths from 1/8 in. to 1 in. (3 to 25 mm). Each scribing depth size features a dual edged point to create clean, readable and accurate score lines parallel to the edge of the metal sheet. Corrosion resistant finish and etched-in dimensions are readable for life of tool.

Adjustable Sheet Metal Scribe



Measure, mark, and scribe trim lines on sheet metal in one easy operation. Set desired trim depth on the 1/8 in. (3.2 mm) graduated scriber extension and tighten knob. The stop at the end of the scriber sleeve glides along edge of work as a 6 x 3/8 in. sheet metal screw point scribes a clean, hard line. Adjustable from 1/4 to 12-1/2 in. (6.4 to 318 mm) depths.

Expandable Trammel Points



Two sizes handle a variety of layout applications. The TR42 expands to a big 42 in. (107 cm) radius (84 in. diameter). The compact TR18 expands to 18 in. (46 cm) and stores in most tool boxes. All steel construction. Points are resharpenable and also replaceable. Telescoping arms are nickel plated to resist corrosion. Handle features a comfortable vinyl grip.



Solid carbide tip for scribing fine lines on hardened steel as well as glass, ceramics, plastics or sheet metal. Retractable tip is easily replaceable. Tool has handy pocket clip. Carbide tip ensures long service.



Accurate and fast adjusting. Two sizes for circles up to 32 in. (81 cm) and 42 in. (107 cm). Points are easily resharpened or replaced. Nickel plated steel body.





Use to scribe lines on metal, plastic, and a variety of other materials. Pierce holes in wood, plastic, leather - even light gauge metal. Blades are high carbon, alloy tool steel fully polished to resist rust. Blade tapers to a fine point and may be resharpened many times. Easy-to-spot red handles are shock and shatter resistant.

_								
Scribes	;							
Catalog Number	Description	Radius Min. in. (mm)	Radius Mai	x. O/A Storage in. (cm)	Length Min. / Max. Adjustments in. (mm)	Length in. (cm)	Net Wt. oz. (g)	Replacement Parts
A40	Scribing Depths in. (mm) 1/8, 3/16, 1/4, 5/16, 3/8,1/2, 5/8, 3/4, 7/8, 1	(3.2, 4.8, 6.4, 9.5, 1	— 2.7, 15.9, 19.1	 , 22.2, 25.4)	-	_	_	_
A50	Carbide Tip w/ retractable point	_	_	_	<u> </u>	_	10 (284)	A50R
A60	Adjustable Sheet Metal Scriber		_		1/4 to 12-1/2 (6.4 to 318)	_	10 (284)	12027
#18	Divider Max. diameter circle 32 (81 cm)		_			11 (28)	7 (199)	RP2 / 10018 / DIVRK
#24	Divider Max. diameter circle 42 (107 cm)	_	_	_	_	13-1/2 (34)	9 (255)	RP2 / 10018 / DIVRK
Tramm	el Points							
TR18	Trammel Point 18 in.	7 (18)	18 (46)	12 (31)		_	4 (113)	TRP
TR42	Trammel Point 42 in.	12 (30)	42 (107)	24 (61)	_	_	7 (199)	TRP
Scratci	h Awis							
Catalog Number	Description	Nominal Bladed in. (mm)	Diameter	Blade Length in. (mm)	Overall Length in. (mm)			
<u>A0</u>	Regular Grip Handle Scratch Awl	1/8 (3.2)		3.11 (76)	6-1/4 (159)			
A20	Regular Grip Handle Scratch Awl	1/4 (6.4)		4 (102)	8 (203)			
A3	Large Grip Handle Scratch Awl	5/16 (7.9)		3.5 (89)	5.75 (146)			
A2	Large Grip Handle Scratch Awl	1/4 (6.4)		4 (102)	6-1/4 (159)			

DampersHardware and Components



Malco 28 Gauge Dampers feature 1/4 in. (6.4 mm) bearings allowing bearing holes to be made in round duct with the use of a scratch awl. Squeeze pipe so that it is oval shaped. Insert damper into pre-punched bearing hole(s). Pipe will spring back to round when released. Secure with wing nut(s) provided. Available with or without handles.

Damper Regulator Hardware



Single Bearing / Spring Loaded:

1-spring bearing / 1-inside washer / 1-handle / 1-wing nut



Double Bearing:

2-spring bearing / 1-inside washer / 1-handle / 1-wing nut



Double Bearing:

1-spring bearing / 1-fixed tip / 1-inside washer / 1-handle / 1-wing nut

Bulk Components





H1100 (100 pack) Damper Handles



Fast, easy to use and lightweight.
Handy lock makes tool pocket sized.
Rust-resistent, zinc plated steel construction
with vinyl cushioned grips.


Didyouknow?

Popular Redline Crimpers can be found on page 45.



Damp	ers / Hardware	& Components							
Catalog Number	UNASSE	MBLED	Pipe Diameter in. (mm)		Bearing	Catalog Number	PREASSEMBLED	Pipe Diameter in. (mm)	Bearing
Standard	Dampers, including V	ingnuts 28 Gauge (0.48 r	nm) 100 packs			Standard Dar	npers, including Wingnuts 28 Gauge	e (0.48 mm) 100 packs	
D5100 (n	o handle)		5 (127)		single	D4AST (inclu	des handle)	4 (102)	single
D6100 (n	o handle)		6 (152)		single	D5AST (inclu	des handle)	5 (127)	single
D6HT100	(no handle)		6 (152)		double	D6AST (inclu	des handle)	6 (152)	single
D7HT100	(no handle)		7 (178)		double	D7AST (inclu	des handle)	7 (178)	single
D8HT100	(no handle)		8 (203)		double	D8AST (inclu	des handle)	8 (203)	single
Crimp	er 1-Blade					D6HTAST (inc	cludes handle)	6 (152)	double
Catalog	o <u>D</u>	·		Length	Net Wt.	D7HTAST (inc	cludes handle)	7 (178)	double
Number	Description	Throat Depth in. (mm)	Jaws	in. (mm)	oz. (g)	D8HTAST (inc	ludes handle)	8 (203)	double
901	1-Blade Crimper	1_1// (21.9)	Carbon Stool	8 (303)	Ω (227)			·	

Capacitie	s					
Material	Aluminum	Copper	Stainless Stee	el 26 Ga.	Galvanized Steel 24 Ga.	Mild Steel 24 Ga.
inches (mm)	.035 (0.89)	.023 (0.58)	.018 (0.46)	.028 (0.71)	.024 (0.61)	





PEX Foam Board Stapler

For in-floor radiant heating installation. Magazine Fed Staples with Non-Jamming Design!

Malco's FBSN Pex Foam Board Stapler is the ideal solution for installing in-floor radiant heating. A light-weight one-piece polymer magazine stands up to any rugged job-site environment. A leaf spring controlled stop automatically adjusts to setup the staples and guide it through the fastening mechanism without risk of jamming or deforming staples. Magazine loading-strips of 25 staples are joined together with a discreet plastic weld that allows staples to separate cleanly as they are engaged by the fastening mechanism.

Exclusive Dual-Barbed foam board staples increase bite and holding power!

FBSN1: 1-1/2 in. (38.1 mm) staples for 1 in. (25.4 mm) foam board, for 3/8 in. (9.5 mm), 1/2 in. (12.7 mm) PEX.

FBSN2: 2-1/2 in. (63.5 mm) staples for 2 in. (50.8 mm) foam board, for 3/8 in. (9.5 mm), 1/2 in. (12.7 mm), 5/8 in. (15.9 mm) PEX.

Didyou Know?

Your Foamboard Stapler can be converted for use on PEX to Wood!



PWSK1

Wooden sub-floor kit includes weight cylinder and easy instructions. FBSN
Slide Weight for Easy Feeding

Non-Jamming Design

Retractable Wire-Form Stand

ERGN

FES					
PEX Fo	pamboard Stapler	PEX to Wood Conversion Weight Kit			
Catalog Number	Description	Stapler Size in. (mm)	Staple Size in. (mm)	Catalog Number	Description
FBSN	PEX to Foam board Stapler	37 x 11-1/4 x 2	2-1/2 in. (940 x 286 x 64)	PWSK1	Conversion Kit for Original FBS/FBSN Stapler
PEX St	aples			Replace	ement Parts
FBSN1	1-1/2 in. (38.1 mm) staple for 1 in. (25.4 mm) foam board (200 qty.)	_	1-1/2 (38.1)	FBSNS	FBSN / PWS1 wire-form stand *
FBSN2	2-1/2 in. (63.5 mm) staple for 2 in. (50.8 mm) foam board (200 qty.)	_	2-1/2 (63.5)	FBSNW	Magazine Slide Weight **
FBS1BX	1-1/2 in. (38.1 mm) box of staples for 1 in. (25.4 mm) foam board (300 qty.)	_	1-1/2 (38.1)	* Will wo	rk with black magazine slide only.
FBS2BX	2-1/2 in. (63.5 mm) box of staples for 2 in. (50.8 mm) foam board (300 qty.)	_	2-1/2 (63.5)	** Will w	ork with any model, including original FBS



For sub-floor radiant heating installation. Includes Magazine Slide Weight and Retractable Stand!

The Malco PWS1 Pex Stapler for Wood and Foam Board is the perfect tool for installing in-floor radiant heating. This easy-loading and portable manual stapler includes a magazine feed and operates from a standing position to quickly secure a layout of PEX pipe to a wooden sub-floor or foam board base.

PEX to Wood Staples

PEX to Wood staples feature two .083 x 3/4-in. ring-shank stainless steel nails for superior pull strength in a wooden sub-floor.

PWS2: 1-1/16 in. (27 mm) staples to secure 3/8 in. or 1/2 in. (9.5 or 12.7 mm) PEX layouts to a 3/4 in. (19.1 mm) wooden sub-floor.

PWS1

Catalog	-	Stapler Size	Staple Size
Number	Description	in. (mm)	in. (mm)
PWS1	PEX to Wood Stapler	37 x 11-1/4 x 2-1/2 in. (940 x 286 x 64)	
PEX to	Wood Staples		
PWS2	PEX to Wood Staples (for use in plywood only)	_	1-1/16 (27)
Replac	cement Parts		
FBSNW	Magazine Slide Weight		
FBSNS	FBSN / PWS1 wire-form stand - Will work with	black magazine slide only.	
FBSNW	Magazine Slide Weight - Will work with any m	nodel, including original FBS	

Did you Know?

Non-Jamming Design

The PWS1 Pex to Wood Stapler can use Foamboard Staples too!

Slide Weight for Easy Feeding

Retractable Wire-Form Stand

SmartTool[™]

with SmartClip™Fasteners

For Fast, uniform layout of PEX to a wire-grid!

The SmartTool™ stapler is used to install SmartClip™ staples that secure an in-floor radiant heating layout of PEX tubing to a wire grid with foam board base. The ergonomic 38-1/2 inch (98 cm) tall SmartTool™ weighs only 6.1 lbs (2.8 kg) and saves time by operating from a standing position to attach SmartClips™ to a 10-ga (3.5 mm) wire grid. The installed SmartClips™ accommodate popular 1/2 inch PEX tubing, which the user also installs from a standing position by pressing into place with one foot while distributing the PEX along the clip layout. The SmartClip™ keeps the inserted PEX elevated over the wire grid to provide thorough concrete encasement and coverage.



Easy top-loading.



Stand Comfortably



Secure wire connection



Protective plastic-to-plastic PEX connections.



Uniform layout ensures even radiant heating surface.



SM2SmartClip



SpecificationsSmartTool™

Catalog Number	Description	Tool Length in. (cm)	Handle Width in. (cm)	Wire Capacity Ga. (mm)	SmartTool Clip Maximum	PEX Capacity in. (mm)	Tool Net Weight lbs. (kg)	Quantity
SM1	SmartTool™	38.5 (98)	21 (53)	_	2 Strips of 20 Clips	_	6.1 (2.78)	1
SmartClip	тм							
SM2	SmartClip™	_	_	10 (3.5)	_	.5 (12.7)	_	1280



Organize and dispense PEX tubing easily and efficiently with Malco's PEX Tubing Uncoiler. A heavy-duty turntable supports a full coil of PEX (polyethylene cross-linked tubing). An eyelet loop opens for easy feeding or removal of tubing from the uncoiler unit. The rotating eyelet arm allows tubing to be pulled off in any direction. A Factory-adjusted tension prevents backlash and spreading of tubing coil off the turntable. The PEX Tubing Uncoiler is easy to setup, with no tools required to assemble, and takes up very little space in a truck or van. The entire unit stores in a steel-reinforced plastic case measuring 40 x 17 x 5 in. (102 x 43 x 13 cm). Carrying weight is only 50 lbs. (22.7 kg).

EASY STEP BY STEP ASSEMBLY



UC1

PEX Un	coiler	
Catalog		Net Wt.
Number	Description	lbs. (kg)
UC1	Pex Tubing Uncoiler in Case	50 (22.7)



PEX-to-Wire Tool

The lowest cost per connection for laying out a PEX in-floor radiant heating system on a wire grid.

- · Safe to use on all PEX to wire applications and all brands of PEX tubing from 3/8 in. (9 mm) to 5/8 in. (15.9 mm) diameters.
- Easy-loading magazine with 25 clip capacity won't slow you down.
- Trouble-free tool operation and secure clip connection.
- 12-gauge (2.5 mm) clips will not jam, break, or damage PEX.
- Clip connection allows some PEX movement to avoid abrasion.

EASY STEP BY STEP LOADING










25 PEX to Wire Clips

Pex-to-	Wire Tool				
Catalog Number PT1	Description PEX to Wire Tool	Clip Usage PC1		Length in. (mm) 10-3/8 (264)	Net Wt. oz. (g) 28 (794)
Pex-to-	Wire Clips				
Catalog Number	Crown in. (mm)	Opening in. (mm)	Inside Diameter in. (mm)	Thickness Ga. (mm)	Package Qty.
PC1 EV	1-7/8 (48)	15/16 (25)	15/16 (25)	12 (2.5)	500





Hard or Soft Copper





Rugged Aluminum Alloy Body

For hard or soft copper tubing. Makes clean, right-angle cuts with no burrs or chips to clog tubing. Features ball bearing feed, flare cut-off groove, retractable reamer and spare cutting wheel. Rugged aluminum alloy body is designed for handling ease.

Conforms to Federal Specification GGG-C771d 1-31-64. Type II, Class 1, Style B. Conforms to Federal Specification GGG-C771d 1-31-64. Type II, Class 2, Amendment II.

Tight Spaces



1-1/4 in. Clearance for tight spaces

A handy tube cutter for cramped spaces so often encountered on installations or repairs. Only 1-11/16 x 1-15/16 x 7/8 in. (42.9 x 49.2 x 22.2 mm). Weighs only 2-1/2 oz. (71 g) A mere 1-1/4 in. (31.8 mm) clearance is all that is needed to operate the "Imp".

Double Rollers



Tubing pivots on double rollers.

Compact cutter requires only 1-15/16 in. clearance, vet accommodates tubing from 1/8 to 1-1/8 in. (9.5 to 28.6 mm) 0.D. (1/4 to 1 in. Nominal). Cuts copper, aluminum or brass, thin wall tubing. Lightweight aluminum alloy body. Spare cutter wheel included with tool.

Sure Grip Tube



Ideal for use on PEX Tubing

Also produces cuts in ABS, PVC, rubber and fabric reinforced hose up to 1-1/4 in. (31.8 mm) O.D. Rigid, durable nylon handle design provides sufficient leverage when cutting so that only moderate hand pressure is required. Stainless steel cutting blade is resharpenable and replaceable.


Spe	Cilications	
Tube Cu	ıtters	
Catalog Number	Description	Tubing Outside Diameter in. (mm)
TC127	Tube Cutter	1/8 to 5/8 (3.2 to 15.9)
TC174	Tube Cutter	1/8 to 1-1/8 (9.5 to 28.6)
TC312	Tube Cutter	1/4 to 1-5/8 (6.4 to 41.3)
TC274	Tube Cutter	1/8 to 1-1/8 (3.2 to 28.6)
TC400	Sure Grip Tube Slicer	_
Replace	ment Parts	
Catalog Number	Description	Tube Cutters
RW127	Cutting Wheel	TC127 / TC174
127TCS	Cutting Wheel Screw	TC127 / TC174
RW274	Cutting Wheel	TC312 & TC274
274TCS	Cutting Wheel Screw	TC312 & TC274
RB400	Replacement Blade	TC400
75046	Cutting Wheel for Stainless	TC312 & TC274



Drip Edge Folding Tools

For quick bends in standing seam metal roofing panels

A fiberglass reinforced nylon handle makes bending maximum 22-ga. (0.76 mm) roofing metal easy, even when working overhead.

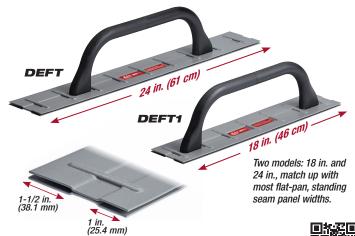

Specifications

Drip E	Drip Edge Folding Tools							
Catalog		Bending Depth	Length	Net Wt.				
Number	Description	in. (mm)	in. (cm)	lbs. (kg)				
DEFT	24 in. Drip Edge Folding Tool	1.5 (38.1) and 1 (25.4)	24 (61)	3.60 (1.63)				
DEFT1	18 in. Drip Edge Folding Tool	1.5 (38.1) and 1 (25.4)	18 (46)	3.24 (1.47)				



Seamer & Tongs

Straight or Offset, for the way you work!

The Malco Seamer & Tongs line features generous throat depths and openings to handle a broad range of bending and seaming applications. Durable all-cast-steel construction with heavy-duty pivot point ensures long service life. Comfortable vinyl cushioned grips facilitate easier one-hand operation.



Seame	r and Tongs				
Catalog Number	Description	Throat Depth in. (mm)	Jaw Width in. (mm)	Length in. (mm)	Net Wt. oz. (g)
S10	Seamer & Tongs, Straight	1-1/2 (38)	3.5 (89)	9.25 (235)	46 (1,304)
SG10	Seamer & Tongs, Straight, Gripped Jaws	1-1/2 (38)	3.5 (89)	9.25 (235)	47 (1,332)
S11	Seamer & Tongs, Offset	1-1/2 (38)	3.5 (89)	9.5 (241)	46 (1,304)
SG11	Seamer & Tongs, Offset, Gripped Jaws	1-1/2 (38)	3.5 (89)	9.5 (241)	47 (1,332)



3-Station Edge Roller

Assures a uniform bend along the entire length of material. Quickly adjusts for making 5/8 to 4 in. (15.9 -102 mm) bends in 29-22 gauge (0.34 - 0.76 mm) steel.





ER3

3-Station Edge Roller						
Catalog Number	Description	Bending Depth in. (mm)	Net Wt. Ibs. (kg)			
ER3	3-Station Edge Roller	5/8 - 4 (15.9-102)	8.5 (3.86)			
Capacitie	s					
Material	Mild Steel 29-22 Ga.					
inches (mm)	.0135029 (0.34 - 0.76)					



Standing Seam Metal Roofing



Metal Building Panels

Metal Cutting Saw Blade

Cool Clean Cuts in metal roofing & metal building panels



MCCB7

Tough C-6 Carbide Tipped

Tough C-6 carbide tipped blade fits all popular brands of portable circular saws. Lasts up to 30 times longer than abrasive disks for cutting unhardened ferrous metal.

Makes true, flat cuts in standing seam metal roofing and metal building panels without burning paint or protective coatings. Also makes clean cuts in metal studs, light angle iron, and thin walled pipe.






MCCB7

Metal Cutting Saw Blade						
Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)	
MCCB7	Metal Cutting Saw Blade	7-1/4 (184)	5800	56	5/8 (16)	
Capacitie		, . (10.)			5.5 (15)	
Material	Mild Steel 16 Ga.					
inches (mm)	050 (1.52)					

Metal Benders

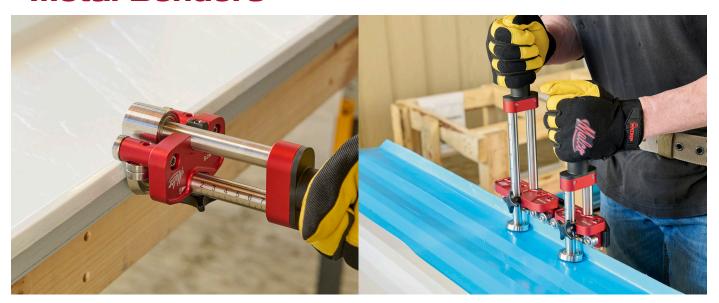

Light, Versatile, and Modular!

Professional-grade Metal Benders form 0°-100° bends on straight or curved panels of any length on the jobsite. Narrow bearing stance models follow curved panels easily or form straight bends when needed. Wide bearing stance models provide more control for straighter bends. Both variations may be paired with a connector for a modular experience, allowing trade pros to customize their set-up, in a one or two station configuration. Visit our website for more indepth product information and videos.





Adjustable roller spacing accommodates a wide range of materials:

- Roller spacing adjustable from .5mm 1 mm
- Capacity of materials: 24 ga steel, 26 ga. stainless steel, .040 aluminum

Metal	Metal Benders					
Catalog Number	Description	Bend Depth	Bend Range	Bend Radius	Material Thickness	
FS1N75	Bender, Single Station, 75mm (Narrow)	3/16" - 3" (5mm - 75mm)	0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)	
FS1N165	Bender, Single Station, 165mm (Narrow)	3/16" - 6 1/2" (5mm - 165mm)	0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)	
FS1W165	Bender, Single Station, 165mm (Wide)	3/16" - 6 1/2" (5mm - 165mm)	0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)	
FS1W215	Bender, Single Station, 215mm (Wide)	3/16" - 8 1/2" (5mm - 215mm)	0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)	
FS1W365	Bender, Single Station, 365mm (Wide)	3/16" - 14 3/8" (5mm - 365mm)	0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)	
FSH2	Handle	_	_	_	_	
FSC1	Bender Connector	_	_	_	_	
FSLR	Large Radius Accessory	_	0° to 100°	.080" (2 mm)	_	
FSBAG	Bender, Bag	_	_	_	_	

Metal Benders



- Create 0°-100° bends in any panel length.
- Included handle is large to distribute load across the palm of your hand, and adds leverage for all day comfort.
- Handle may be removed to fit bender in confined spaces.
- Laser engraved bend depth in Inches and CM for quick setup.
- Adjustable roller spacing allows trade pro's to eliminate variations in pressure and bend quality due to material thickness.
- Aluminum and stainless steel components resist corrosion.
- Premium CNC components built tough.





(used for copper bending)



FSBAG2

_					
Metal Benders					
Catalog Number	Description	Bend Depth	Bend Range	Bend Radius	Material Thickness
FS2F150	Bender, Dual Station, 150mm	3/16" - 5-7/8" (5mm - 150mm	o° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)
FS2F200	Bender, Dual Station, 200mm	3/16" - 7-7/8" (5mm - 200mm	o° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)
FS2F350	Bender, Dual Station, 350mm	3/16" - 13-3/4" (5mm - 350mr	m) 0° to 100°	.027" (0.7 mm)	Adjustable .020"040" (0.5 - 1 mm)
FSLR2	Bender Roller Set 2mm	_	0° to 100°	.080" (2mm)	_
FSBAG2	Bender Bag, Large	_	_	_	_

Metal Disc Benders











- Form 90° 180° bends to create hems and other details in any panel length.
- 1 station allows for straight or curved bends. 2 station for straight bends.
- Bearing guides glide smoothly to follow initial bend.
- Removable discs for quick disassembly and mid panel tool removal.
- Alumminum and stainless steel components resist corrosion.
- Premium CNC components built tough.
- Pair with FSH1 to create designs and bend start lines in thin sheetmetal.



FSH₁



Metal Benders					
Catalog Number	Description	Bend Depth	Bend Range	Bend Radius	Material Thickness
FS1DS	Bender, Disc, Small	5/16" - 1-3/16" (8mm - 30mm)	90° to 180°	.125" (3 mm)	Maximum .032" (0.8mm)
FS2DS	Bender, Disc, Double, Small	5/16" - 1-3/16" (8mm - 30mm)	90° to 180°	.125" (3 mm)	Maximum .032" (0.8mm)
FS1DL	Bender, Disc, Large	5/16" - 1-3/4" (8mm - 45mm)	90° to 180°	.125" (3 mm)	Maximum .032" (0.8mm)
FS2DL	Bender, Disc, Double, Large	5/16" - 1-3/4" (8mm - 45mm)	90° to 180°	.125" (3 mm)	Maximum .032" (0.8mm)
FSH1	Bender, Handle, Disc	_	_	_	_

Standing Seam Seamer

FSXS

The FSXS SEAMER mechanically seams 1" and 1.5" vertical standing seam panels.





FSXS2

The FSXS2 SEAMER mechanically seams 2" vertical standing seam panels.





FSXSRPDW Replacement Drive Wheels

Comes packaged in a premium IP 67 case with custom foam inserts to ensure the safe

storage of your seamer

REMOTE TRIGGER INCLUDED.



Specifications

Stand	ding Seam Seamer				
Catalog		Profile	Steel	Aluminum	Copper
Number	Description	Size in. (mm)	Capacity	Capacity (mm)	Capacity (cm)
FSXS	Standing Seam Seamer, 1.5"	1"-1 1/2" Single & Double Lock (25mm-38mm)	24 ga.	.040" (1 mm)	20 oz. (591 cm)
FSXS2	Standing Seam Seamer, 2"	2" Single & Double Lock (50.8mm)	24 ga.	.040" (1 mm)	20 oz. (591 cm)
Repla	acement Parts				

Galaiog	
Number	Description
FSXSRPDW	Replacement Drive Wheels FSXS
FSXS2RPDW	Replacement Drive Wheels FSXS2

Hand Seamers

Anti-Scratch & Anti-Slip for standing seam panels! Malco's new Mechanical Lock Hand Seamers are the perfect addition to any job site. Pairing with Malco's power assisted seamer these new hand tools easily create flawless seams. The replaceable PVC inserts prevent scratching on the painted panels for an excellent finished look. Additionally, rubber grommets will prevent tool slippage during seam closing.



FSHS

Works on 1" or 1.5" vertical seams with ½" width





FSHS2 Works on 2" vertical seams with 13/16" width

HAND SEAMER FEATURES:

• Designed for seaming both the first 90 degree stand and second 180 degree stage on mechanical lock panels • Replaceable PVC inserts prevent scratching • Rubber grommets improve grip and prevent slipping • Ergonomic handles • Carry lock clip for easy carrying and transport

Hand	Seamer						
Catalog Number	Description	Profile Size in. (mm)	Steel Capacity	Aluminum Capacity (mm)	Copper Capacity	Zinc (mm)	Stainless Steel
FSHS	Standing Seam Seamer, 1.5"	1"-1.5" Single & Double Lock (25mm-38mm)	22 ga.	.040" (1 mm)	20 oz.	.040" (1 mm)	26 ga.
FSHS2	Standing Seam Seamer, 2"	2" Single & Double Lock (50.8mm)	22 ga.	.040" (1 mm)	20 oz.	.040" (1 mm)	26 ga.



_							
Standing Seam Metal Cutter							
Catalog Number	Description	Profile Size in. (mm)	Steel Capacity	Aluminum Capacity (mm)	Copper Capacity (cm)		
FSXC	Standing Seam Cutter, 1.5"	1"-1 1/2" Single & Double Lock (25mm-38mm)	24 ga.	.040" (1 mm)	20 oz. (591 cm)		
FSXC2	Standing Seam Cutter, 2"	2" Single & Double Lock (50.8mm)	22 ga.	.040" (1 mm)	20 oz. (591 cm)		
Replac	cement Parts						
Catalog							
Number	Description						
FSXCRPC	Replacement Cutting Disc Set for FSXC						
FSXCRPC2	Replacement Cutting Disc Set f	or FSXC2					

Progressive Profiling Bender Set

SEE IT IN ACTION!





NEW PRODUCT!



- Effortlessly forms male/female profiles for 1.5" mechanical roof panels
- Easy to use and simple to adjust
- Additional rollers included to adjust and adapt to varying material thickness
- Boost job site efficiency and reduce spend on rental profiling tools

Star	nding Seam Seamer						
Catalog		Profile	Steel	Aluminum	Copper	Stainless	
Number	Description	Size in.	Capacity	Capacity (mm)	Capacity (cm)	Steel	Zinc
FSP1	Progressive Profiling Bender Set, 1.5"	1.5" Male & Female Profiles	24 ga.	.040" (1 mm)	20 oz. (591 cm)	26 ga.	.040" (1 mm)



Stone Coated Steel Roofing Cutter 30% Easier!

Makes fast, safe, precise cuts in stone coated steel shingles, shakes and tile style roofing, including DECRA, METRO and GERARD brands up to 30% easier than other guillotines.

Compound leverage and a generous handle length reduce user cutting force up to 30% versus other guillotine style cutters that pose a challenge to even the most seasoned pros. A large table surface allows sure handed control and prevents damage to the work-piece. The table's "feed-thru" design also allows long angle cuts for roof hips and valleys. The steel shingle, including lock seam, is cut in an easy, steady motion. The shearing action has a "wiping" effect on the shingle's zinc coating that seals cut edge to resist rust.



Stone Coated Steel Roofing Cutter					
Catalog Number	Description	Adjustable Table Heights in. (cm)	Net Wt. Ibs. (kg)		
SCSRC1	Natural Roofing Slate Punch	21.25 - 29.25 (540 -743)	70 (32)		
Replacement Part					
SCSRC1RB	Replacement Blade and Die Set				



Reversible Cutting Edges on hardened steel blade and die offer twice the cutting life, prior to sharpening. Blade and die are also easily replaceable!





After securing the blade lock-pin in place, the SRCSC1 stone coated roofing cutter is safe to carry on to the job site.



Sturdy frame with two different length leg tubes provides working table height options of 21-1/4 or 29-1/4 inches.

Gutter Outlet Punch

For cutting downspout drop holes in K-style aluminum gutter, nothing else matches the speed and accuracy of the Malco Gutter Outlet Punch System.

The Malco Gutter Outlet Punch and Dies make clean, accurate hole cuts in .032 in. (0.81 mm) aluminum gutter. Ample throat clearance allows these lightweight outlet punches to work over the front edge of gutter to quickly line up cuts. Convenient fastener holes are provided in the tool frame base for optional bench mount application. An easy ratcheting mechanism and angled punch-blade provide smooth cutting action. High carbon steel blades on punches ensure long service life and are also easily replaceable. Heat treated components and weather resistant finishes provide added tool strength and durability.



- Ejector built into Tool Frame safely removes metal slug from rectangular cuts.
- Punch blades are easily replaceable.
- Extra holes in base of Tool Frame allow for secure bench-mount operation.

A versatile, lightweight Malco Tool Frame accepts your choice of separate Malco rectangular and X-style punch and die combinations, including a 3 x 4 in. (76 x 102 mm) X-style punch and die.



GOP23UK GOP34UK

GOT

Catalog Number	Description	Frame Dimensions in. (cm.)	Net Wt. lbs. (kg)
GOT	Tool Frame	19 x 10 (48 x 25)	6.70 (3.04)
Punch and	d Die Assemblies		
	2 x 3 in. (51 x 76 mm) Standard Rectangular Hole	_	_
GOP23UK	Punch and Die Assy - Upgrade Kit	_	2.20 (1.00)
	3 x 4 in. (76 x 102 mm) Standard Rectangular Hole	_	_
GOP34UK	Punch and Die Assy - Upgrade Kit	_	2.50 (1.13)
	2 x 3 in. (51 x 76 mm) X-Style	_	_
GOP23XUK	Punch and Die Assy - Upgrade Kit	_	1.90 (0.86)
	3 x 4 in. (76 x 102 mm) X-Style	_	_
GOP34XUK	Punch and Die Assy - Upgrade Kit	_	2.50 (1.13)
Replacemen	nt Blocks and Chocks		
GOTRC	Replacement Chocks for (GOT)	_	_
GOPRB	Replacement Blade for (GOP23UK)	_	1.30 (0.60)
GOP23XRB	Replacement Blade for (GOP23XUK)	_	_
GOP34XRB	Replacement Blade for (GOP34XUK)	_	2.34 (1.06)
Replacemen	nt Part		
GOTRK	Replacement Spring		





3 x 4, 3 x 4 X-Style 3 x 4, 3 x 4 X-Style

5K Gutter -

6K Gutter -

GUTTER TOOLS




Gutter Screw Guide

Extra-Long 6-in. Magnetic Screw Guide

This Extra-Long Screw Guide works over the outside edge of rain gutter to hold and guide 1/4 in. hex head screws up to 3-3/4 inches long. An impact grade 6-inch long driver, with a 4-1/2 in. anodized aluminum sleeve, provides easy reach to the mounting surface of eaves without scuffing the outside gutter edge. Fits any drill or 1/4-inch impact driver and features a secure spring loaded magnet.

GSG6

Gutte	r Screw Guiae					
Catalog		Driver Length	Hex Shank	Hex Opening	Length Of Sleeve	Weight
Number	Description	in. (mm)	In.	In.	in. (mm)	oz. (g)
GSG6	Gutter Screw Guide	6 (152)	1/4	1/4	4-1/2 (114)	3.60 (102)



Gutter Nail Driver

Works anywhere to attach gutter to fascia with ease.

Use with hidden hangers and 8D galvanized nails to hang aluminum or steel gutters. A non-slip ergonomic grip provides multiple positions for grasping tool and working. Durable two piece steel construction plus weather resistant zinc and nickel plating assure long service life of this professional quality tool.

GND

Gutter	Nail Driver		
Catalog		Length	Net Wt.
Number	Description	in. (mm)	oz. (g)
GND	Gutter Nail Driver	7-5/8 (194)	7 (199)

Trim Nail Punches

Drive trim nails into soffit, fascia, and other finishing trim without denting or marring material.

The TNP2S, Heavy Duty Trim Nail Punch features an all-steel nose and aluminum tail piece that directs weight to the working end when grasping or starting a nail. Accommodates up to 1-1/4 in. (31.2 mm) standard trim nails. Nose fits into 1/2 in. (12.7 mm) J-channel.

The TNP2R, Trim Nail Punch with Retaining Clip, offers easier nailing from any angle or height and has an exclusive, "nail retaining clip" feature. Avoid the awkwardness and strain of balancing nails in the nose of the punch or holding back the drive pin while standing on a ladder or reaching out to nail. The new retaining clip also minimizes scrapes and dents caused by nail slippage or improper setting depth.

The TNP3S, Pocket Sized Trim Nail Punch, is constructed of hardened steel and corrosion resistance to ensure longer tool life. The tool will hold and install standard 1-1/4 in. (31.2 mm) trim nails. The small size allows easy access to recesses of formed trim pieces. A hex collar prevents rolling when tool is set down.

Trim Nail Punches						
Catalog		Tool Length.	Net Wt.			
Number	Description	in. (mm.)	oz. (g)			
TNP2S	Trim Nail Punch	6-3/4 (171)	6 (170)			
TNP2R	Trim Nail Punch with Clip	6-3/4 (171)	6 (170)			
TNP3S	Trim Nail Punch	5 (127)	2 (57)			
TNP3SB	Trim Nail Punch Bulk (24)	_	_			
TNP3SH	Trim Nail Punch Bulk (100)	_	_			
Replacen	nent Part					
TNP2CL	Replacement Clip for TNP2R					







The Malco model SL2R Adjustable Snap Lock Punch can be used as a gutter end cap crimper or for use in creating locking tabs in light sheet metals. A slide adjustment for throat depth allows settings from 1/4 to 5/8 inch (6 to 16 mm) depth. The formed metal cutting jaws and handles are made of hardened stampings. Rust resistant nickel plate and black oxide finishes ensure long service life. Easy one-hand operation make this a versatile tool for the job at hand.





If you are looking for a tool that efficiently downsizes the corners of aluminum or steel downspout, then the Malco 5 Blade Gutter Downspout Crimper is the tool you are looking for. The 5 blade design produces 1-1/4 inch (31.75 mm) long double crimps without causing deformation of downspout walls. A factory-like crimp ensures the downspout walls stay square for a tight fitting, leak-proof connection. A handle closing stop helps to maintain a consistent crimp profile. Made with hardened all-steel construction and a nickel chrome finish, you can be assured this tool will last a long time.

SC2



Light duty tool. Makes a single crimp for downsizing aluminum downspouts.

SC2

1 Blade	Crimper				
Catalog Number	Description	Throat Depth in. (mm)	Jaws	Length in. (mm)	Net Wt. oz. (g)
SC2	Single Crimper	1-1/8 (28.6)	Carbon Steel	8 (203)	16 (454)

Single

Crimper

Blind Rivets

Steel, Aluminum, Stainless, Copper, & Painted

Malco Blind Rivets provide a strong, secure connection between two or more sheets of material, that will not loosen with vibration. Blind rivet fasteners can be used where access is limited to only one side of the material to be fastened. Rivets require only a predrilled or pre-punched hole. The blind rivet is an assembly, consisting of a mandrel and an eyelet body. Mandrels are used only to set the rivet body and are then discarded. Mandrel is designed to break off at the crimp after pulling (setting) the rivet body. No operator skill is required to set blind rivets. Low rivet profile offers cosmetic advantages over screws.



Shear and Tensile Strengths \$



Rivet / Mandrel	Rivet Dia.	Minimum Shear	Tensile lbs.
Steel Rivet	1/8 in.	260	310
Steel Mandrel	3/16 in.	540	680
Aluminum Rivet	1/8 in.	120	150
Aluminum Mandrel	3/16 in.	260	320
Stainless Rivet	1/8 in.	420	530
Stainless Mandrel	3/16 in.	950	1,200
Copper Rivet Steel Mandrel	1/8 in.		

IFI 114 2003 (R2008) Grade 20

Note: Package sizes available in Bulks, Tubs (T), and Bags (G).

Blind Rive	ets (Head	Width .25	Head Th	ickness .032	• Rivet D	iameter 1/8 in.)				
Bulk	Bulk Qty	Tub	Tub Qty	Bag	Bag Qty	Description	Hole Size # / Drill #	Rivet Body Length	Rivet Body Diameter	Grip
SS42D	10,000	SS42DT	1,000	SS42DG	100	Steel Rivet Plated Steel Mandrel	.125135 / #30	.232	.125	.063125
		SS43DT	1,000	SS43DG	100	Steel Rivet Plated Steel Mandrel	.125135 / #30	.294	.125	.126187
SS44D	10,000	SS44DT	1,000	SS44DG	100	Steel Rivet Plated Steel Mandrel	.125135 / #30	.357	.125	.188250
		SS46DT	1,000.	SS46DG	100	Steel Rivet Plated Steel Mandrel	.125135 / #30	.481	.125	.313375
AA42D		AA42DT	1,000	AA42DG	100	Aluminum Rivet Aluminum Mandrel	.125135 / #30	.232	.125	.063125
AA44D		AA44DT	1,000	AA44DG	100	Aluminum Rivet Aluminum Mandrel	.125135 / #30	.357	.125	.18825
		SS/SS42DT	1,000	SS/SS42DG	100	Stainless Rivet Stainless Mandrel	.125135 / #30	.232	.125	.063125
		SS/SS44DT	1,000	SS/SS44DG	100	Stainless Rivet Stainless Mandrel	.125135 / #30	.357	.125	.18825
		SS/SS46DT	1,000	SS/SS46DG	100	Stainless Rivet Stainless Mandrel	.125135 / #30	.481	.125	.313375
		SS/SS48DT	500	SS/SS48DG	100	Stainless Rivet Stainless Mandrel	.125135 / #30	.606	.125	.376500
CS42D	10,000	CS42DT	1,000	CS42DG	100	Copper Rivet Plated Steel Mandrel	.125135 / #30	.232	.125	.063125
		CS44DT	1,000	CS44DG	100	Copper Rivet Plated Steel Mandrel	.125135 / #30	.357	.125	.18825
AA42DW 🔘	10,000	AA422DWT	1,000	AA42DWG	100	Aluminum Rivet Aluminum Mandrel (White)	.125135 / #30	.232	.125	.063125
AA44DW O	10,000	AA44DWT	1,000	AA44DWG	100	Aluminum Rivet Aluminum Mandrel (White)	.125135 / #30	.357	.125	.188250
AA42DMB	10,000	AA42DMBT	1,000	AA42DMBG	100	Aluminum Rivet Aluminum Mandrel (Musket Bronze)	.125135 / #30	.232	.125	.063125
AA44DMB	10,000	AA44DMBT	1,000	AA44DMBG	100	Aluminum Rivet Aluminum Mandrel (Musket Bronze)	.125135 / #30	.357	.125	.18825
AA42DRB		AA42DRBT	1,000	AA42DRBG	100	Aluminum Rivet Aluminum Mandrel (Royal Brown)	.125135 / #30	.232	.125	.063125
AA44DRB	10,000	AA44DRBT	1,000	AA44DRBG	100	Aluminum Rivet Aluminum Mandrel (Royal Brown)	.125135 / #30	.357	.125	.18825

2-in-1 Hand Riveter

Malco's 2IN1 Hand Riveter is easy to use with one hand and provides enough pulling power to set all popular rivet sizes. The 2IN1 adjustment features a single long stroke for most hand riveting applications and a short "ratchet action" power stroke for setting larger diameter rivets. The outside "jaw-grip adjustment wheel" opens and closes jaws with fingertip ease to fit any size mandrel and to obtain maximum stroke efficiency. Three nosepieces 1/8, 5/32, and 3/16 in., included with tool. Nose-pieces are stored in handle. Ideal for reaching into corners and recessed areas. Heavy duty all steel construction ensures long life and minimum wear. Polished finish, nickel-chrome plated. Red vinyl cushion grip and hand stop.







2IN1

(1) LONG STROKE: for most riveting applications.

(2) POWER STROKE: "Ratcheting Action" for large diameter rivets.

2IN1

2IN1 F	Premium Hand Rive	eter		
Catalog Number	Description	Capacities in. (mm)	Length in. (mm)	Net Wt. oz. (g)
2IN1	2-IN-1 Hand Riveter	(SEE BELOW)	8 (203)	20 (567)
Replac	cement Parts	Capacites		
ER41	Jaws	Capacities in. (mm)		
ER44	3/16 in. nosepiece	1/8 thru- 3/16 (3.18	- 4.8) steel mandrel	
ER45	1/8 in. nosepiece	1/8 thru- 5/32 (3.18	- 4.0) stainless steel r	nandrel
ER46	5/32 in. nosepiece			
HR37	Adjustment Rod assembly	,		

Economy Hand Riveter

Lightweight, compact size and slim nose projection allows this riveter to go wherever the work is. Four rivet nosepieces: 3/32, 1/8, 5/32 and 3/16 in. store in handle. Ideally suited for blind riveting applications in aluminum windows, gutter and downspout. Not for use with steel rivets larger than 3.2 mm. Insert rivet into pre-drilled work to be fastened and squeeze handles until mandrel snaps. Release grip on handles and mandrel will drop out front end of tool when tilted. Rugged steel construction with black paint finish and comfortable vinyl grip.

CR18

Economy Hand Riveter					
Catalog Number	Description	Capacities in. (mm)	Length in. (mm)	Net Wt. oz. (g)	
CR18	Economy Hand Riveter	3/32 thru 1/8 (2.4 - 3.2) steel rivets	8 (203)	22 (624)	

Hand Held Magnetic Sweep



MS12

Comfortable angled handle grip allows easy attraction of nails and metal debris on the worksite. Permanent magnets ensure long service life and resistance to shock and vibration. A quick release sleeve allows debris to be easily removed from tool into a bucket.



Powerful magnetic surface easily attracts metal debris.



Quick release sleeve for easy clean-up.



MS12

Hand He	ld Magnetic Sweep		
Catalog		Tool Length.	Net Wt.
Number	Description	in. (cm.)	lbs. (kg)
MS12	Hand Held Magnetic Sweep	34-1/2 (88)	5.0 (2.27)

CR18

Non-Slip Manual Tie Tensioning Flex Duct Tools

Flex Duct Tools Tighten nylon cable ties to fiberglass duct take off connections faster, easier, and with better quality than by hand.



Malco's TY4 and TY4G (Vinyl Gripped) Cable Tie Tensioning Tools feature a manual, easy to operate, cutting mechanism and comfortable gray vinyl cushioned grips. When the tie is tight, a simple pull of the lower handle causes a blade to engage and cut off the excess tail of the nylon tie. A reduced

pinch point handle closing ensures peace of mind and reduces injury. Malco Tie Tools are designed to work on standard 175 lb. ties as well as thinner 125 lb. ties.

Adjustable Tie Tensioning Flex Duct Tool

Designed for heavy users of nylon cable ties, that features a desired tension adjustment knob.



Malco's TY6 Tie Tensioning Tool is designed for heavy users of nylon cable ties, and is a more efficient, higher quality alternative to installing flexible duct to take offs. The TY6 features an adjustment knob that allows an installer to set a desired tension for securing flex duct to a take-off collar. When the

tie is tight, a breakaway spring mechanism releases the tool's lower handle, which causes a blade to engage and automatically cut off the excess tail of the nylon tie. No extra operation for manual trimming is required. Operating Malco's TY6 Tie Tensioning Tool is also easy on the installer. Contoured handles, with stops, are easier to grasp. Furthermore, the smooth lever action and vinyl cushion grips minimize hand and arm fatigue on big jobs.



Tensioning adjustment knob and automatic cut-off mechanism turn adjustment knob clockwise to increase tension and counter clockwise to decrease tension.

CAUTION: Do not over tighten adjustment knob with fingers. Adjust knob only with fingers to avoid breaking ties before cut-off occurs.



Specifications

Flex Duct Tie Tools					
Catalog Number	Description	Length in. (mm)	Net Wt. oz. (g)		
TY6	High Leverage Flex Duct Tie Tool	8-1/2 (216)	15 (425)		
TY4	Manual Cut-Off Flex Duct Tie Tool	6 (152)	10 (284)		
TY4G	Manual Cut-Off Flex Duct Tie Tool / Gripped	6 (152)	11 (312)		





Secure Choice!

Use Malco adjustable nylon ties to install flexible duct to take-offs, or secure bundles, up to 15 in. (3.81 cm) diameter. Made of 100% nylon, Malco ties offer a minimal tensile strength of 175 pounds.





The Malco FDS1 Flexible Duct Support eliminates air flow restrictions and increases efficiency to dramatically reduce utility bills and improve heated or air-conditioned room comfort. A properly supported 90° duct elbow typically improves air flow efficiency 10 to 40%. A Malco Duct Support quickly installs on new or existing flexible duct. The versatile FDS1 design uses either 36 or 48 inch nylon cable/zip ties to accommodate 4 inch to 16 inch diameters of flexible fiberglass wool duct as well as un-insulated flexible duct. And the strong, but lightweight, 100% recycled polymer support will not weigh down ducting.










EDS1

I	Flex Duct Support							
	Catalog Number	Description	(Tie Requirements per Duct Diameter) Duct Diameter	Number of Ties	Nominal Dimensions in. (cm)	Net Wt. oz. (g)		
	FDS1	Flexible Duct Support	4-10 in. (10.2-25.4 cm) 12-14 in. (30.5-35.6 cm)	2) 36 in. (91.4 cm) 2) 48 in. (121.9 cm)	15 x 11-1/4 x 3 (38.1 x 28.6 x 7.6)	3 (85)		

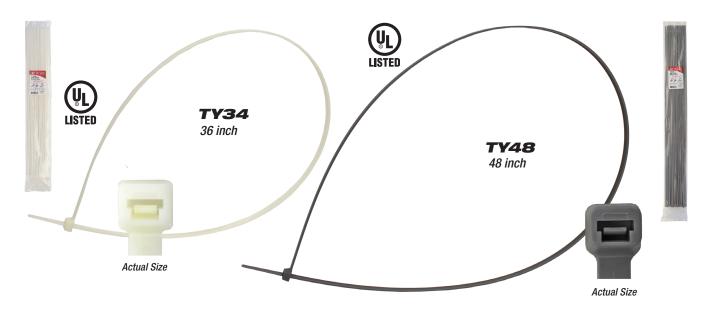

Specifications


Nylon Ties		
Catalog Number	TY34	TY48
Overall Length	36 in. (914 mm)	48 in. (1,219 mm)
Width	3/8 in. (9.5 mm)	3/8 in. (9.5 mm)
Thickness	3/32 in. (2.29 mm)	3/32 in. (2.29 mm)
Min. Tensile Strength	175 lbs.	175 lbs.
Max. Adjustable Dia.	10.35 in. (263 mm)	14.37 in. (365 mm)
Color	Natural	Gray
For Malco Tie Tools	TY4, TY4G, TY6	TY4, TY4G, TY6


Nylon Ties for Tie Tools

36 & 48 inch Heavy-Duty Nylon Ties

36 and 48 inch Extra Heavy-Duty Ties are rated for indoor use including securing HVAC take-offs, and securing / bundling heavy cables and hoses. (indoor use only)

FLEXIBLE DUCT TOOLS

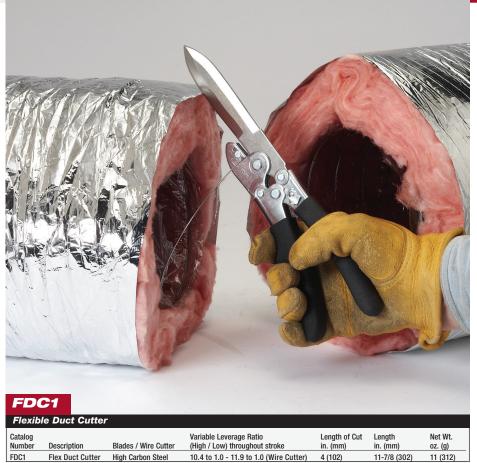



The Flex Duct Cutter (FDC1) has a built-in wire cutter that lets you finish the job you started with just one tool! A double edged blade cleanly pierces through outer skin and insulation. The fine honed blade, made with long lasting stainless steel, cuts from either direction around the entire circumference of the duct. The built-in wire cutter cuts hardened wire rib coil and features compound leverage for easy wire cutting. The Flex Duct Cutter also includes comfortable, non-slip vinyl gripped handles. Puncture resistant nylon sheath (FDSH) included.



10.4 to 1.0 - 11.9 to 1.0 (Wire Cutter)

4-3/8 (111)


12-1/4 (311)

13 (369)



The Flex Duct Shear (FDC2) Cuts insulated flexible round duct and also cuts the duct liner's wire rib coil. Pointed bottom blade easily pierces duct to start cut. Heavy duty wire cutter is located away from scissor blades. Thumb operated latch ensures that sharpened blade edges stay closed when not in use. Puncture resistant nylon sheath (FDSH) included.

Heavy-Duty Steel

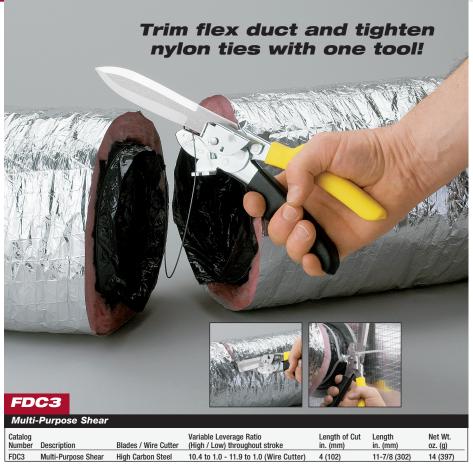



The versatile FDC3 Flex Duct Tool is actually three tools in one! The double-edged knife blade pierces through the flexible round duct and cuts in either direction. A thumb-operated latch opens the tool's compound-leverage handles and the jaws of a built-in wire cutter to easily sever the exposed wire rib coil of duct liner. Use the tool's tie-tensioning mechanism to install a nylon tie strap and secure the flex duct take-off collar. With the handles of the FDC3 in the open position, a nylon tie can be threaded through the mechanism and then tightened by gently pumping the tool's handles. Puncture resistant nylon sheath (FDSH) included.



Washers

Fiberglass duct board washers help to reinforce sheet metal components to fiberglass duct. Use with #8 screw for fastening components.

RW732 / FLW

Fibergla	Fiberglass Duct Board Washers					
Catalog Number	Description	Length in. (mm)	Width in. (mm)	Hole Dia. in. (mm)		
RW732	Galv. Reinforced Volcano Washer	2.5 (64)	2.5 (64)	7/32 (5.56)		
FLW	Galv. Reinforced Ductboard Washer	2.5 (64)	2.5 (64)	1/8 (3.175)		

Duct Knife and Sheath



DK6S

For cutting flexible fiberglass wool duct and duct board, the DK6S Duct Knife has double edge blades that are ideal for blind cuts in "flex" duct. Ergonomic cushion grip features one serrated cutting edge. Heavy-duty cutlery grade steel blades can be resharpened. Puncture resistant nylon sheath (FDSH) included.

FDSH

Puncture resistant nylon sheath included with FDC1, FDC2, FDC3 & DK6S.

- 2-3/4 in. (70 mm) wide belt loop.
- · Velcro safety strap

RW732



FLW



VINYL SIDING TOOLS





The NHP1R Punch makes a generous $5/32 \times 3/4$ in. $(4.0 \times 19.1 \text{ mm})$ horizontal slot for adding or elongating nail holes in vinyl and .019 in. (0.48 mm) aluminum siding to accommodate irregular stud spacing. Constructed of hardened steel stampings and rugged investment cast alloy steel jaws with rust-resistant nickel plate and black oxide finishes to ensure long service life.







The SL8R Snap Lock Punch for Vinyl Siding produces wider, more prominent rectangular tab projections for securing vinyl skirting or siding to finishing trim. The raised tabs grip a greater surface area and guard against dislodging due to relaxation of vinyl from heat or blowout during times of high pressure and wind. Constructed of hardened steel stampings and rugged investment cast alloy steel jaws with rust-resistant nickel plate and black oxide finishes to ensure long service life. Not Recommended for use below 32° F (0° C).



Snap lock plastic skirting and siding to finishing trim. Makes tabs in the cut edge of siding panel used as a finishing course at top of wall or below window. Tabs lock into utility trim.* Punch raises a high projection to compensate for natural relaxation of vinyl plastic. It also works well on aluminum siding but is not recommended for steel.

Note: The SL5 should not be used when PERMATABS are required to snap into finished trim. For this application we recommend using the Malco SL1R or SL2R Snap Lock Punch. PERMATABS is a trademark of C & H Enterprises. Not Recommended for use below 32° F (0° C).









Use a versatile Malco J-Channel Cutter to make drain tabs, downstream notch cutouts and miter trim cuts in vinyl channel. Available in three sizes for 1/2 inch (12.7 mm) channel, 5/8 inch (15.9 mm) channel and 3/4 inch (19.1 mm) channel. Tool operation is fast and easy! Light hand pressure produces a single handle click signal to ensure perfect drain tabs every time. Graduations on the upper jaw easily gauge tab or notch depths from 3/8 to 1-1/4 in. (9.5 - 31.2 mm). Use either side of the jaws to cut a 45-degree miter for a professional finished look. Hardened all-steel construction with rust resistant nickel chrome and black oxide finishes ensures long service life.

J-Chan	nel Cutters			
Catalog Number	Description	Knockout Width in. (mm)	Tool Length in. (mm)	Net Wt. oz. (g)
JCC50R	J-Channel Cutter 1/2 in. (12.7 mm)	.655 (16)	8-7/8 (225)	16 (454)
JCCR	J-Channel Cutter 5/8 in. (15.9 mm)	.840 (21)	8-7/8 (225)	16 (454)
JCC75R	J-Channel Cutter 3/4 in. (19.05 mm)	.975 (24)	8-7/8 (225)	16 (454)
Replacement Part				
5018	Handle Spring: Fits All Redline Handled Tool			





UltraLightweight Snips

The Blade on the ULV10 Ultra Lightweight Vinyl Snip features an extremely sharp knife-like bevel for easy starting and cutting in the thickest, hardest vinyl and other non-ferrous materials or fabrics, including trim coil. The snip has a strong, lightweight 10 in. (254 mm) polymer frame, and weighs less than 9 oz. (249 g). These lightweight Vinyl Snips have protective handle loops and are easy to grasp, while also producing a big 3 in. (76 mm) long controlled cut.

- Strong, lightweight 10 in. (254 mm) polymer frame
- Easy-to-grasp, protective handle loops
- Big 3 in. (76 mm) long controlled cut
- Designed for all weather conditions
- Includes a Full-Size Handle



Worry Free Blade Changes

A fully threaded brass insert thermally anchored in the blade area of the polymer frame for holding power and no loss of thread integrity.



ULV10

Ultra Li	ightweight Snip				
Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)	
ULV10	VInyl Cutting, Combination Snip	3 (76)	10 (254)	9.5 (254)	
Replacement Blades					
ULV10RB	•	<u> </u>			



Vinyl-Cutting Andy™Snips



Cut through Heavy Vinyl Siding Lock-Seams and more with ease!

The MV12 Aluminum Handled Snip is part of the legendary Andy™ SNIP line. This multi-purpose Andy™ combination snip design features a knife-like cutting edge to produce a smooth slicing action for easy one-hand operation. The user simply grasps the snip with the red grip up for optimal blade alignment when making straight cuts or left or right circular cuts in various non-ferrous materials including: Heavy grade vinyl siding, aluminum trim coil, landscape edging, vinyl flooring, carpeting and leather. Replacement blades are available and are easily installed in the field.



16.0

0

Thick Leather

Aluminum Trim Coil

Landscape Edging

MV12

Ultra L	ightweight Snip				
Catalog Number	Description	Length of Cut in. (mm)	Tool Length in. (cm)	Net Wt. oz. (g)	
MV12	Non-Ferrous Andy Snip	3 (76)	12 (31)	20 (567)	
Replacement Blades					
MV12RB	Carbon Steel				



Specifications Vinyl Cutting Circular Saw Blades Catalog Diameter Arbor Number Description **RPM** Teeth in. (mm) in. (mm) VCB1 Vinyl Cutting Saw Blade 7-1/4 (184) 6500 5/8 (15.875) VCB2EV Vinyl Cutting Circular Saw Blade 10 (250) 5/8 (15.875)

SideSwiper°II

Siding Removal Tool for Vinyl Siding



The Malco SideSwiper® II Vinyl Siding Removal Tool combines the comfort and added leverage of an easy-to-grasp straight handle with the smooth unlocking motion of a burr free hook. The blade of the removal tool is angled from the bottom plane of the handle and allows the user to keep their wrist straight while keeping knuckles well above the work. The surface finishing and plating of the blade ensures the sharply angled hook will not cut into the vinyl material or produce shavings. Additional comfort and control is achieved with a non-slip textured handle grip. The gripping surface will not become slick from moisture, and the form fitting, plastisol dip process, bonds the grip for the life of the tool.

Instructions:

- 1. Insertion: Wedge tip of blade under overlapping panel and hook onto the back lip of buttlock.
- Unlocking: Pulling lip downward, slide the tool along length of panel to unlock and expose nail row of panel to be removed.
- Panel Replacement: Lock and nail replacement panel into place. Use tool to relock overlapping panel. Pull down on panel lip and press it into lock of replacement panel below.



Vinyl-Cutting Circular Saw Blades

Cut through Vinyl Siding with Ease!





Easy One-Person Fiber Cement Siding Installation!



Siding Gauge Adjustable

The All-in-One Siding Installation Tool Set is built with and adjustable 5/16"- 5/8" clamping range and and adjustable 4"-8" (1/4" increments) facing range, allowing Pros to quickly and easily hang different types of fiber cement siding and other lap siding of various widths. The SGA eliminates the need for multiple gauges, shims, and more than one









FCG2 Overlap Gauges U.S. Patent No. D525,492



Overlap Gauges

- Two gauges support entire length of plank and precisely gauge a standard 1-1/4 in. (31.2 mm) overlap, even on a bowed wall.
- Works on 5/16 in. (7.9 mm) fiber cement siding plank.
- Will not mar finish of pre-painted siding.
- Strong, One-Piece tempered spring steel construction.
- Scan the QR Code for a step-by-step video!

Specifications

Olle-Fels	One-reison riber Cement Siding Installation 1001s					
Catalog Number	Description	Tool Length. in. (mm.)	Net Wt. oz. (g)			
FCG2	Fiber Cement Siding Overlap Gauges (pair)	6 (152)	4 (114)			
FCFG	Fiber Cement Siding Facing Gauge	10-7/8 (276)	2 (57)			
FCMS	Speed Set Gauges	10-7/8 (276)	4 (114)			
SGA	Siding Gauge Set, Adjustable	11.25 (286)	2.44 (69)			
AZ\$\$A	AZ MARKA					



WARNING

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.



- Adjustable for precise 5, 6, 7, or 8 in. (127, 152, 178 or 203 mm) exposures. Gauging block easily snaps into desired position without use of tools or fasteners.
- Easy to grasp with one hand while steadying new plank for nailing.
- Manufactured of tough, solid, weather-resistant nylon material.
- May be used with Overlap Gauge for 1-person application.
- Scan the QR Code for a step-by-step video!

Speed Set Gauges

Speed Set includes one of each of Malco's FCFG overlap and FCG2 facing gauge for 5/16 in. (7.9 mm) fiber cement siding installation.





Hidden Nail Cutter

The easiest way to cut hidden nails!



Malco's SNC Nail Cutter cuts hidden nails left over from removal of damaged or unwanted fiber cement siding plank without damaging overlapping plank.


The Flat head with a beveled leading edge easily maneuvers under the edge of siding and into corners.

- Saves time and effort when replacing or salvaging siding, thin building materials, and windows.
- Flat head with beveled edges easily maneuvers under edge of material and reaches into corners to cut hidden nails without damaging material.
- Precision-ground, heat treated jaws and compound handle leverage combine to cut up to 16D common nails with a low force requirement.



SNC

Hidden Nail Cutter					
Catalog		Length	Net Wt.		
Number	Description	in. (mm)	oz. (kg)		
SNC	Hidden Nail Cutter	18.5 (47)	28 (.79)		

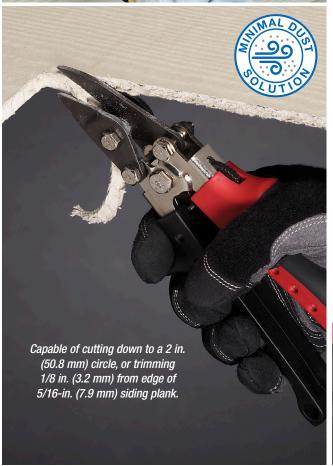



Malco's FCSR Fiber Cement Siding Snip is designed to cut 5/16-inch (7.9 mm) siding plank. The FCSR Snip makes precise arc and trim cuts from any work position fast and easy. Hardened all-steel construction with rust-resistant nickel plating and a black oxide finish ensures long service life.

FCSR

Fiber Ce	ment Siding Snip		
Catalog Number	Description	Tool Length. in. (cm)	Net Wt. oz. (g)
FCSR	Fiber Cement Siding Snip	8-1/2 (21.6)	12 (340)
Replace	ment Spring		

Replacement Spring



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

FIBER CEMENT SIDING TOOLS



Fold-out feet act as

support extensions.

Specifications

optional workbench-level operation.

Catalog
Number
Description
FCC7
Fiber Cement Angle Cutter

WARNING:
Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

These legs also allow the FCC7 to be mounted on saw horses for

Large guillotine work plate and open throat allows clearance for cutting any angle in 5/16 in. (8 mm) fiber cement planks up to 12 in. (305 mm) wide.



The Malco FCC4 Guillotine Shear Cleanly cuts 5/16 in. (8 mm) fiber cement siding without distortion or compression. A large, stable support plate, with board stop, ensures straight, square cuts in 8-1/4 in. (210 mm) wide plank with minimal dust. No sharpening required! The durable, lightweight steel frame and high leverage design offer long service life, easy handling and smooth cutting operation.



Fiber Cement Circular Saw Blades

with Carbide Tips

For repetitive cuts in fiber cement with power miters or portable circular saws, Malco now offers specialized Circular Saw Blades with PCD (PolyCrystalline Diamond) faced carbide tips for longer life. A lower number of teeth and deeper gullets produce cleaner, more precise cuts resulting in an accurately matched trim edge and tighter seams. Perfectly tensioned, hardened tool-steel blade ensures a flat true run.



Fiber Cement Circular Saw Blade

Fiber Cement Circular Saw Blade

Fiber Cement Circular Saw Blade

FCCB7

FCCB10

FCCB12

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer

7-1/4 (184

10 (254)

12 (305)

8300

5500

4700 8 5/8 (15.9)

5/8 (15.9)

1 (25.4)



QUICK ACTION"

Carbide Tipped Hole Saws and Accessories



Specifications

Quick Connect Arbor							
Catalog	Hex Opening	Thread					
Number	mm	Size in.	Use for Carbide Tipped Hole Saws				
HA3	10	5/8 - 18	1-3/8—6-5/16 (35-160)				

	Quick Change Pilot Drills								
	Catalog Number	Drill	Hex Shank mm	Overall Length in. (mm)	Drill Chuck in. (mm)	Use with Arbor			
	HH4	HSS	10	7-3/4 (196)	1/2 (12.7)	HA3			
l	HH5	CT	10	7-3/4 (196)	1/2 (12.7)	HA3			

Quick Release Set - Arbor with Pilot Drill									
Catalog Number	Drill	Hex Shank mm	Overall Length in. (mm)	Drill Chuck in. (mm)	Use for Carbide Tipped Hole Saws				
HHA4	HSS	10	7-3/4 (196)	1/2 (12.7)	1-3/8-6-5/16 (35-160)				

Important Note: New Catalog Numbers for Arbor, Pilot Drills, and Quick Release Sets are <u>not compatible</u> or <u>interchangeable</u> with any of these discontinued catalog numbers: HA1, HH1, HH2, HHA1, HHA2



WARNING:

Fiber cement contains crystalline silica. Respirable silica contained in cutting dust is known to cause cancer.

Quick Acti	ion Carbide Tipped H	ole Saws	
Catalog	Hole Diameter	Cutting Depth	Thread
Number	in. (mm)	in. (mm)	Size
HF1	1-3/8 (35)	2-1/4 (57)	5/8—18
HF2	1-7/8 (48)	2-1/4 (57)	5/8—18
HF3	2 (51)	2-1/4 (57)	5/8—18
HF4	2-3/8 (60)	2-1/4 (57)	5/8—18
HF5	2-1/2 (64)	2-1/4 (57)	5/8—18
HF17	2-9/16 (65)	2-1/4 (57)	5/8—18
HF6	2-3/4 (70)	2-1/4 (57)	5/8—18
HF7	3 (76)	2-1/4 (57)	5/8—18
HF8	3-1/2 (89)	2-1/4 (57)	5/8—18
HF18	3-5/8 (92)	2-1/4 (57)	5/8—18
HF9	4 (102)	2-1/4 (57)	5/8—18
HF10	4-1/8 (105)	2-1/4 (57)	5/8—18
HF11	4-1/2 (114)	2-1/4 (57)	5/8—18
HF19	4-5/8 (117)	2-1/4 (57)	5/8—18
HF12	5 (127)	2-1/4 (57)	5/8—18
HF13	5-1/4 (133)	2-1/4 (57)	5/8—18
HF14	5-1/2 (140)	2-1/4 (57)	5/8—18
HF15	6 (152)	2-1/4 (57)	5/8—18
HF16	6-5/16 (160)	2-1/4 (57)	5/8—18
Word Ke	v: HSS - High Speed Steel	CT - Carhide Tinned	

Word Key: HSS - High Speed Steel CT - Carbide Tipped

Hole in One®

A hole saw supplied with a dedicated arbor is always the right match, properly assembled and ready to use. BiMetal by Malco concentric construction ensures vibration-free cuts in any machinable metal, including tool steels and stainless. The variable 4/6 pitched tooth configuration milled into a high speed steel edge and micro-welded to a shatterproof alloy steel body easily tackles nail embedded wood. The generous 1-15/16 inch (49.2 mm) cup depth allows cuts in wooden studs, joists and door slabs in one pass.



BiMetal hole saw with supplied arbor easily cuts metal, nail embedded wood, studs, joists and door slabs.



HSB Hole Saw Bit

High speed 1/4 inch (6.4 mm) replacement pilot drill bit fits both original Hole-in-One hole saw with built-in arbor and current 2-piece Hole-in-One with dedicated separate arbor. Generous 3-sided, 1-13/16 inch (30.2 mm) long flats ensure easy positioning of replacement pilot drill bit in the pass-through shank of original welded-on arbor and positive connection with arbor cap screw of either original or current arbor.

Specifications

Hole in	Hole in One - Hole Saws						Recommended RPM Cutting Speeds			
Catalog Number	Diameter in. (mm)	Cup Depth in. (mm)	Bit Dia. in. (mm)	Teeth	Mild Steel	Stainless Steel	Tool and Cast Iron	Brass	Aluminum	
H30	1-7/8 (47.6)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	180	90	120	240	270	
H32	2 (50.8)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	170	85	115	230	255	
H38	2-3/8 (60.3)	1-15/16 (49.2)	1/4 (6.4)	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	140	70	95	190	220	
H44	2-3/4 (69.9)	1-15/16 (49.2)	1/4 (6.4))	Variable Pitched 4/6 per in. (25.4 mm), milled hook*	125	60	80	160	185	
Pilot D	rill Bit									
HSB	1/4 in. (6.4 mm) Hole S	Saw Bit - Length: 3-1/2 in	. (88.9 mm)							

*All BiMetal Hole Saws sizes feature 4/6 variable pitch teeth for aggressive cutting in all machinable materials.

Vent Saws® are designed for cutting all types of hard and soft wood, and other non-ferrous materials

including plywood, composition board and siding. The Malco Vent Saw is helpful when fitting fresh air intakes through foundation plates, exterior siding or facing materials encountered in residential or light commercial installations of gas or oil fired furnaces. It also features easily replaceable alloy steel blades and a versatile one piece cast aluminum arbor/mandrel combination with a 7/16 in. (11 mm) pilot drill. The webbed mandrel allows easy plug removal and a built-in arbor eliminates the need for separate arbor attachments.

HSX 13 in. (330 mm) Arbor Extension **Specifications** Vent Saws Catalog Diameter Depth of Cut Number Description in. (mm) in. (mm) HSW68 Vent Saw 4-1/4 (108) 2 (50.8) HSW97 6-1/4 (159) 2 (50.8) Vent Saw **HSRD** Replacement Pilot Drill 7/16 (11) HSX 13 in. (330 mm) Arbor Extension fits Malco Vent Saw® Repla ement Blades RBW68 HSW68 HSW97 RRW97 **WARNING:** Fiber cement contains crystalline silica. Respirable silica

contained in cutting dust is known to cause cancer



HSW68 7/16 in. (11.1 mm) pilot drill



The Fastest System for Strong and Secure Hog Ring Installation to chain-link fencing

Designed to address the most stringent regulatory codes, this commercial grade hog ring pliers ensures uninterrupted operation to quickly install rings. Long handles save time and effort with plenty of leverage and reach. The 25-count strips of collated rings can be loaded into the pliers' symmetrical magazine from either direction. A plunger feed automatically sets up each ring. There is no need to manually rotate the magazine out of the way as the pliers' clinching mechanism brings the ring forward of the nose for easy access to tension wire and fence.



Steel

HRA5


Aluminum Hog Rings, 9-ga. (3.8 mm) Lightweight for Fast Installation

- Twice as strong as closest alternative
- 6061-T94 or 5052-H38 alloy
- 25-piece loading strips with no sharp points are safe and easy to load
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals

HRS5

Galvanized Steel Hog Rings, 9-ga. (3.8 mm) Strong and Weather Resistant

- Twice as strong as closest alternative
- Class 3 coating per ASTM A641
- · 25-piece loading strips with no sharp points are safe and easy to load
- . The only collated 9-ga. steel hog rings on the market
- One 500 pack secures 1000 feet (305 m) of tension wire spaced at 24 in. (61 cm) intervals



HRP5

Comme	rcial Grade Hog Ring	g Pliers									
Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Weight lbs. (oz.)	For Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in (mm)	Thickness Gauge (mm)
HRP5	Hog Ring Pliers w / Mag.	HRA5 / HRS5	20 (50.8)	2.9 (1.32)	_	_	_	_	_	_	_
Steel a	nd Galvanized Hog R	ing Staples									
HRS5	Hog Ring Staples				HRP5	Galvanized Steel	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)
HRA5	Hog Ring Staples				HRP5	Aluminum Alloy	500	1-7/16 (37)	5/8 (16)	7/16 (11)	9 (3.8)
Replace	ement Part										
HRP5RP	Replacement Plunger / Spri	ng Assembly			HRP5						

HRP1 **Hog Ring Pliers** Hog Ring Catalog Net Wt Length Number Description Usage oz. (g) HR1 / HR2 **Hog Ring Pliers** 7 (178) 7 (198)

Fence Stapler

- Lightweight with easy spring actuated action
- Comfortable rubber-gripped handle
- Stop guide ensures proper hold on the hog ring
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR1, HR1X, (5/8 in., 16 mm) and HR2 & HR2X (3/4 in., 20 mm) hog ring staples



Fence Stapler with Magazine


- 50-staple magazine capacity
- · Easy removal of magazine for less storage space
- 2 built-in wire cutters with 11-gauge (3 mm) capacity
- Compatible with HR2 & HR2X (3/4 in., 20 mm) hog ring staples



Hog Ring Diameters and Ga.

HR2

Hog Ring

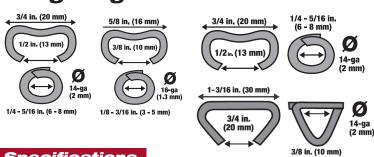

Specifications

HRP2

Hog Ring Pliers with Magazine

Description

Hog Ring Pliers with Magazine

Hog R	ings and A	ssociated Too	ls				
Catalog Number	Tools	Material	Qty.	Crown in. (mm)	Opening in. (mm)	Inside Dia. in (mm)	Thickness Gauge (mm)
HR1	HRP1	Galvanized Steel	1,250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
HR1X	HRP1	Galvanized Steel	250	5/8 (16)	3/8 (10)	1/8-3/16 (3-5)	16 (1.3)
HR2	HRP1/HRP2	Galvanized Steel	1,000	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
HR2X	HRP1/HRP2	Galvanized Steel	200	3/4 (20)	1/2 (13)	1/4-5/16 (6-8)	14 (2)
HR4	HRP4	Galvanized Steel	500	1-3/16 (30)	3/4 (20)	3/8 (10)	14 (2)

Fence Stapler with Magazine



HRP4

Hog Rin	g Pliers with Magazine			
Catalog Number	Description	Hog Ring Usage	Length in. (mm)	Net Wt. oz. (g)
HRP4	Hog Ring Pliers with Magazine	HR4	7-3/8 (187)	16 (454)

Net Wt

oz. (g)

15 (425)

Length

in. (mm)

7 (178)



Malco's fencing pliers are available in a highly maneuverable 8-inch (203 mm) length or a high leverage 10-inch (254 mm) model.

Malco's durable fencing pliers design features three serrated jaw areas for gripping, pulling and tying fence wire. Also, three built-in wire cutter locations ensure easy access for cutting up to 9-gauge (3.8 mm) chain link fence or tensioning wire. A compact, rounded and tapered nose allows easy entry and reach into tight areas. Textured handle surfaces promote safe and sure control. And durable hardened all-steel construction offers long, dependable service life. Malco fence pliers offered in two sizes.

Fencing	Pliers		
Catalog Number	Description	Tool Length in. (mm)	Net Weight oz. (kg)
FP1	8 in. Fencing Pliers	8 (203)	14 (0.40)
FP2	10 in. Fencing Pliers	10 (254)	20 (0.56)





FCP1 Multi-Purpose Fencing Pliers

- Combination hammer, wire tensioner, staple remover, wire cutter, and splicer
- Two built in wire cutters
- Hammer face
- · Claw to remove staples
- · All steel body









- For easy one-person installation of chain link fencing
- Set of two universal chain link fencing tensioners accommodates T-section or round posts





This offs fast

RRW6 Offset Ratcheting Wrench

l	Catalog				
ı	Number	Description	12 Pt. Hex Sockets	Nominal Length (mm)	Net Wt (g)
l	RRW6	Ratcheting Wrench, Offset	1/2 and 9/16 in.	6.75 in. (172)	5 oz. (142)

RRW6 Offset Ratcheting Wrench

This versatile, compact and lightweight offset ratcheting wrench provides easy fastener access. Finger switches are easily accessible to change ratcheting direction. A 25 degree offset design maintains clearance between fingers and chain-link fabric. The 12-point box heads, at each end of the wrench, grasp standard U.S. 1/2 inch and 9/16 inch hex fasteners from multiple angles. Through-hole socket openings accommodate any fastener length. Designed for long service life, it exceeds ASME minimum torque requirements.





Vinyl Fence Notchers

Vinyl fence picket and rail notchers are designed specifically for use with vinyl fencing.

Malco VFN1 & VFN2 Vinyl Fence Notching Tools create 1/2 and 3/4 inch (13 and 19 mm) wide and 7/8 inch (22 mm) deep louver-shaped tabs in the end sections of vinyl fence pickets or rails. The resulting raised tabs facilitate a durable lock that prevents the picket or rail from pulling out of the joint opening in a rail or fence post during high winds or abrupt blows. Notcher performance is clean and precise in temperatures from 40 degrees F (4.4 degrees C) to 120 degrees F (48.9 degrees C).





Compound leverage and exclusive RedLine handles reduce the fatigue of repetitive motions.



Quickly lock rails and pickets in place.



Easily create raised tabs on the job site.



The louver-shaped tabs create a durable lock that can withstand high winds and abrupt blows.

Specifications

Works in cold down to 40°F (4.4°C) and heat up to 120°F (48.9°C).

Spe	Cilications				,	(/
Vinyl Fe	ncing Notchers					
Catalog		Locking Tab Width	Tool Length	Net Weight	Lower Tab	Material
Number	Description	in. (mm)	in. (mm)	oz. (g)	Heignt in. (mm)	in. (mm)
VFN1	Picket and Rail Notcher	1/2 (13)	9 (229)	14 (397)	1/8 (3) approx.	.05125 (1-3)
VFN2	Rail Notcher	3/4 (19)	9 (229)	14 (397)	3/32 (2) approx.	.05125 (1-3)
Replacem	ent Part					
5018	Handle Spring: Fits All Redline Har	idled Tool				



Vinyl-Cutting Circular Saw Blades

Cut through Vinyl Fence Posts with Ease!



VCB3EV

Aggressive cutting 12 in. (305 mm) blade with carbide tipped teeth for easy cuts in fence post. (not recommended for vinyl siding)



VCB2EV

10 in. (250 mm) circular blade fits most power miters for making ultra smooth cuts.



Vinyl Cu	Vinyl Cutting Circular Saw Blades										
Catalog Number	Description	Diameter in. (mm)	RPM	Teeth	Arbor in. (mm)						
VCB1	Vinyl Cutting Saw Blade	7-1/4 (184)	6,500	186	5/8 (15.875)						
VCB2EV	Vinyl Cutting Circular Saw Blade	10 (250)	6,500	248	5/8 (15.875)						
VCB3EV	Vinyl Cutting Circular Saw Blade	12 (305)	5,800	100	1 (25.4)						



VCB1


Versatile 7-1/4 in. (184 mm) blade is a must have for portable circular saws.



Wood, Metal, Plaster & General Purpose

Reciprocating Saw Blades with BiMetal by Malco®

Reciprocating Saw Blades with BiMetal stack up better! For wood with nails, metal pipe, angles, and a variety of specialty applications from drywall to drain pipe, BiMetal by Malco stacks up best against the rest. These shatter proof blades are formulated from a premium metal composition consisting of a high speed steel cutting edge micro welded to a flexible high carbon steel back. Wood cutting BiMetal blades are available in a wide variety of profiles and tooth combinations to match cutting speed, plus control and maneuverability needed for the job.

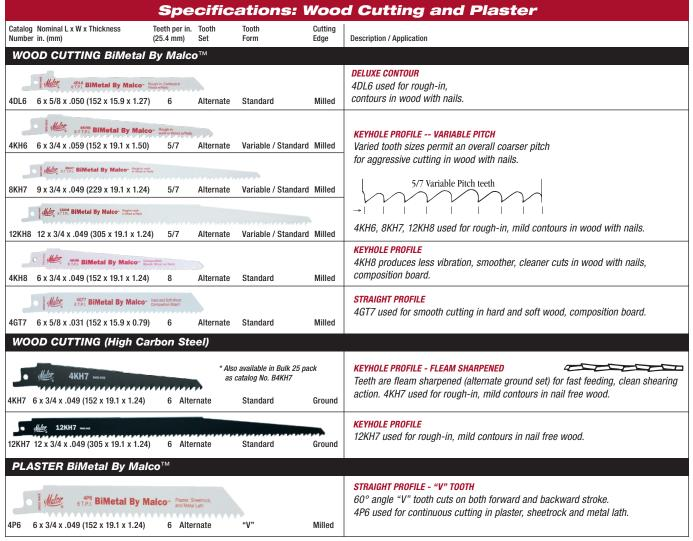



Select the Right Blades for the job!

Selecting the right blade for the job is critically important. Factors that should be considered are:

- 1. Type and hardness of material to be cut, which will determine the tooth form, thickness, and material composition of the blade to be used.
- Size and variation in cross section of stock to be cut which dictates the pitch of the teeth (or teeth per inch) required, tooth set, and blade length.
- 3. Type of cut, whether straight, contour, or both, will determine blade width.

Specifications: Metal Cutting and General Purpose

Catalog Number	Nominal L x W x Thickness in. (mm)	Teeth per in. (25.4 mm)	Tooth Set	Tooth Form	Cutting Edge	Description / Application
MET	TAL CUTTING BiMeta	al By Malc	o ™			
4TF14	477.4 BiMetal By Malco Service Person of X 3/4 x .031 (152 x 19.1 x 0.79)		Raker	Standard	Milled	STRAIGHT PROFILE - HIGH SPEED CUTTING 4TF14 used for metals, including stainless over 1/8 in. (3.2 mm.)
4TF18	6 x 3/4 x .031 (152 x 19.1 x 0.79)	to 1/8" Metals annount, Lt. Angles	Raker	Standard	Milled	4TF18 used for 18 gauge (1.22 mm) to 1/8 in. (3.2 mm) metals.
3MC24	3MC24 BiMotal By Malco 24 TPI Short Meal Pay Love 4 x 3/4 x .031 (102 x 19.1 x 0.79)	24	Wavy	Standard	Milled	3MC24 used for metal sheet, pipe, and profiles under 18 gauge (1.22 mm).
4MC24	4M024 BiMetal By Malco Tarre, Maria de Constitution de Const	Pice. Profices	Wavy	Standard	Milled	4MC24 used for metal sheet, pipe, and profiles under 18 gauge (1.22 mm).
9MC10	9 x 3/4 x .050 (229 x 19.1 x 1.27)	r Cast Iron th Cameter 10/14	Raker	Var. / Stan.	Milled	STRAIGHT PROFILE - VARIABLE PITCH 9MC10 used for pipe diameters to 4 in. (102 mm) 0.D. *Note: Do not use to cut waste slack.
MET	AL CUTTING High S	peed Stee	ı			
4MC14	4MC14 6 x 5/8 x .031 (152 x 15.9 x 0.79)		Raker	Standard	Milled	STRAIGHT PROFILE - HIGH SPEED CUTTING 4MC14 used for metals over 1/8 in. (3.2 mm) 4MC18 used for 18 gauge (1.22 mm) to 1/8 in. (3.2 mm) metals.
4MC18	6 x 5/8 x .031 (152 x 15.9 x 0.79 ERAL PURPOSE Bil	,	Raker ¶oloo™	Standard	Milled	
8PAP	As Propose Curring Progression 8 x 3/4 x .051 (203 x 19.1 x 1.30)		Wavy	Special Progr.	Milled	PLUNGE CUT TIP - PROGRESSIVE PITCH Smaller teeth near blade shank and larger teeth at tip for faster cuts / longer life. 8PAP is a BiMetal, PROGRESSIVE PITCH blade used for making fast cuts in wood, wood with nails, non-ferrous metals (including aluminum and brass), plastic and fiberglass. This durable blade offers outstanding performance in thick or thin materials.



Laminate Flooring Guillotine Shear

Quickly make square cuts in 5/16 in. (8 mm) laminate flooring.

Laminate flooring cut easier with Malco's Guillotine Shear for Laminate Flooring. The large stable plate with board-stop supports material to ensure square, straight cuts up to 8-1/4 in. (210 mm) long.

• No noisy operation • No sharpening required • Optimum leverage reduces fatigue • Durable lightweight frame • Cuts cleanly without distortion

FCC6

Guilloti	Guillotine Shear - Laminate Flooring							
Catalog		FI . 0	Net Wt.					
Number	Description	Flooring Capacity	lbs. (kg)					
FCC6	Guillotine Shear - Laminate Flooring	5/16 in. (8 mm)	22 (9.98)					



Channel Shears

Malco Channel Shears cut through metal studs and runners faster and more economically than any other tool on the market!

Malco Channel Shears complete cuts in one easy stroke without deforming metal channel. Die assembly ensures cutting action is clean and precise. Hollow ground hardened steel blade can be resharpened or replaced. A 36 in. (91 cm) long handle provides additional leverage making cutting with this shear almost effortless. Lightweight and portable enough to be where you want it, when you want it. Shear features rugged all steel and bolt construction. Handle has comfortable red vinyl grips.



3 STYLES



SRC24A

features a single installed die assembly with 3 channel sizes for cutting 1-5/8, 2-1/2, and 3-5/8 in. (41, 64, 92 mm) studs and matching runners.



SRC24A1 EV

features an installed die with 3 channel sizes for cutting 50, 70, and 92 mm studs and matching runners and an Extra Die for cutting 45, 64, and 95 mm studs and matching runners.



SRC24A2 SV

features an installed die with 3 channel sizes for cutting 51, 76, and 92 mm studs and matching runners and an Extra Die for cutting 45, 64, and 95 mm studs and matching runners.

Channel	Channel Shears									
Catalog		Variable Leverage Ratio	Stud & Runner Size	Stud & Runner Size	Height	Length	Depth	Net Wt.		
Number	Description	(High / Low) throughout stroke	Installed	Included	in. (cm)	in. (cm)	in. (cm)	lbs. (kg)		
SRC24A	Compound Leverage Channel Shear	Shear Action (Punch)	1-5/8, 2-1/2, 3-5/8 in.		8 (20)	36 (91)	6 (15)	23 (10.43)		
SRC24A1 EV	Compound Leverage Channel Shear	Shear Action (Punch)	50, 70, 92 mm	45, 64, 95 mm	8 (20)	36 (91)	6 (15)	23 (10.43)		
SRC24A2 SV	Compound Leverage Channel Shear	Shear Action (Punch)	51, 76, 92 mm	45, 64, 95 mm	8 (20)	36 (91)	6 (15)	23 (10.43)		

Capacities				Replacement Blades (All 3 Models)
	Material	Galvanized Steel 20 Gauge	Galvanized Mild 20 Gauge	Replacement Blade (All 3 models)
SRC24A	inches (mm)	.040 in. (1.02 mm)	.036 in. (0.91 mm)	10627 Field Replaceable: One replacement blade and two spacers.
SRC24A1 EV	inches (mm)	.040 in. (1.02 mm)	.036 in. (0.91 mm)	
SRC24A2 SV	inches (mm)	.040 in. (1.02 mm)	.036 in. (0.91 mm)	







Secures any width stud and runner without screws or other fasteners. Punch and die are easily replaceable. Maximum capacity 22 gauge stud and runner.

The PL1R Metal Stud Crimper features a unique punch and die shape that creates a rectangular crimp connection by bending over layered thicknesses of channel and stud at one time to form a sturdy bond without the use of fasteners. Lightweight and compact size allows the user to work overhead with ease. The tool body consists of a strong, die-cast aluminum "C" frame head and rust-resistant, nickel plated steel handles and parts stampings. The long-life punch and die are formed from tool steel and are also easily replaced on the job.



Malco's unique Ceiling Grid Punch makes a clean 1/8 in. (3.2 mm) hole in up to three layers of 25 gauge (0.53 mm) ceiling grid.

Malco's Ceiling Grid Punch makes clean 1/8 inch (3.2 mm) holes in up to three layers of 25 gauge (0.53 mm) ceiling grid. The tool's slim, but strong, "C" shaped steel frame ensures lightweight, one hand operation and allows easy access into tight corners. It is ideal for punching through main tees and perimeter wall angle that is to be secured with blind rivets. A generous throat opening allows full operation from the edge of both standard 1 inch and 1/2 inch (25.4 and 12.7 mm) grid profiles..



R308

Pocket size, swivel reamer

Pocket size reamer deburrs nominal 1/4 in. (6.4 mm) or larger tubing and fittings. Freely rotating, hardened steel blade holds its edge in both copper and ABS/PVC plastic. Under 6 in. (152 mm) overall length.

Specifications

Catalog Number	Description	Diameter in. (mm)	Length in. (mm)	Net Wt. oz. (g)
R308	Pocket Size, swivel reamer	_	_	_
FB1/2	Copper Tube Fitting Brush	1/2 (12.7)	5/8 (15.9)	1 (28)
FB3/4	Copper Tube Fitting Brush	3/4 (19.1)	7/8 (22.2)	1 (28)
FB1	Copper Tube Fitting Brush	1 (25.4)	1-1/8 (28.6)	1 (28)

Fitting Brushes



For use with copper tubing

Carbon steel crimped fill handle and stem. Available in three different sizes.

Plumbers Roll






AC310

Brown cloth closed coat, 120 grit alum. oxide.

Abrasive Mesh





AC5M

Actual Size of Weave

Abrasive cloth specifically designed for cleaning and preparing solder joint fittings

Creates a bite on metal surface for solder or paint. Aluminum oxide cutting grain rates 9.2 on MO scale (diamond=10). Flexible cloth back fits contours of any surface configuration and hard to reach areas. Long lasting urea resin bonding is water resistant.

180 grit open mesh cleans with both sides,

Requires only light pressure, lasts twice as long as cloth. Scrim is nylon weave. Waterproof adhesive bonding. Will not clog, load, or break down.

Fin Straightening Tools





Fin straightening tools with adjustable nylon combs

The FST tool straightens commonplace 8, 10, 12, or 14 fins per inch. Use the FST2 tool for straightening closely spaced 16, 18, 20, or 22 fins per inch. Both tools feature one-piece adjustable combs. The resilient nylon comb material will not damage the soft aluminum fins of condenser or evaporator units.

Heavy-Duty Tote Tray 1660


Perfect for hand tools and fasteners

This heavy duty, crush proof tote tray is great for carrying hand tools and fasteners to the job site. Rust proof polypropylene body material is long wearing, lightweight, and portable. Three roomy compartments to accommodate all the tools you need. Comfortable hand grip rolls to outside will not bite into palm of hand.

Catalog		Tote
Number	Description	Catalog
AC310	1-1/2 in. x 10 yd. (38.1 mm x 9.14 m) brown roll	Number
AC5M	1-1/2 in. x 5 yd. (38.1 mm x 4.57 m) mesh roll	1660
FST	Fin Straightening tool for 8, 10, 12, or 14 fins per inch	
FST2	Fin Straightening tool for 16, 18, 20, or 22 fins per inch	

Tote Tray										
Catalog		Nominal Dimensions	Net Wt.							
Number	Description	L x W x H (cm)		lbs. (kg)						
1660	Tote Tray	15 x 10 x 4-1/2 (38 x 25 x	11)	1.75 (0.79)						

Refrigeration Ratchet Wrenches



5/16 & 3/16 in. Hex Key Wrench Inserts

These hex key inserts, with 1/4 inch square shanks, fit any Malco Refrigeration Wrench for easy ratcheting action when servicing hard-to-access valves in ACR condensing units.

* The RRW316C Hex Key Insert has a shorter 3/16 inch hex point which makes the 5/16 inch hex body also accessible as a hex key for many valve applications.



RRW316



3/16 in. hex tip with 1/4 in. square shank. 2-3/16 in. 0/A length

RRW316C*



3/16 in. hex tip with 1/4 in. square shank. 2-3/16 in. 0/A length

RRW516

5-3/8" O/A Length



5/16 in. hex tip with 1/4 in. square shank. 2-1/8 in. O/A length

OFFSET RATCHET WRENCH SEE PAGE 99

5/16", 3/8" Square

Specifications

Refrigera	Refrigeration Ratchet Wrenches 5/16 and 3/16 in. Hex Key Wrench Inserts									
Catalog Number	Description	Square Shank Diameter in.	Hex Key Diameter in.	O/A Lgth. in.	Catalog Number	Description	Square Shank Diameter in.	Tip Lgth. in.	Hex Key Diameter in.	O/A Lgth in.
RRW4	Refrigeration Ratchet Wrench	1/4	1/2 & 9/16	6-7/8	RRW516	Hex Key Ratchet Wrench Insert	1/4	_	5/16	2-1/8
RRW3	Refrigeration Ratchet Wrench	3/16, 1/4, 5/16 & 3/8	_	5-1/2	RRW316	Hex Key Ratchet Wrench Insert	1/4	3/4	3/16	2-3/16
RRW5	Refrigeration Ratchet Wrench	3/16, 1/4, 5/16 & 3/8	_	5-3/8	RRW316C*	Hex Key Ratchet Wrench Insert	1/4	1/2	3/16	2-3/16
					RRW316 / 316C	Hex Key Ratchet Wrench Combo Kit	1/4	3/4 -1/2	3/16	2-3/16

3/16", 1/4" Square

Step Drills

Drill hole sizes from 1/8 to 1 in. through sheet metal without burring, deforming stock, or threading drill bit. A unique double flute design assures the penetration of soft or thin materials at the proper speed.

Malco Step Drills actually deburr as they drill. Perfect for use as a "hole-opening" reamer. They can also be used for making round holes from slots or intersecting holes. Made of industrial grade high speed steel. Malco Step Drills are heat treated and tempered to assure maximum strength for long wearing rugged use. (Note: All sizes listed in inches).



Step Dril	ls			
Catalog		Depth	Elect.	Pilot Hole
Number	Description	Each Step (in.)	Drill Size (in.)	Required in.
UB1	Drills 13 hole sizes from 1/8 to 1/2 in. diameter in 1/32 in. (0.79) increments.	1/8	3/8	No
UB11	Drills 11 hole sizes from 1/4 to 7/8 in, diameter for creating 1/2 in, knock outs.	N/A	3/8	No

Hex Key Folding Sets

Catalog Number	W19	W29	W45
	Small	Deluxe	Large
Description	Pocket	Pocket	Sizes
Handle Length	3-5/8 in.	4-1/4 in.	5-1/4 in.
Number of Keys	9	9	5
	Hex Sizes - Wi	dth Across Fl	ats (in.)
	.050	_	_
	1/16	_	_
	5/64	5/64	_
	3/32	3/32	_
	7/64	7/64	_
	1/8	1/8	_
	9/64	9/64	_
	5/32	5/32	_
	3/16	3/16	3/16
	_	7/32	7/32
	_	1/4	1/4
	_	_	5/16
	_	_	3/8



Produced from tough alloy steel.

Hex Corners of keys are sharp and clean. Finish is black oxide.

Flat spring holds keys in any work position.

Smooth zinc plated case can be used as handle for extra leverage.

Refrigeration Length Hex Keys

Available in 6 and 12 in. long series. Tough alloy steel with black oxide finish in clear storage tube.



W12 7 Piece Set Big 12 in. Length

Malco



W6 9 Piece Set 6 in. Length



Ball end for angles. Tough alloy steel. Black oxide finish.

Cushioned Gripped Hex Key Sets

Big 6 and 9 inch sets consist of 8 sizes: 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, and 1/4 in.

WT9SG

9 in. Long "T" Handle Keys 8 Sizes (3/32 - 1/4 in.)

WT618G 1/8 in. T-Hex Key 6 in. long. Individual WT918G 1/8 in. T-Hex Key 9 in. long. Individual WT6532G 5/32 in. T-Hex Key 6 in. long. Individual WT9532G 5/32 in. T-Hex Key 9 in. long. Individual WT6316G 3/16 in. T-Hex Key 6 in. long. Individual WT9316G 3/16 in. T-Hex Key 9 in. long. Individual

Specific	cations		
Hex Key Sets		Individual 6 in	. Long Wrenches
Catalog Number	Description	WT618G	1/8 in. T-Hex Key 6 in. long
WBL12S W19	12 Piece Ball Tip Wrench Set 9 Piece Hex Key Set (.050 - 3/16 in.)	WT6532G WT6316G	5/32 in. T-Hex Key 6 in. long 3/16 in. T-Hex Key 6 in. long
W29	9 Piece Hex Key Set (5/64 - 1/4 in.)	9 in. Long "T"	' Handle Keys
W45 W6	5 Piece Hex Key Set (3/16 - 3/8 in.) 6 in. 9 sizes: 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, and 1/4 in.	Catalog Number	Description
W12	12 in. 7 sizes: 5/64, 3/32, 1/8, 5/32, 3/16, 7/32, and 1/4 in.	WT9SG	9 in. Long T Handle Keys, 8 Sizes (3/32 - 1/4 in.)
Individual "L"	12 in. Long Hex Keys	9 in. Long "T"	Handle Keys
W12532	12 in. Long hex key size 5/32 in.	WT918G	1/8 in. T-Hex Key 9 in. long
		WT9532G	5/32 in. T-Hex Key 9 in. long
		WT9316G	3/16 in. T-Hex Key 9 in. long





- Kit contains 10 pieces total, including: 5 straight-fluted, extra-bite, hardened alloy steel extractors (sizes #1-5) and 5 matched left-handed cobalt drill bits: 5/64, 7/64, 5/32, 1/4, and 19/64 inch.
- Use for screw and bolt diameters of 1/4 inch (M3) to 5/8 inch (M15).



PV1

Use in hand or insert in drill chuck. Pin Vise holds wire gauge drill sizes 61 to 80.



Sheet Metal Drills

Sheet metal drills with 135° split point design bite into metal precisely where wanted - will not wander.



Sheet Metal DrillsTwo points for twice the life, twice the convenience! Available in bulk packs!

Catalog Number	Description Set Contents					Capacity	Length in.
10 Piece	Screw Extractor Kit						
SEK1		d, hardened alloy steel extractors (size	s #1-5) & 5 mat	ched left-handed	cobalt drill bits. (sizes above)	_	
	Orifice Drill Set						
FJ6180	20 Piece Orifice Drill Set Wire gauges si	zes for drilling or cleaning oil and ga	s orifices. Meta	DRILDEX conta	iner. Sizes: 61 to 80. Includes pin v	ise.	
Pin Vise	D: V					0 : 01 00	0.05
PV1	Pin Vise — — etal Drills (Fractional Sizes)					Ga. sizes 61-80	2.25
	etai Drilis (Fractional Sizes)						
Catalog Number	Description	Decimal Equivalent	Length in.	Length of twist	Package Size		
PFS1/8	Sheet Metal Drill Bit (Polished)	.1250	1-7/8	1/2	12		
PFS30	Sheet Metal Drill Bit (Polished)	.1285	1-15/16	1/2	12		
PFS1/4	Sheet Metal Drill Bit (Polished)	.2500	2-1/2	1/2	12		
Double E	nder Sheet Metal Drills						
DE1/8	Double Ender Sheet Metal Drill Bit (Polished)	.1250	2	1/2	12		
DE1/8B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polis	shed) .1250	2	1/2	144		
DE30	Double Ender Sheet Metal Drill Bit (Polished)	.1285	2	1/2	12		
DE30B	Bulk Pack Double Ender Sheet Metal Drill Bits (Polis	shed) .1285	2	1/2	144		
DE9/64	Double Ender Sheet Metal Drill Bit (Polished)	.1406	1-15/16	1/2	12		
DE3/16	Double Ender Sheet Metal Drill Bit (Polished)	.1875	2-3/16	1/2	12		
DE1/4	Double Ender Sheet Metal Drill Bit (Polished)	.2500	2-1/2	1/2	12		
NDE1/8	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1250	2	1/2	12		
NDE30	Double Ender Sheet Metal Drill Bit (Black Nitrided)	.1285	2	1/2	12		







Includes puncture wire







CGSN1Replacement
Nozzles for CGS1



Sausage caulking gun tool kit with 12:1 ratio drive. Dispenses 10 oz, 13 oz, or 20 oz sausage packs. Includes parts to convert gun to dispense bulk or 10 oz / 12 oz cartridges.

Caulk	Caulking Guns						
Catalog Number	Description	Cartridge Capacity	Cartridge Diameter	Length in. (mm)	Net Wt. oz. (g)		
CG10	Utility Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	17 (482)		
CG12	Flexible / Lightweight Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	25 (709)		
CG18	Versatile, Easy Dispensing Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	28 (794)		
CG20	Professional Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	28 (794)		
CGC1	High Thrust Caulking Gun	1/10 gallon	2 (51)	8-1/2 (216)	28 (794)		
CGS1	Sausage Caulking Gun Tool Kit	10-13-20 oz sausage pk, 10-12 oz cart.	2 (51)	8-1/2 (216)	28 (794)		
CGSN1	Replacement Nozzles for CGS1	_	_	_			

Break-Away Knife







BAKRB (10 pack)

7 Point heavy duty break-away blades for model No. BAK.

Quick Open Utility Knife











Utility Knife

4PK

Die-cast heavy duty model comes complete with three double point blades. Safe, easy to operate, thumb action mechanism on top facilitates three cutting positions: fully extended, partially extended for carton opening, and intermediate.



Extra durable, heavy gauge blades fit Malco 3PK, 4PK, 9PK knives & most other brands. Made of special alloy steel, precision ground to a fine cutting edge.

Malco 4PK

Quickly and safely dispense blades. Straight & Hook point blades are available in convenient 50 pack plastic dispenser.






Large hook points work great in multiple layers of asphalt shingles.


Utility Knives		Replacement Blades	
Catalog		Catalog	
Number	Description	Number Description	
BAK	7 Point Break-Away Knife	BAKRB Break Away Blades (10 pack, 7 points)	
4PK	3 Position Utility Knife (top button)	UBS5 Straight Double Point Blades (5 pack carded)	
9PK	Quick Open Utility Knife	UBS50 Straight Double Point Blades (50 pack dispenser)	
		UBH5 Hook Point Blades (5 pack carded)	

Magnetic Tape Measures

Malco's "Magnetic Tip" tape measures are ideal for every ferrous metal working project! A powerful magnet and self-supporting 1 in. (25.4 mm) wide blade makes one-person measurements and measuring







Powerful magnets!

Non-Magnetic Tape Measures



Malco's non-magnetic tape measures offered in 25 in. and 30 in lengths. Both tape measures have a 1 in wide blade with a double riveted tip connection. A rubber-clad housing ensures toughness for evervdav use.

Zero commencement:

Specifications

Tape Measures						
Catalog Number	Description	Net Wt. oz. (g)	Catalog Number	Description	Net Wt. oz. (g)	
T416M	1 in. x 16 ft. Magnetic Tip Tape Measure	10 (284)	CT425	1 in. x 25 ft. Tape Measure	13 (369)	
<u>T425M</u>	1 in. x 25 ft. Magnetic Tip Tape Measure	14 (397)	CT430	1 in. x 30 ft. Tape Measure	16 (454)	
T430M	1 in. x 30 ft. Magnetic Tip Tape Measure	17 (482)				

Rotary Percussion Bits

Use in any rotary or rotary percussion drilling device for unexcelled performance in brick, tile, granite, concrete, masonry and other similar hard and dense materials. Brazed tungsten carbide tips have 120° chamfer and are specially tempered for strength and long life.

Specifications

Carbide	Carbide Tipped Rotary Percussion Bits						
Catalog Number	Description	Nominal Overall Length (in.)	Bit Dia. (in.)	Shank Dia. (in.)			
RP01	Carbide Tipped Rotary Bit	3	1/8	1/8			
RP04	Carbide Tipped Rotary Bit	3-5/16	3/16	3/16			
RP09	Carbide Tipped Rotary Bit	4	1/4	1/4			
RP10	Carbide Tipped Rotary Bit	6	1/4	1/4			

Electrical Pliers

Cutter / Stripper / Crimper Up front scissors action strips copper wire clean and easily cuts sizes 10 thru 20.

Bolt cutters leave a perfect rethread. Plier nose features serrated jaw and slim profile for pulling and putting loops on wire. Crimps all insulated and non-insulated solderless terminals including 7-8 mm auto. Lifetime pivot point assures greater joint strength and adds easy, precise adjustment capability. Black oxide, satin finish steel. Extra large red vinyl cushion grips.



Electric	al Pliers								
Catalog	Decembring	Capacities	Capacities	Capacities	Capacities	Crimping	Stripping	O/A Length	Net Weight
Number	Description	AWG	Metric (mm)	Bolt	Cutting	Gauge	Gauge	in. (mm)	oz. (g)
WSC8	Electrical Pliers Cutter / Stripper / Crimper	_	_	4-40 / 5-40 / 6-32	8-32 / 10-32 / 10-24	22-10 ga.	22-10 ga.	8-1/4 (210)	8 (226)

Aluminum Straight Edge Rule



48AR

Made from .125 thickness extruded aluminum. This 48 in, rule is 2 in, wide, Large and clear, easy to read, thermo-bonded red markings on gray finish. Can be read from either end. Graduations in eighths and sixteenths.

Tinner's Circumference Rules



48CR Heavy Duty

Standard bench rules with circumference readings for sheet metal work. Made from stainless steel which means they never need to be oiled. Fully etched markings are black filled for easy reading. 150 circumference inches in 1/8 in. increments both sides. Rules are 48 in. long x 1-1/4 in. wide.

Precision Multi-Use Combination Square



SCS12 12 in. with solid mounted vial

Use as a tri or miter square, height or depth gauge, or for striking parallel or right angle lines. A full view vial allows easy leveling or plumb work!

• 1/8, 1/16, 1/32 in., with cm and mm graduations permanently etched in stainless steel blade.

- Heavy-duty aluminum anvil has self-adjusting draw bolt for easy adjustment and set-up.
- · Hardened steel scribe for making clean markings and lines stored in anvil.
- **Specifications** Precision-machined surfaces ensure accuracy.

48 in.	Straight Edge				
Catalog Number	Description	Upper Scale Graduations (in.)	Lower Scale Graduations	Graduations (in.)	Net Weight Ibs. (oz)
48AR	48 in. Aluminum Straight Edge Rule	_	_	Increments to 1/16	1 (16)
48 in.	Tinners Circumference Rules				
48BS	48 in. Tinners Circumference Rule (Semi-Flexible)	Increments to 1/16 both sides	150 circumference inches in 1/8 in. increments both sides	_	
48CR	48 in. Tinners Circumference Rule (Heavy-Duty)	Increments to 1/16 both sides	150 circumference inches in 1/8 in. increments both sides	_	_
Combi	ination Square				
SCS12	Combination Square 12 in. with solid mounted vial	_	_	_	12 (340)

Professional Grade Aluminum Torpedo Level



- **L᠑** Professional grade solid aluminum frame.
 - Three easy-read vials with white surrounds.
 - V-grooved working edge for use on pipe and conduit.

Magnetic Aluminum Torpedo Level



Specifications

- Full length magnetic strip.
- Professional grade solid aluminum frame.
- Three easy-read vials with white surrounds.
- V-grooved working edge for use on pipe and conduit.

Magnetic Tip Pocket Level . Strong Magnetic pick-up tip.



- V-Grooved edge fits pipe and conduit.
- Use to check electrical boxes and thermostats.
- Durable plastic molded frame.

_					
Levels					
Catalog Number	Description	Line Length in. (mm)	Number of Vials	Net Weight oz. (g)	
<u>L5</u>	Pocket Level with Magnetic Tip	5 (127)	1	_	
L9	9 in. Top Reading Torpedo Level	9 (229)	3	_	
L9M	9 in. Top Reading Torpedo Level with Magnetic Base	9 (229)	3	_	

INDEX

10627104	BAK111	DB159	FS2DL72	HF294
12F56	BAKRB111	DE1/4109	FS2DS72	HF394
12KH7102	BHE1026	DE1/8109	FS2F15071	HF494
12KH8102	BHE1226	DE1/8B109	FS2F20071	HF594
127TCS67	BHE326	DE3/16109	FS2F35071	HF694
1660106	BHE626	DE30109	FSBAG70	HF794
1860	BT13119	DE30B109	FSBAG271	HF894
18F56	BT13219	DE9/64109	FSC170	HF994
2DH58	BT13319	DEFT68	FSH270	HH494
2IN181	BT13419	DEFT168	FSHS73	HH594
2460	BT14119	DK6S85	FSHS273	HHA494
24F56	BT14219	DR6961	FSLR70	HHA594
274TCS67	BT14319	DR7061	FSP175	HHD123
3MC24103	BT14419	DR7161	FST106	HHD1S23
48AR113	BT15319	DS157	FST2106	HHD1T23
48BS113	BT15619	DS1C57	FSXC74	HHD223
48CR113	BT16319	DS257	FSXC274	HHD2S23
4DL6102	BT16419	DS357	FSXCRPC74	HHD2T23
4GT7102	BT23119	DSKR46	FSXCRPC274	HHD323
4IN127	BT23319	DSKRBP46	FSXS73	HHD3S23
4IN1i27	<i>C</i>	E	FSXS273	HHD3T23
4KH6102	C4R79	ER369	FSXSRPDW73	HP18KR58
4KH7102	C5A231	ER4181	FSXS2RPDW73	HPD1858
4KH8102	C5A2RD EV31	ER4481	FTC199	HPD31658
4MC14103	C5R45	ER4581	G	HR197
4MC18103	C6R45	ER4681	GND78	HR1X97
4MC24103	CB28	F	G0P23UK77	HR297
4P6102	CB10028	FB1106	GOP23XRB77	HR2X97
4PK111	CBB28	FB1/2106	GOP23XUK77	HR3781
4TF14103	CDR59	FB3/4106	GOP34UK77	HR497
4TF18103	CG10110	FBS1BX62	G0P34XRB77	HRA596
501843	CG12110	FBS2BX62	GOP34XUK77	HRP197
7504667	CG18110	FBSN62	GOPRB77	HRP297
8KH7102	CG20110	FBSN162	GOT77	HRP497
8PAP103	CGC1110	FBSN262	GOTRK77	HRP596
9MC10103	CGS1110	FBSNS62-63	GOTRC77	HRP5RP96
9PK111	CGSN1110	FBSNW62-63	GSG678	HRS596
A	CGP18105	FCC493	H	HSB95
A060	CGPR105	FCC6104	H110061	HSRD95
A260	CONNEXT122-23	FCC792	H3095	HSW6895
A2060	CONNEXT222-23	FCCB1093	H3295	HSW9795
A360	CONNEXT322-23	FCCB1293	H3895	HSX95
A4060	CONNEXT421	FCCB793	H4495	HW10X1/2Z17
A5060	CONNEXT521	FCFG90	HA394	HW10X1-1/217
A6060	CR1881	FCG290	HC128	HW10X1Z17
AA42D80	CRHREXKIT115	FCMS90	HC1B29	HW10X217
AA42DW80	CRHREXKIT215	FCP199	HC1D29	HW10X3/4Z17
AA44D80	CS42D80	FCSR91	HC1E29	HW12X217
AA44DW80	CT425112	FDC184	HC1G29	HW6X3/8Z17
AC310106	CT430112	FDC284	HC1H29	HW6X3/8ZRB17
AC5M106	D	FDC385	HC1I29	HW6X3/8ZW17
AV139	D4AST61	FDS183	HC1K29	HW7X1/2Z17
AV239	D510061	FDSH85	HC228	HW7X1/2ZA17
AV339	D5AST61	FJ6180109	HF194	HW7X1/2ZRB17
AV3339	D610061	FLW85	HF1094	HW7X1/2ZW17
AV639	D6AST61	FP198	HF1194	HW8X1/2Z17
AV6339	D6HT10061	FP298	HF1294	HW8X1-1/2Z17
AV739	D6HTAST61	FS1DL72	HF1394	HW8X1-1/2ZW17
AV7339	D7AST61	FS1DS72	HF1494	HW8X1Z17
AV839	D7HT10061	FS1N7570	HF1594	HW8X1ZRB17
AV939	D7HTAST61	FS1N16570	HF1694	HW8X1ZW17
AVM6 EV40	D8AST61	FS1W16570	HF1794	HW8X2Z17
AVM7 EV40	D8HT10061	FS1W21570	HF1894	HW8X2ZW17
В	D8HTAST61	FS1W36570	HF1994	HW8X3/4Z17

UW0V2/47DD 17	MSH2XLC212	N2R45	SD226	TSS152
HW8X3/4ZRB17 HW8X3/4ZW17	MSH3823	NDE1/8109	SD2!25	TSS1RB EV52
HW8X3ZW17	MSH38I25	NDE30109	SD2XIP25	TSV152
ПW0/3/2W1/	MSH3XLC212	NHP1R86	SDX126	TSV1RB52
IMSHC212	MSH4XLC212	NIT IN00	SDX126	TX10IP25
IMSHMLC212	MSH51623	PA101217	SEK1109	TX10IP25
IMSHXLC212	MSH516I25	PA81017	SG1068	TX15IP25
	MSH516T23	PC1 EV66	SG1068	TX15IP25
JCC50R87	MSHC10	PFS1/4109	SGA90	TX20IP25
	MSHC110	PFS1/4109	SH359	TX20IP25
JCC75R87 JCCR87	MSHC212	PFS30109	SH3V59	TX25IP25
L	MSHC312	PH2IP25	SL1R45	TX25XIP25
L5113	MSHCM111	PH2XIP25	SL2R79	TX27IP25
L9113	MSHCM211	PH3IP25	SL586	TX27IF25
L9M113	MSHCM311	PH3XIP25	SL8R86	TX30IP25
L9M113	MSHCST13	PL1R105	SM164	TX30XIP25
М	MSHCST313	PLD1105	SM264	TY3483
	MSHL1423	P08X2ZW17	SNC91	TY482
M12A35 M12ARB35	MSHL14I25	PS8X1/2Z17	SRC24A104	TY4883
M12N33		PT166		TY4G82
M12NG33	MSHL14T23 MSHL3823	PV1109	SRC24A1 EV104 SRC24A2 SV104	TY682
M12NG33 M12NRB33		PWS163	SRC24A2 SV104 SRT289	1 Y682
M12NKB33 M14A35	MSHL38I25 MSHL51623	PWS163	SRT2B89	UB1107
M14N33	MSHL51625	PWSZ62	SS42D80	UB11107
M14NRB33	MSHL516T23	PW5K102	SS42D80 SS43D80	UBH5111
		R308106	SS44D80	UBS5111
M1541 M2000S37	MSHL71623	RB40067	SS44D80 SS46D80	UBS50111
	MSHL716125 MSHLC10			
M200137 M200237	MSHLC110	RBW6895 RBW9795	STKMR46 STKMRBP46	UC165 ULC1041
M200237	MSHML1423	RD627	51KWINDP40	ULV1088
M200437	MSHML14125	RH459	T416M112	ULV10RB88
M200437	MSHML51623	RH4V59	T425M112	ULV IUND00
M200637	MSHML516125	RP01112	T430M112	VCB189, 101
M200737	MSHMLC10	RP04112	TB147	VCB2 EV89, 101
M941	MSHMLC110	RP09112	TBP3347	VCB2 EV101
MB48A54	MSHMLC212	RP10112	TC12767	VFN1100
MB48B55	MSHMLC312	RRW3107	TC17467	VFN2100
MB48B255	MSHMLCM111	RRW316107	TC27467	W
MB48B355	MSHMLCM211	RRW316/316C 107	TC31267	W12108
MB48B455	MSHMLCM211	RRW316C107	TC40067	W12108
MBH1426	MSHXL1423	RRW4107	TNP2CL78	W12552108
MBL54-55	MSHXL14I25	RRW5107	TNP2R78	W29108
MBLP226	MSHXL14T23	RRW516107	TNP2S78	W45108
MBLP326	MSHXL3823	RRW699	TNP3S78	W6108
MBLP426	MSHXL38I25	RW12767	TNP3SB78	WBL12S108
MBSP226	MSHXL51623	RW27467	TNP3SH78	WN10061
MC12A35	MSHXL516I25	RW73285	TR1860	WSC8112
MC12L33	MSHXL516T23	S	TR4260	WT618G108
MC12LRB33	MSHXLC10	S1068	TS150	WT6316G108
MC12N33	MSHXLC110	S1168	TS1RB50	WT6532G108
MC12NG33	MSHXLC212	S2R43	TSCG49	WT6SG108
MC12NRB33	MSHXLC312	S3R43	TSCM51	WT918G108
MC12ARB35	MSHXLCST13	S5R43	TSCMRB51	WT9316G108
MC14A35	MSHXLCST313	S6R43	TSDC49	WT9532G108
MC14N33	MSHXLCM111	S9R43	TSF153	WT9SG108
MC14NRB33	MSHXLCM211	SC161	TSF1RBN53	
MC14ARB35	MSHXLCM311	SC279	TSF253	
	MTP214	SC3R45	15F2KBN53	
MCCB769	MTP214 MTS214	SC3R45 SCS12113	TSF2RBN53 TSHD49	
MCCB769 MD1041	MTS214	SCS12113	TSHD49	
MCCB741 MD1041 MD1241	MTS214 MTT2514	SCS12113 SCSRC176	TSHD49 TSHDRB49	
MCCB769 MD1041 MD1241 MS1281	MTS214 MTT2514 MV1288	SCS12113	TSHD49	
MCCB7	MTS214 MTT2514	SCS12113 SCSRC176 SCSRC1RB76 SD152	TSHD49 TSHDRB50 TSMDRB50	
MCCB7	MTS214 MTT2514 MV1288 MV12RB88	SCS12113 SCSRC176 SCSRC1RB76	TSHD49 TSHDRB49 TSMD50	













www.malcotools.com













Malco TOOL BOOK

TOOLS, FASTENERS, AND DRIVERS

Malco Tools, Inc. 14080 State Hwy 55 NW Annandale, MN 55302-0400, U.S.A. ©2025

www.malcotools.com













YOUR AUTHORIZED MALCO DEALER

