




PART NUMBER	NO. OF PORTS	LENGTH
PL1/0-2	2	1.35
PL1/0-3	3	2.00
PL1/0-4	4	2.65
PL1/0-5	5	3.30
PL1/0-6	6	3.95
PL1/0-8	8	5.25
PL1/0-10	10	6.55
PL1/0-12	12	7.85
PL1/0-14	14	9.15

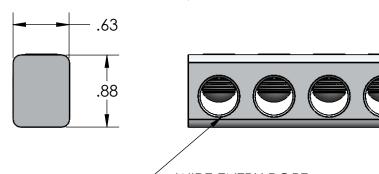

─WIRE ENTRY PORT
WIRE RANGE: 1/0 - #14 AWG
PRE-FILLED W/ OXIDE INHIBITOR

CONTACT NSi FOR SALES @ 800.321.5847

3/16 INTERNAL HEX PRESSURE SCREW

LENGTH

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- 2. CONNECTOR CHROMATED FOR INCREASED CORROSION RESISTANCE.
- 3. UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- 4. DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.

