


**FEATURES:**

1. Material: Tin Plated Aluminum
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact conductor.
5. Dual rated AL9CU.
6. Expanded wire range when installed with dieless NSi compression tool (N12ID).
7. Dimensions are for reference only, tolerance is +/- .06".


# AL-N-NT Series: AL600N-NT



|            |            |
|------------|------------|
| PROGRAM:   | SOLIDWORKS |
| UPDATED:   | 7/2022     |
| SALES REV: | A          |
| SIZE:      | B (11x17)  |

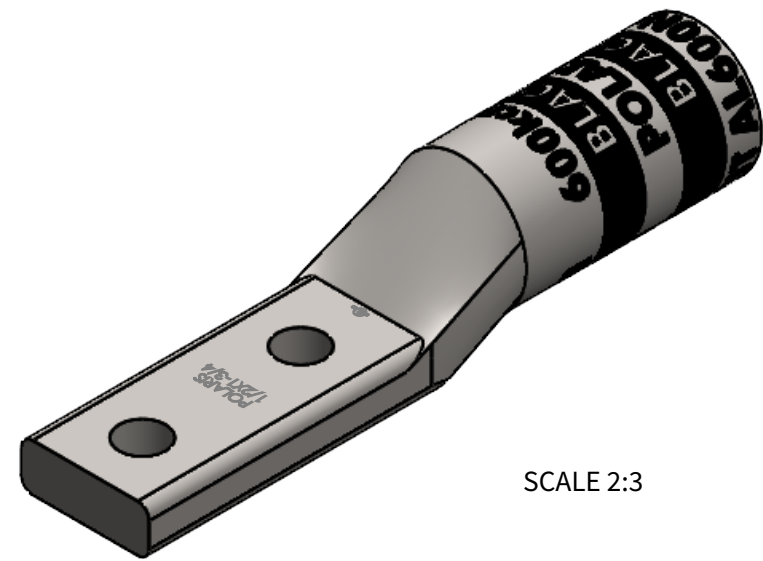

SCALE 2:3

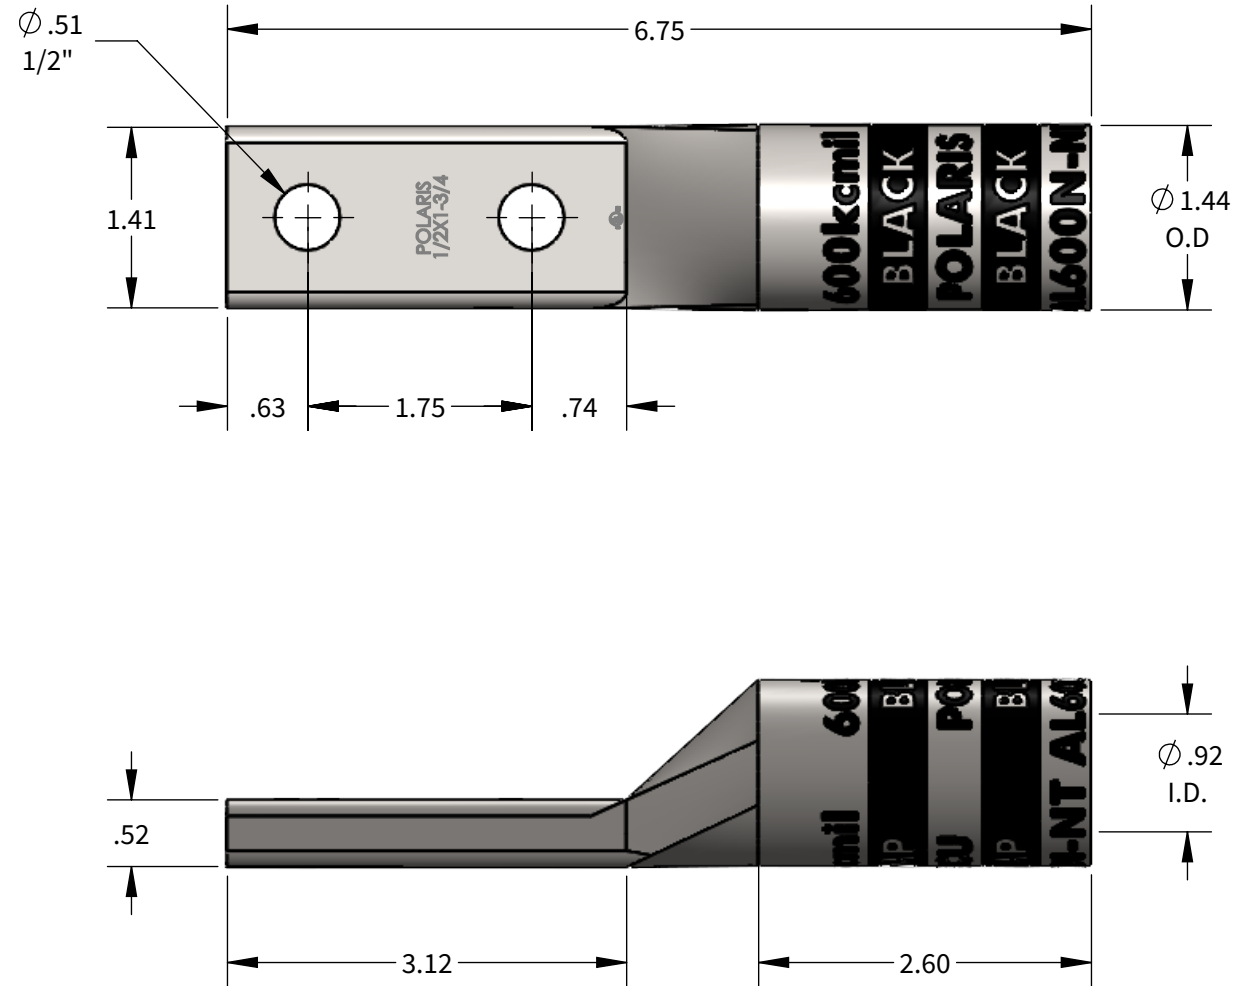

ALUMINUM COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS)

| WIRE SIZE | STRIP LENGTH | DIE COLOR | ALUMINUM COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS) |              |              |                     |
|-----------|--------------|-----------|---|--------------|--------------|---------------------|
|           |              |           | NSI   | GREENLEE     | BURNDY       |                     |
|           |              |           | EXPANDED WIRE RANGE W/ N12ID                                    | N1240 SERIES | 1240 SERIES  | Y-35, Y750, PAT 750 |
| 600kcmil  | 2-11/16"     | BLACK     | 600kcmil-250kcmil   | KA12-600 (2) | KA12-600 (2) | U36ART (2)          |

