


FEATURES:

- Multiple combination connectors are made from aluminum and are tin-plated for low contact resistance.
- Suitable for use with both copper and aluminum conductors.
- Each connector contains a combination of 1/0-14 awg and 6-14 awg wire holes.
- Economical and compact due to innovative design and hole spacing.
- Dual rated for use with aluminum and copper cables.

PROGRAM:	SOLIDWORKS
UPDATED:	10/2024
SALES REV:	A
SIZE:	B (11x17)

NEUTRAL CONNECTORS: 2024 SERIES

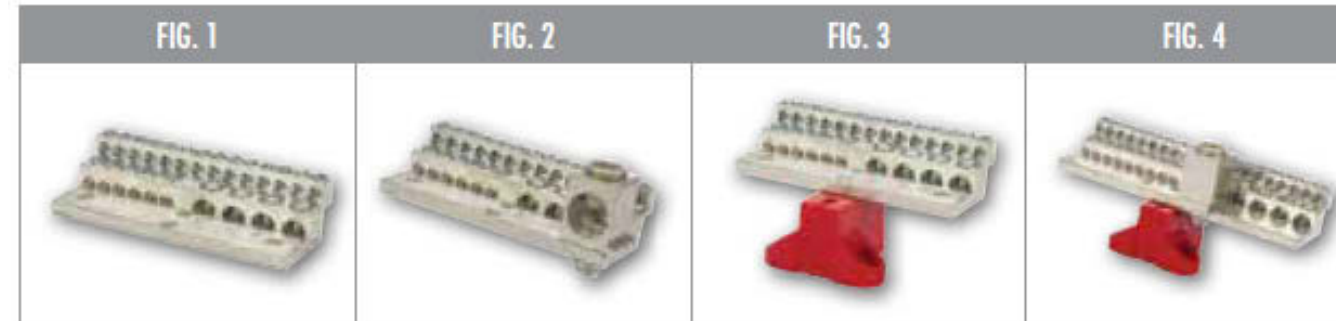

CAT. NO.	FIG. NO.	NO. OF 4-14 AWG CIRCUITS	NO. OF 1/0-14 AWG CIRCUITS	MAIN LUG SIZE	MOUNTING BASE	LENGTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	STD. CTN. QTY.
2024	1	20	4	NONE	NO	4.332	1.025	1.687	1
2024M	2	20	4	350-6	No	4.457	1.525	1.687	1
2024MB	4	20	4	350-6	Yes	4.457	2.900	2.437	1
2030	1	26	4	None	No	5.244	1.025	1.687	1
2030M	2	26	4	350-6	No	5.369	1.525	1.687	1
2030B	3	26	4	None	Yes	5.244	2.400	2.437	1
2030MB	4	26	4	350-6	Yes	5.369	2.900	2.437	1
2036	1	32	4	None	No	6.156	1.025	1.687	1
2036M	2	32	4	350-6	No	6.281	1.525	1.687	1
2036MB	4	32	4	350-6	Yes	6.281	2.900	2.437	1
2042M	2	38	4	350-6	No	7.193	1.525	1.687	1
2042MB	4	38	4	350-6	Yes	7.193	2.900	2.437	1