

zinwave 5000

Public Safety DAS

UL2524 Certified

NEMA 4 & UL50E rated enclosure. Protects rack-mounted equipment from water and dust ingress.

- Integrated alarm annunciator, indicating:
 - Loss of normal AC power supply.
 - System battery charging failure.
 - Low battery at 70% reduction of OC.
- Compatible with any standard 19" rack.
- Battery backup management system.
- NEMA 4 and UL50E certified.
- 12 & 24 hour battery backup options.



Enclosure



Enclosure with components




Battery Enclosure



Optical Remote Unit

Enclosure Specifications	
Model	790001
Color	Powder Coat Matte Red
Material	CRS Sheet Metal
Dimensions	19.52 x 34.72 x 25.22 (in.) / 496 x 882 x 640.6 (mm)
Weight	113.2 (lbs.) / 51.3 (kg)

Component SKUs	
Primary Hub	305-0001
Secondary Hub(s)	305-1004
Optical Remote Unit	305-1007-R
Optical Remote Unit, IP65 Enclosure	305-0008-R
Battery Enclosure w/LiFePO4 Battery	791001 / 792001 / 793001

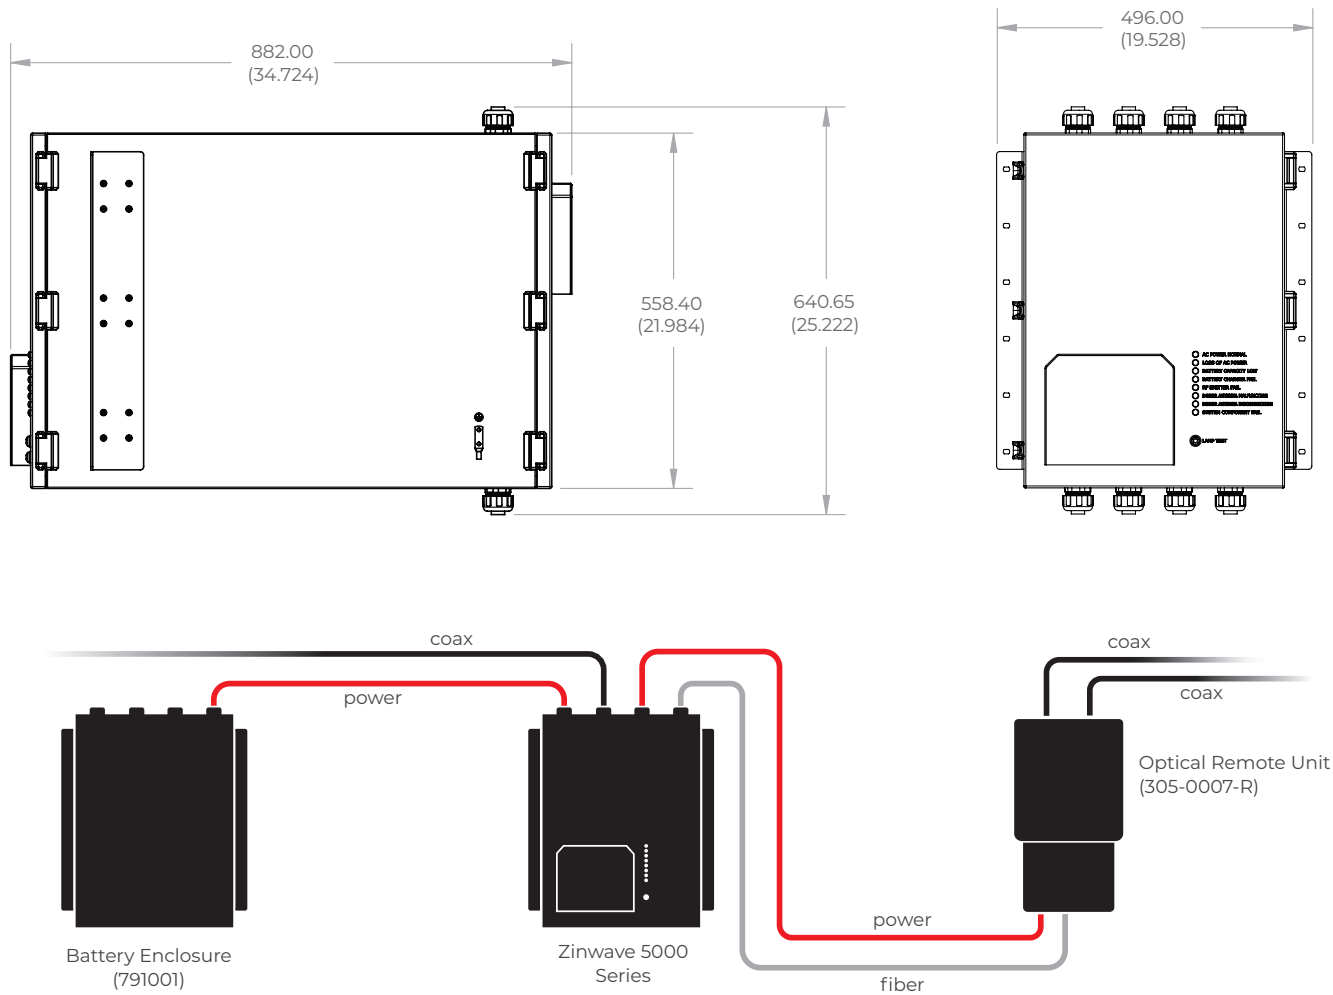

3 Year Warranty from Purchase

305-0001 Primary Hub  8 10005 96446 3	305-0004 Secondary Hub  8 10005 96471 5	305-0007 Optical Remote Unit  8 10005 96653 5	791001 Optical Remote Unit, IP65 Enclosure  8 10005 96615 3
792001 Optical Remote Unit, IP65 Enclosure  8 10005 96616 0	793001 Optical Remote Unit, IP65 Enclosure  8 10005 96617 7		