

3.5"

45381 DOUBLE REGRESSED GIMBAL

PROJECT:

TYPE:

DATE:

NOTES:



2700K . 3000K . 3500K . 4000K . 5000K



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: \varnothing 7 1/4" x 3 3/4".
- Fixture: \varnothing 7 7/8" x 3 1/4".

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

LIGHT MODULE

- 1 x 24W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 1273 lm | 1360 lm | 1495 lm | 1555 lm | 1526lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH
45381-027	Black
45381-010	White

ACCESSORIES

45611-018
60"
2 pin Connector

45383-014
2LT/3LT
NEW CONSTRUCTION
PLATE
07 3/8"x 3 3/4"
010 13/16"x 3 3/4"
16 1/4"x 11 7/8"



47205-017
15W REMOTE
EMERGENCY
BACKUP BATTERY



NO IC BOX
REQUIRED

PHOTOMETRICS

Imperial

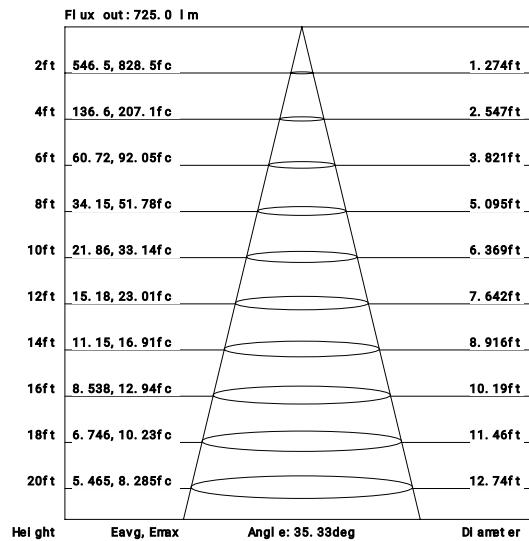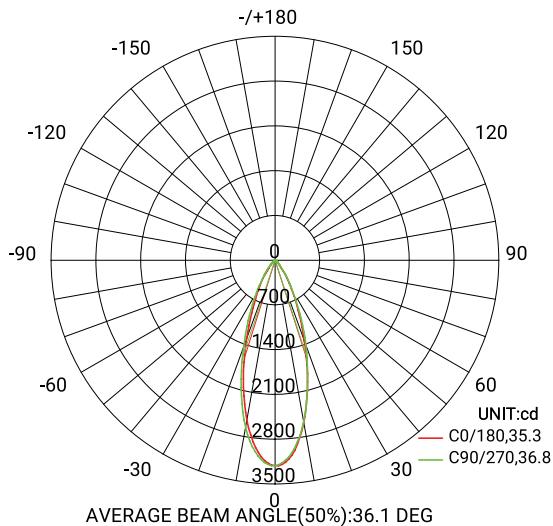

Metrics

