

FEATURES:

1. Material: TiN Plated CU
2. UL listed for U.S. & Canada.
3. Wire connector rated for 35Kv max.
4. Class B/C compressed, concentric, and compact copper conductor.
5. Expanded wire range when installed with dieless NSi compression tool (N12ID).
6. Dimensions are for reference only.



SC Series: SC-600



PROGRAM:	SOLIDWORKS
UPDATED:	9/2022
SALES REV:	A
SIZE:	B (11x17)



SCALE 2:1

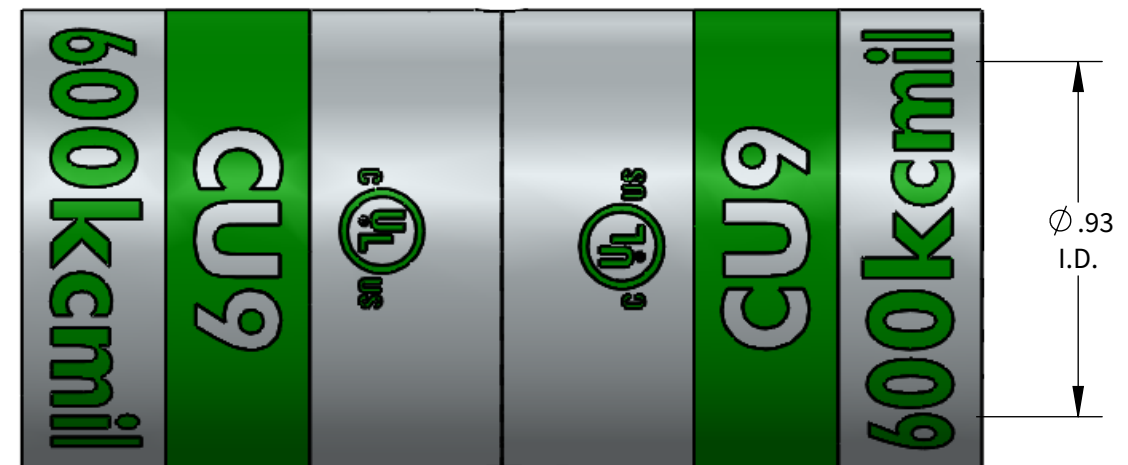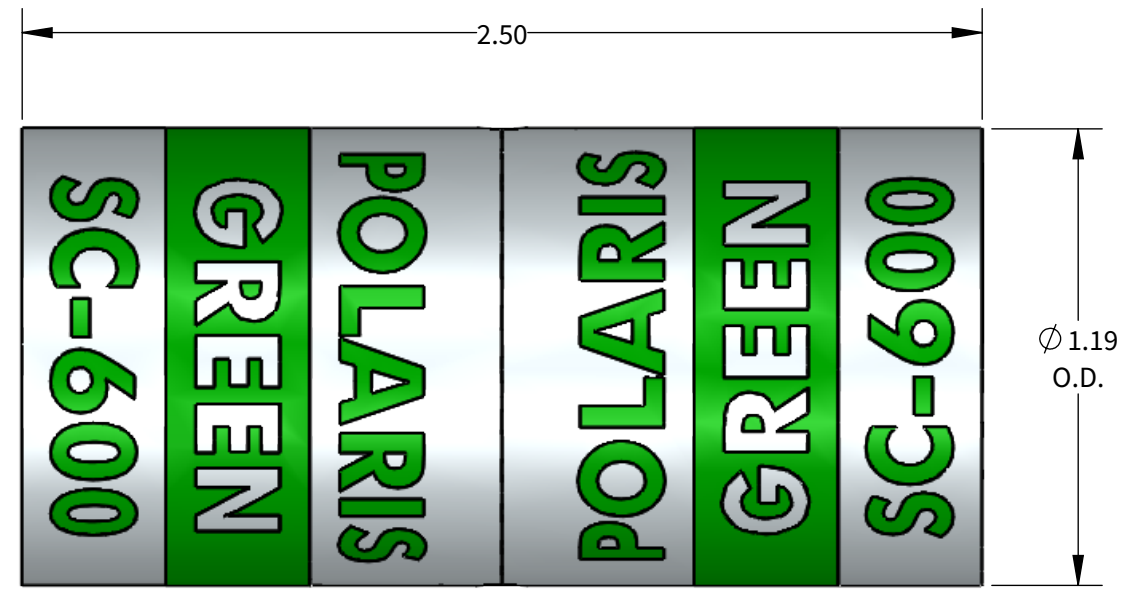

COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)

WIRE SIZE	STRIP LENGTH	DIE COLOR	EXPANDED WIRE RANGE W/N12ID	COPPER COMPRESSION CONNECTOR TOOL AND DIE CHART (# OF CRIMPS PER SIDE)									
				NSI			GREENLEE & ILSCO		BURNDY	T&B	HUSKIE		
				N1240 SERIES	NSI-12	NSI-12	GREENLEE 1240 SERIES ILSCO ILC-12, ILC-15		Y-35, Y750, PAT 750	TBM-15, TBM-14M	EP510C		
600kcmil	1-7/16"	GREEN	600kcmil-250kcmil	KC12-600 (1)	CD19 (2)	HT41BM (2)	KC12-600 (1)	ILD-16 (2)	U36RT (2)	15536-CK (2)	HT41BM (2)	CD19 (2)	

