


POLYKEN®

626-35

Foilastic® Roof Flashing Tape

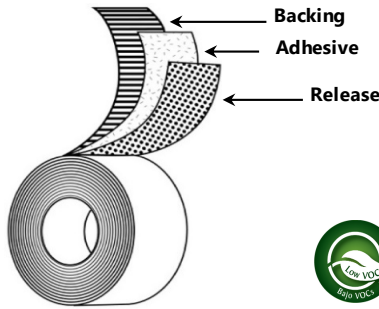

Backing:	2 mil Aluminum Foil
Adhesive:	Butyl Rubber
Liner:	LDPE Film
Colors:	Aluminum
Specifications:	AAMA-711-22, ASTM E2112 15 Year Limited Warranty
Standard Sizes:	48mm x 15M, 3in x 50ft, 4in x 50ft, 6in x 50ft, 9" x 50ft, 36" x 50ft, 12" x 50ft

Applications

- Flashing hip, ridge, and penetration details on concrete tile roofs
- Sealing gutters, roof valleys and eaves, chimneys and vents, and rooftop duct systems
- Deck-to-wall joints
- Sheet metal repairs on mobile homes, trailers
- Sealing other detail areas against water and air penetration

Features

- 2 mil Aluminum Foil Backing
- Premium Butyl Rubber Adhesive
- LDPE Liner

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for indefinite outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Excellent all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Easy to use
- Moisture resistant

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	35.0 mils	0.889 mm	ASTM D-1000
Adhesion to Aluminum	323 oz/in	35.38 N/cm	ASTM D3330 Method F
Adhesion to Plywood	138 oz/in	15.06 N/cm	ASTM D3330 Method F
Adhesion to OSB	115 oz/in	12.61 N/cm	ASTM D3330 Method F
Adhesion to PVC	40 oz/in	4.38 N/cm	ASTM D3330 Method F
Adhesion to Backing	126 oz/in	13.83 N/cm	ASTM D3330 Method F
Tensile Strength	24 lb/in	42.38 N/cm	ASTM D3759 Procedure A
Installation Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH

Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.



2320 Bowling Green Road | Franklin, KY 42134

1-800-343-7878 Fax 1-800-328-4822

www.vybond.com

3/16/25