


**Medical-Grade Double-Coated Tape**

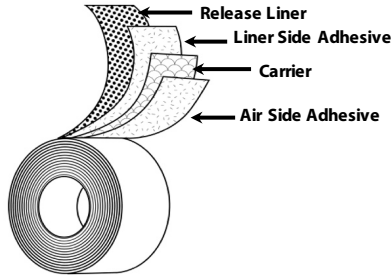

**Liner:** 80# SCK

**Liner Side Adhesive:** Rubber (M149)

**Backing/Carrier:** 0.5 mil PET Film

**Air Side Adhesive:** Rubber (M149)

**Applications**

- Bonding to a wide variety of PU and PE foams, felt, cork, rubber, and sponge materials
- Medical device attachment and assembly
- Sensor components

**Features**

**Benefits**

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>• Rubber Adhesive</li> <li>• Polyester Film Carrier</li> <li>• 80# SCK Liner</li> </ul> | <ul style="list-style-type: none"> <li>• Offers exceptionally high tack and high peel</li> <li>• Excellent shear properties</li> <li>• Excellent bond for medium and high surface energy materials</li> <li>• Bonds well to foams and rough/porous materials</li> <li>• Good bond to LSE substrates</li> <li>• Support for aid in processing and application</li> <li>• Conformable and good dimensional stability</li> <li>• Excellent processing and die-cutting stability</li> </ul> |
|--|---|

**Typical Test Values**

	Standard UOM	Metric UOM	Test Method
<b>Overall Thickness (w/liner)</b>	8.4 mils	0.213 mm	PSTC 133
<b>Air-Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Carrier Thickness</b>	0.5 mils	0.013 mm	PSTC 133
<b>Liner Side Adhesive Thickness</b>	1.2 mils	0.030 mm	PSTC 133
<b>Liner Thickness</b>	4.7 mils	0.119 mm	PSTC 133
<b>Adhesion to Steel (Air Side)</b>	158 oz/in	17.29 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Steel (Liner Side)</b>	152 oz/in	16.63 N/cm	PSTC 101 Mod - 1 mil PET
<b>Shear Strength</b>	>7 Days		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	30 to 150 °F	-1 to 66 °C	

**Product Safety**

The base adhesives in this medical product is currently undergoing testing accordance with ISO 10993 for cytotoxicity.

In accordance with FDA cGMP requirements, Berry reminds the customer that ultimate fitness for use must be determined by the manufacturer of the finished device.

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.