

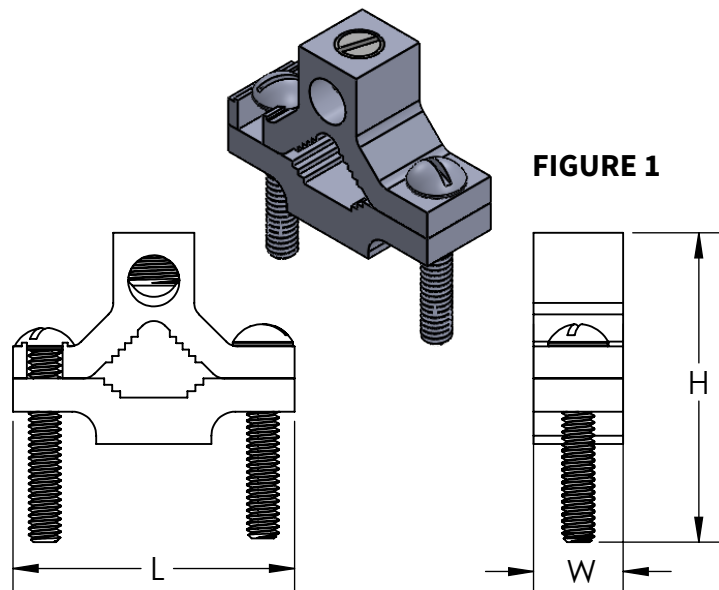


FIGURE 1

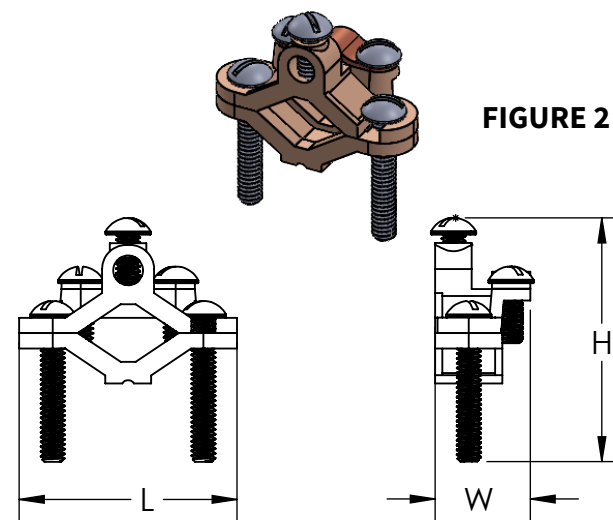


FIGURE 2

PART #	MATERIAL	FIGURE	CERTIFICATION	GROUND WIRE RANGE	PIPE SIZE (IN)	LENGTH (L) (IN)	WIDTH (W) (IN)	HEIGHT (H) (IN)
GCA-1	Aluminum	1	UL	1/0 STR - #14 SOL	1/2 - 1	2.31	0.69	2.42
GCA-2	Aluminum	1	UL	250 STR - #6 SOL	1 1/4 - 2	3.76	0.81	4.11
GCA-4	Aluminum	1	UL	250 STR - #6 SOL	2 1/2 - 4	6.31	1.02	6.25
GZ-1	Zinc	1	UL	#2 STR - #8 SOL	1/2 - 1	2.24	0.64	2.39
GZB-1	Brass plated Zinc	1	-	#2 STR - #8 SOL	1/2 - 1	2.24	0.64	2.39
G-20	Bronze	2	UL	#4 STR - #8 SOL	1/2 - 1	2.27	0.99	2.46
G-66	Bronze	2	UL	#4 STR - #8 SOL	1 1/4 - 2	3.61	0.98	3.25

FEATURES:

- GCA ground clamps are dual rated for Aluminum or Copper conductors
- GZ and G ground clamps are only rated for copper conductors
- Pre-assembled with zinc-plated steel screws
- Class B/C and solid conductor only
- UL467 listed, Grounding and Bonding

GROUND WIRE TORQUES

WIRE RANGE	TORQUE
<= #10 AWG	35 IN*LB
#8 AWG	40 IN*LB
#6 - #4 AWG	45 IN*LB
#4 - 3/0 AWG	50 IN*LB