





REMOVABLE ACCESS PLUG

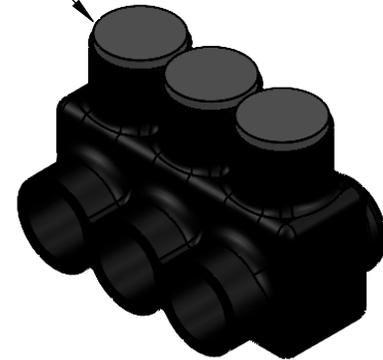

WIRE ENTRY PORT
 WIRE RANGE: 500KCMIL - #4 AWG
 PRE-FILLED W/ OXIDE INHIBITOR

IPL500-3 SHOWN

PART NUMBER	NO. OF PORTS	LENGTH
IPL500-3	3	3.96
IPL500-4	4	5.11
IPL500-5	5	6.25
IPL500-6	6	7.40
IPL500-7	7	8.59
IPL500-8	8	9.69
IPL500-10	10	12.11
IPL500-12	12	14.53
IPL500-14	14	16.69
IPL500-15	15	17.90
IPL500-20	20	23.56

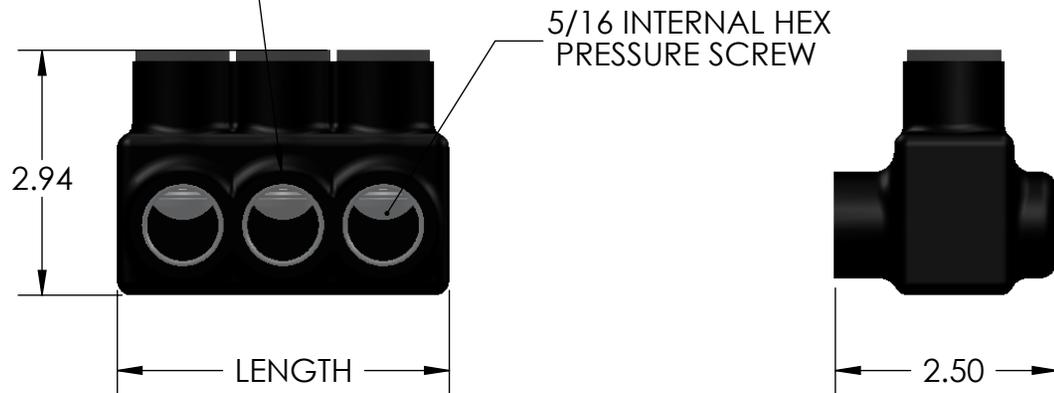

CONTACT NSi FOR SALES @ 800.321.5847

NOTES:

- CONNECTOR MANUFACTURED FROM 6061-T6 ALUMINUM ALLOY.
- UL LISTED PER UL486A/B SPECIFICATIONS FOR 600V.
- DUAL RATED FOR 90°C COPPER AND/OR ALUMINUM CONDUCTOR.
- COLD TEMPERATURE RATED TO -45°C.
- HIGH DIELECTRIC STRENGTH INSULATION IS ABRASION, CHEMICAL AND UV RESISTANT.

		POLARIS SALES . CO . INC					
PROPRIETARY AND CONFIDENTIAL		11625 PROSPEROUS DRIVE ODESSA, FL 33556					
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF POLARIS SALES CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF POLARIS SALES CO. INC. IS PROHIBITED.		TITLE: INSULATED 500 CONNECTOR					
<table border="1"> <tr> <td style="width: 50px;">NAME</td> <td style="width: 50px;">DATE</td> </tr> <tr> <td>DRAWN BY S.PARRY</td> <td>06/2012</td> </tr> </table>		NAME	DATE	DRAWN BY S.PARRY	06/2012	DWG. NO. IPL500-	
NAME	DATE						
DRAWN BY S.PARRY	06/2012						
MATERIAL: N/A		SCALE: N/A					
		SHEET: 1 OF 1					