


NEBO[®]

ASSIST™ 800 JUMP STARTER

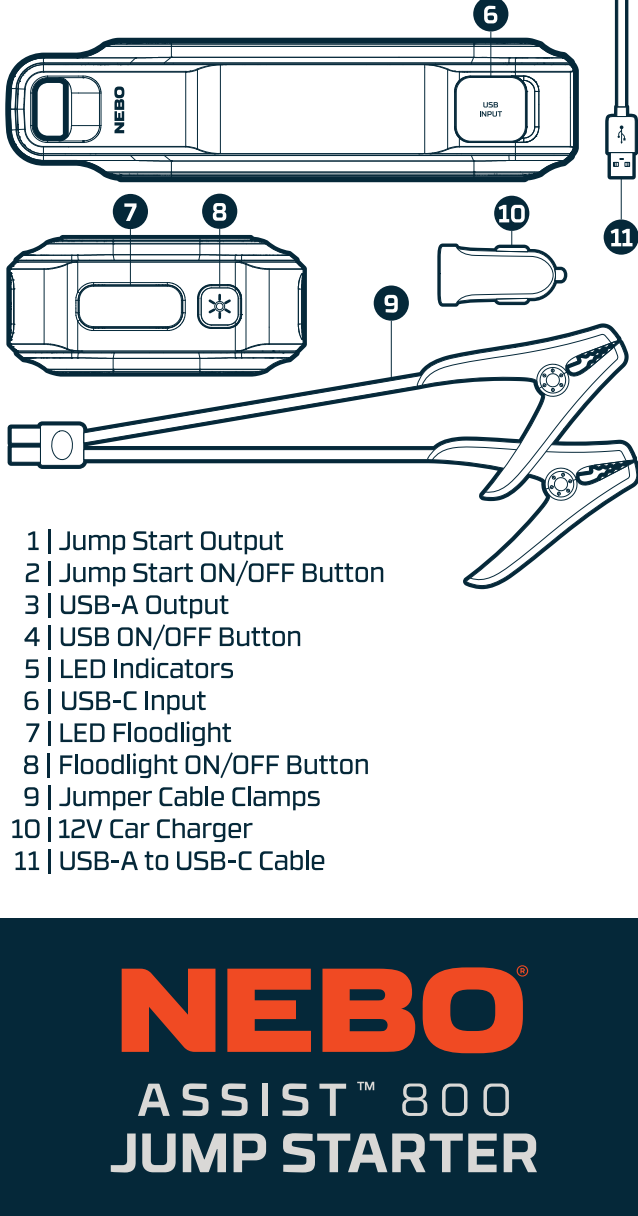

- 1 | Jump Start Output
- 2 | Jump Start ON/OFF Button
- 3 | USB-A Output
- 4 | USB ON/OFF Button
- 5 | LED Indicators
- 6 | USB-C Input
- 7 | LED Floodlight
- 8 | Floodlight ON/OFF Button
- 9 | Jumper Cable Clamps
- 10 | 12V Car Charger
- 11 | USB-A to USB-C Cable

NEBO[®]

ASSIST™ 800 JUMP STARTER

SPECIFICATIONS

Battery Cells.....	2700mAh
Battery Capacity.....	29,970mWh
USB-C Input/Output.....	5V/2A
USB-A Outputs.....	5V/2.4A
Jump Start Output.....	12VDC / 324A Peak
Dimensions.....	7.2 x 3.8 x 1.6 inches
Weight.....	1.14 lbs
Operating Temperature.....	32°F - 113°F (0 - 45°C)
Discharge Temperature.....	14°F - 122°F (-10 - 50°C)


SAFETY PRECAUTIONS / MOVING AND STORAGE INSTRUCTIONS

- Read all instructions before using the product.
- When used correctly, lithium-ion rechargeable batteries provide a safe and dependable source of portable power. However, if they are misused or abused, this may result in leakage, burns, fire or explosion, causing personal injury or damage to other devices.
- Misusing or incorrectly connecting your NEBO Assist 800 Jump Starter may cause electric shock to users and damage equipment.
- Keep your NEBO Assist 800 Jump Starter dry and away from moisture and corrosive materials. The NEBO Assist 800 Jump Starter should not be used near water or wet areas such as bathtubs, showers, bathrooms, sinks, swimming pools or basements.
- Do not expose your NEBO Assist 800 Jump Starter to moisture, water, rain, or snow.
- Keep your NEBO Assist 800 Jump Starter away from heat sources, including open flames, radiators, stoves, ovens, and any other devices that produce heat.
- The lithium-ion rechargeable battery used in this charging device may present a risk of fire or chemical burn if mistreated. Do not expose to fire or excessive temperature. Do not expose to heat above 212°F (100°C) or incinerate.
- In the unlikely event of leakage or explosion use sand or a chemical fire extinguisher.
- Your NEBO Assist 800 Jump Starter may become warm under extended high power operation. Do not cover, wrap, or otherwise restrict the NEBO Assist 800 Jump Starter during operation.
- Do not disassemble your NEBO Assist 800 Jump Starter. There are no user-service-able parts inside. Incorrect reassembly may result in shock or fire hazard.
- Do not drop or subject to strong impacts. Do not operate your NEBO Assist 800 Jump Starter if it has received a sharp blow, or has otherwise been damaged in any way.
- Do not puncture, crush or subject to mechanical shock.
- The NEBO Assist 800 Jump Starter, along with its accessories, are not toys and should be kept away from children.
- Make sure the jumper cables are fully plugged into the jump start output before trying to jump start your vehicle.
- Do not touch red (positive) and black (negative) jumper clamps together at any point.
- Do not insert any foreign object into the ports or openings of your NEBO Assist 800 Jump Starter.
- Do not clean your NEBO Assist 800 Jump Starter with harsh chemicals, soaps or detergents. Just wipe the case with a soft cloth.
- Make sure the NEBO Assist 800 Jump Starter's charging ports do not become contaminated with lint or other debris. Use a canned-air type of product periodically to ensure that the port openings are clear.
- Batteries should be recycled or disposed of as per state and local guidelines.

CHARGING YOUR NEBO ASSIST™ 800 JUMP STARTER


CHARGING IN YOUR VEHICLE:

1. Connect the USB-A Cable end to the 12V Car Charger (included), and plug the USB-C end into the USB-C Port, located on the back of your Assist 800 Jump Starter.
2. Plug the 12V Car Charger into the vehicles DC output (cigarette lighter).
3. The USB-C Port, port will begin to charge automatically when a device is detected.
4. When fully charged, the LCD screen will indicate 100% and the LED indicators will be solid green(This could take up to 4 hours).
5. Disconnect cable and power off your Assist 800 Jump Starter.

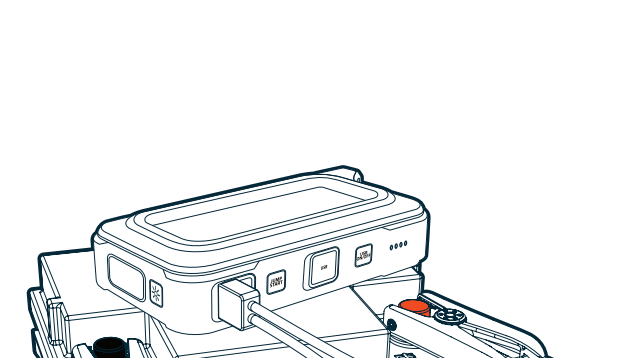

USING THE FLOODLIGHT

1. Floodlight ON/OFF Button **once** = ON White Floodlight
2. Floodlight ON/OFF Button **twice** = ON Red Floodlight
3. Floodlight ON/OFF Button **three times** = ON Emergency Red S.O.S.
4. Floodlight ON/OFF Button **four times** = OFF

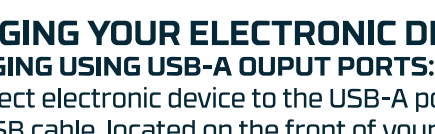


NOTE: Do not look directly into the LED floodlight.

JUMP STARTING YOUR VEHICLE

1. Plug the jumper cables into the jump-start output.
2. Attach the jumper-cable clamps to the vehicle battery.
 - Red clamp on positive terminal (+)
 - Black clamp on negative terminal (-)
3. Press the "Jump Start" button and wait for a solid green light.
4. Start your vehicle.

NOTE: Do not touch red (positive) and black (negative) clamps together. Allow 15 seconds between each jump-start attempt. If your vehicle does not start after three attempts, consult a certified mechanic.

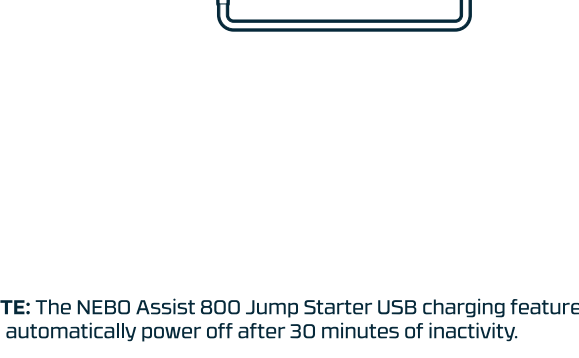

CHARGING YOUR ELECTRONIC DEVICES

CHARGING USING USB-A OUTPUT PORTS:

1. Connect electronic device to the USB-A port via an USB cable, located on the front of your NEBO Assist 800 Jump Starter (FIG. 1).
2. Turn on the USB ON/OFF Button to begin charging your device.
3. Disconnect cable and power off your NEBO Assist 800 Jump Starter.



NOTE: The NEBO Assist 800 Jump Starter USB charging feature will automatically power off after 30 minutes of inactivity.

NEBO[®]

ASSIST™ 800 JUMP STARTER

QUICK START GUIDE

For more information, detailed video instructions, and warranty registration, simply scan the QR code or visit NEBOpower.com.



IMPORTANT: Fully charge your NEBO Assist™ 800 Jump Starter before using it for the first time.