


THE SIMPLE AND RELIABLE CHOICE

Pass-through ports and a simple functional design make uninsulated connectors a good choice for heavy-duty applications. The corrosion-resistant aluminum body features hex screws to tighten connections.

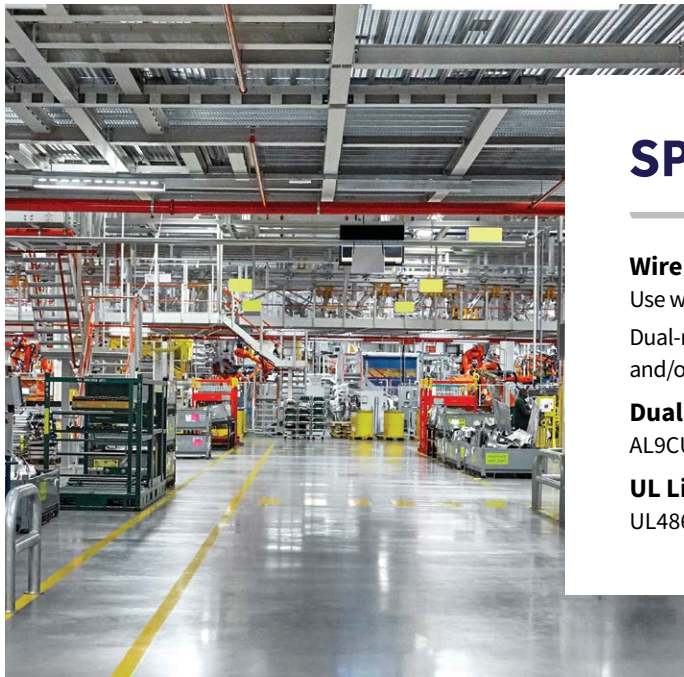

SPECIFICATIONS

Wire Type

Use with Class B and C conductors
Dual-rated for use with copper
and/or aluminum conductors.

Dual Rated

AL9CU, 90C

UL Listed

UL486A/B for 35kV

Location

Dry locations only

Material

6061-T6 aluminum alloy

WIRE CONNECTOR



PASS-THROUGH ENTRY

CATALOG NUMBER	WIRE RANGE (Kcmil/AWG)	PORTS	LENGTH (IN.)	WIDTH (IN.)	HEIGHT (IN.)	MAX AMP (ALUM-COPP)	HEX KEY (IN.)
PL4-6	4 - 14	6	2.57	0.50	0.63	75-95	1/8
PL1/0-4	1/0 - 14	4	2.65	0.63	0.88	135-170	3/16
PL1/0-6		6	3.95	0.63	0.88	135-170	3/16
PL1/0-8		8	5.25	0.63	0.88	135-170	3/16
PL3/0-6		3/0 - 6	6	4.72	0.69	0.94	175-225
PL3/0-8	8		6.28	0.69	0.94	175-225	1/4
PL250-6	250 - 6	6	5.27	0.88	1.13	615-790	5/16
PL250-8		8	6.99	0.88	1.13	820-1053	5/16
PL500-10	500 - 4	10	11.73	1.13	1.63	1262-1612	5/16

Scan for full
installation
instructions

