

3.5"

45368 ROUND FIXED DOWNLIGHT



ADJUSTABLE  
CCT

2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase or 0-10V dimming power supply.

## SPECIFICATIONS

### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

### DIMENSIONS

- Cut hole: Ø3 3/4".
- Fixture: Ø4 3/8" x 3 1/4"H.

### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC/ELV or 0-10V dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

### LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 702 lm | 750 lm | 818 lm | 859 lm | 854 lm

### CERTIFICATIONS



## ORDERING GUIDE

MODEL	FINISH	DIMMING
45368-028	Black	Triac/ELV
45368-011	White	Triac/ELV
45368-011-0	White	0-10V

## ACCESSORIES



45372-018  
NEW CONSTRUCTION  
PLATE  
Mounting kit includes bars  
14" x 7 3/4"  
Ø3 3/4"



45517-013  
NEW CONSTRUCTION  
SMASH PLATE  
13 1/4" x 6 1/2"  
Ø3 3/4"



47205-017  
15W REMOTE  
EMERGENCY  
BACKUP BATTERY



NO IC BOX  
REQUIRED

PROJECT:

---

TYPE:

---

DATE:


---

NOTES:

Ø3 3/4"	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
Ø3 3/4"	12W	Up to 859	CCT Selectable	TRIAC/ELV or 0-10V	90+	38°	NO





### PRODUCT DIMENSIONS

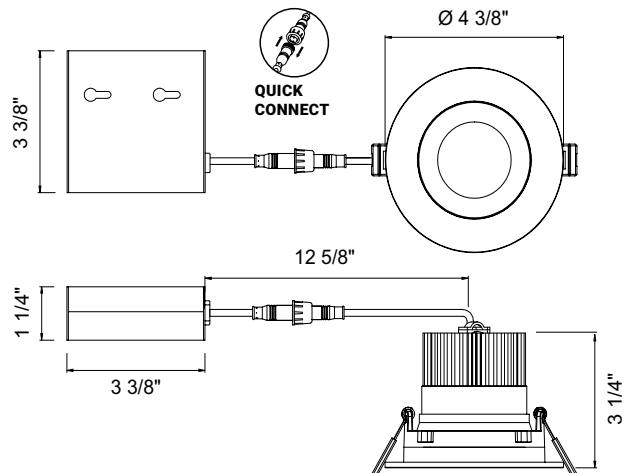



## PHOTOMETRICS

## Imperial

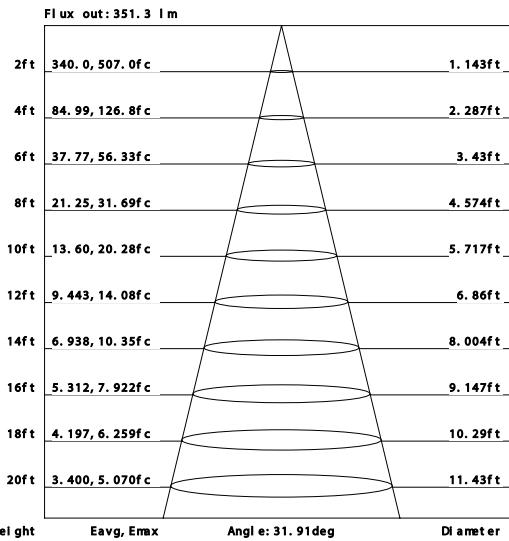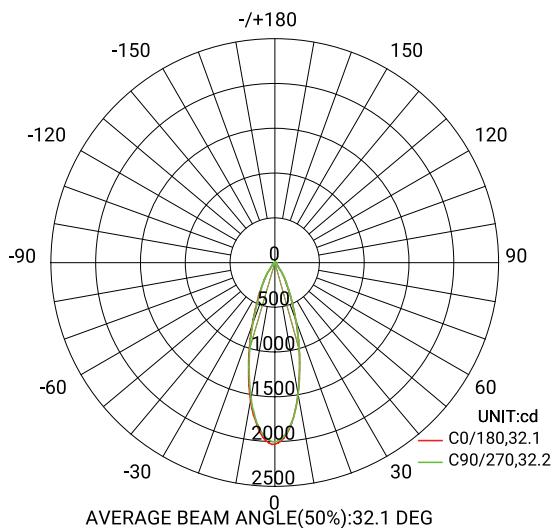

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## Metrics

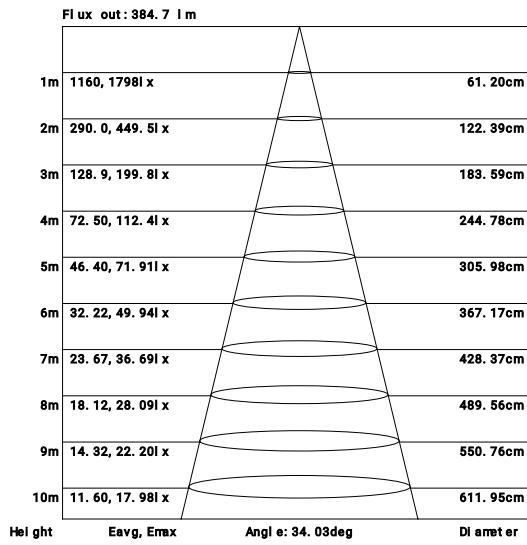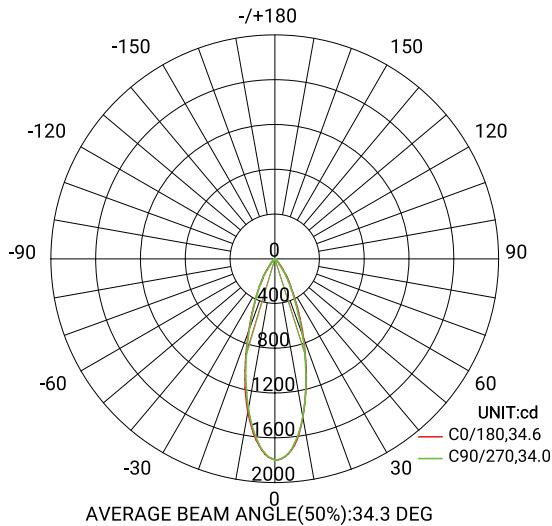

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.