

PROJECT: _____

TYPE: _____

DATE: _____

NOTES: _____

6"

45377 SLIM ROUND REGRESSED DOWNLIGHT



2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

SPECIFICATIONS

LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

DIMENSIONS

- Cut hole: $\phi 6 \frac{1}{4}"$.
- Fixture: $\phi 6 \frac{7}{8}" \times 1 \frac{1}{4}"$ H.

ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~-104°F)(-20°C~-40°C).

LIGHT MODULE

- 1 x 12W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 110 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 820 lm | 884 lm | 924 lm | 938 lm | 923 lm

CERTIFICATIONS



ORDERING GUIDE

MODEL	FINISH
45377-013	White

	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
 $\phi 6 \frac{1}{4}"$	12W	Up to 938	CCT Selectable	TRIAC/ELV	90+	110°	NO

Driver Box included




FINISHES



013- White

PRODUCT DIMENSIONS

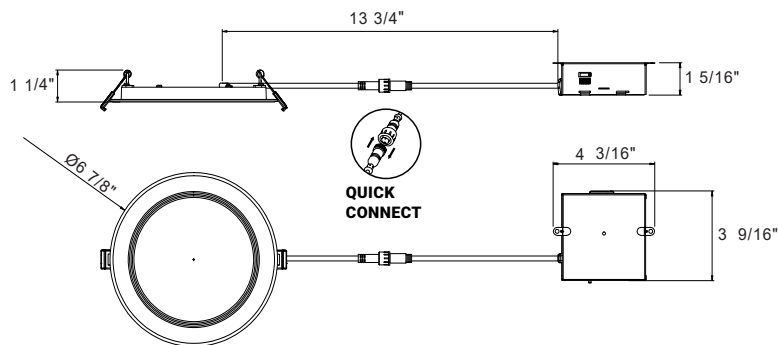

ACCESSORIES



45612-015
60"
3 pin Connector



45380-013
NEW CONSTRUCTION
SMASH PLATE
17 1/4" x 8 3/8"
 $\phi 6 \frac{1}{4}"$



47205-017
15W REMOTE
EMERGENCY
BACKUP BATTERY



NO IC BOX
REQUIRED



www.eurofase.com

Tel: 905.695.2055 Fax: 905.695.2056
Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390

All features, functionality and other product specifications are subject to change without notice.

PHOTOMETRICS

Imperial

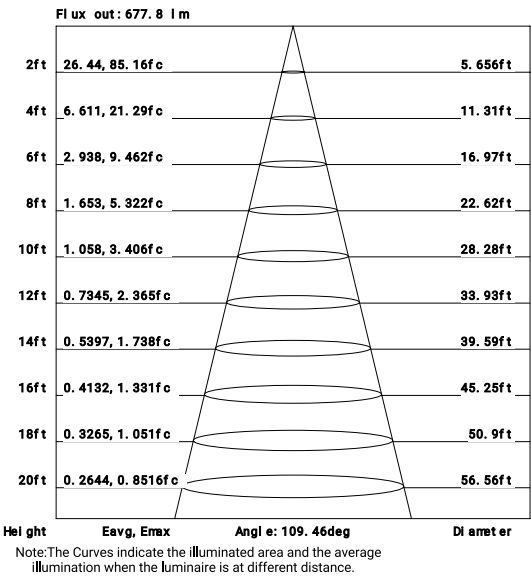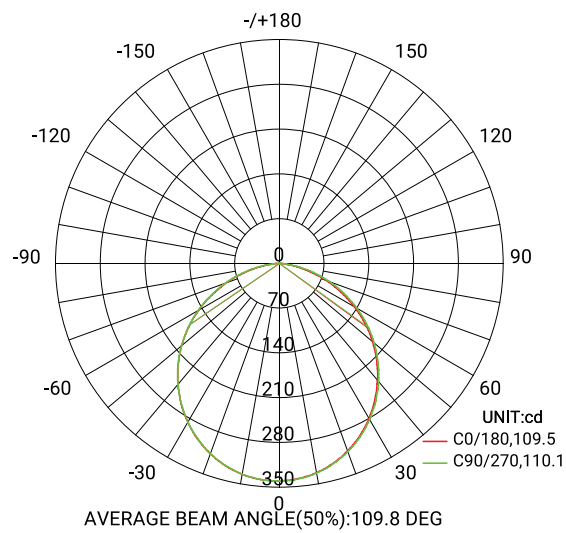

Metrics

