


P1: M-062A

P2: M-063A


Customer No.: No.:1



PACKING: 10PCS IN A POLYBAG




PACKING A: <3FT

PE



PACKING B: >=3FT


PE

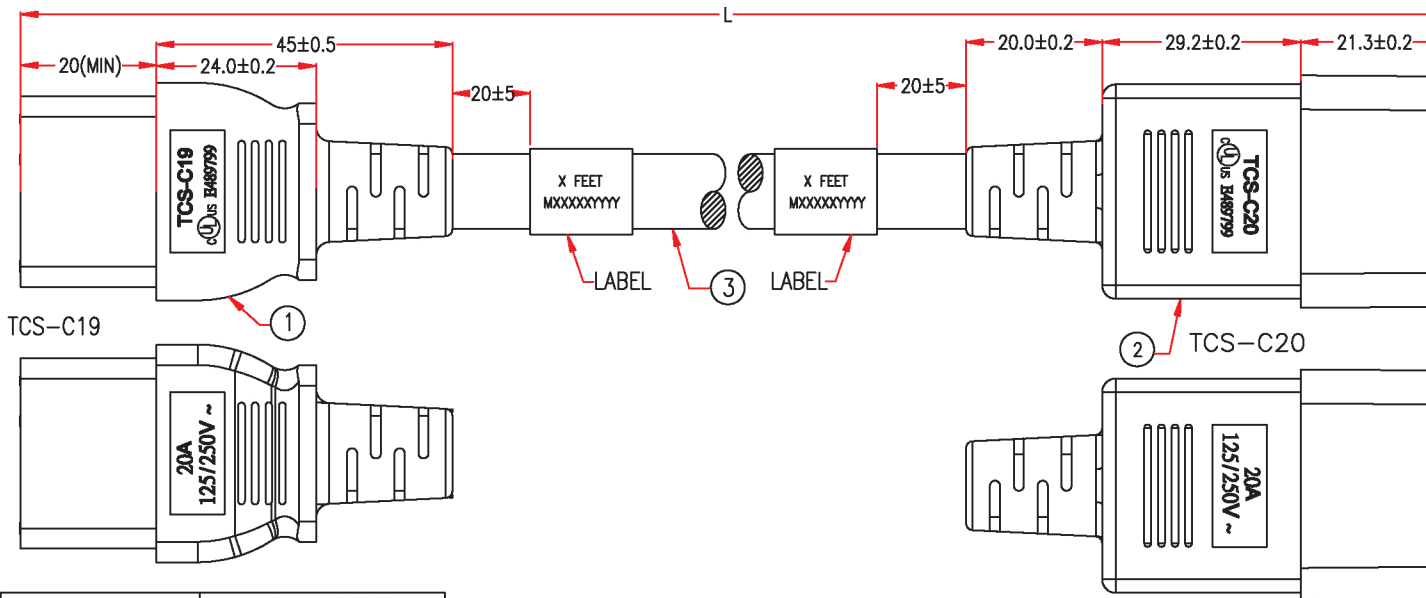

TCS-C19

TCS-C20

P/N	JACKET & MOLDED & BRACKET COLOR
PWR-90JL-02BK	BLACK
PWR-90JL-02RD	RED(PT201C)
PWR-90JL-02GN	GREEN(PT376C)
PWR-90JL-02BL	BLUE(PT286C)
PWR-90JL-02GR	GRAY(PANTONE421C)
PWR-90JL-02OR	ORANGE(PANTONE1565C)
PWR-90JL-02YE	YELLOW(PANTONE123C)

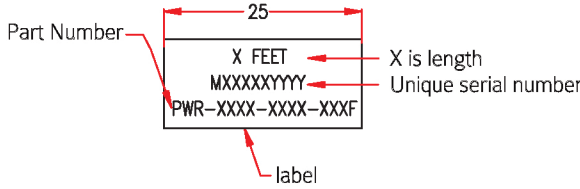

P1: TCS-C19 (UL) E489799
P2: TCS-C20 (UL) E489799

NOTE: All relevant materials are complied with RoHS directive .
The label is waterproof
THE MARKING IS CONCAVE LETTERING MOULD
MARKING: (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V E495164
C (UL) SJT 3/C 3.31MM²(12AWG) FT2 105°C 300V E495164 TCS

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 12AWG x 3C, OD 11.0mm, SJT Jacket	L-30mm	M304
2	MOLDED PVC 35P, BLACK		M304
	BRACKET: YST-038 BLACK	1	M767
	TERMINAL: 97607BS-1	1	M257
	TERMINAL: 97606BS-1	2	M257
1	MOLDED PVC 35P, BLACK		M304
	BRACKET: YST-037 BLACK	1	M767
	TERMINAL: 98739ABS-0	3	M257

APPROVED					Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001~1500mm ±25mm 1501~2100mm ±30mm 2100mm± ±40mm
CHECKED	HU	25/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	ZHU	25/SEP/17	PRODUCT NO.	PWR-90JL-02xx-xxxF	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm