


Cleandrape[®] Shear

Poly Hanging Tape

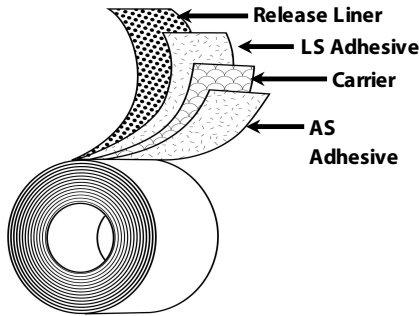

Carrier:	Scrim/Cloth
Adhesive:	Synthetic Rubber
Liner:	Polypropylene Film
Colors:	Clear
Specifications:	N/A
Standard Sizes:	48mm x 20yd, 72mm x 20yd

Applications

- Hanging and seaming poly sheeting to create containment areas during cleaning and remediation, construction and more
- Secures poly materials for paint masking and floor protection

Features

- Scrim Reinforcement
- Differential Synthetic Rubber Adhesive
- PP Release Liner

Benefits

- Good strength and low elongation for easy tear, application, and removal
- Conformable
- Air-side removes cleanly from most surfaces
- Aggressive, high tack adhesive on the liner side bonds to difficult surfaces
- Exceptional shear strength for hanging poly sheeting
- Hand tearable
- Easy to use

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	6.0 mils	0.15 mm	ASTM D-1000
Adhesion to Steel (LS)	55 oz/in	6.0 N/cm	PSTC-101
Adhesion to Steel (AS)	35 oz/in	3.8 N/cm	PSTC-101
Tensile Strength	19 lb/in	33.3 N/cm	ASTM D-1000
Shear Strength (AS/LS)	>48 / >10000 hrs		PSTC-107
Operating Temperature	40 to 200 °F	4 to 93 °C	

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.