



EG, GH & G SERIES

PROGRAM:	SOLIDWORKS		
UPDATED:	10/24/2025		
SALES REV:	Α		
SIZE:	A (8.5x11) (IN)		

DADT #	FIGURE	CERTIFICATION	GROUND WIRE	PIPE	CONDUIT	LENGTH	WIDTH	HEIGHT
PART #	FIGURE	CERTIFICATION	RANGE	SIZE (IN)	SIZE (IN)	(L) (IN)	(W) (IN)	(H) (IN)
EG-5	1	cULus	#2 STR - #10 SOL	1/2 - 1	1/2	2.19	2.08	3.13
EG-6	1	cULus	#2 STR - #10 SOL	1 1/4 - 2	1/2	3.63	2.08	4.51
EG-7	1	UL	2/0 STR - #10 SOL	1/2 - 1	3/4	2.27	2.14	3.61
EG-8	1	UL	2/0 STR - #10 SOL	1 1/4 - 2	3/4	3.59	2.14	4.44
EG-9	1	UL	3/0 STR - #10 SOL	1/2 - 1	1	2.28	2.14	3.78
EG-10	1	UL	3/0 STR - #10 SOL	1 1/4 - 2	1	3.61	2.08	4.61
EG-15	1	UL	#2 STR - #10 SOL	2 1/2 - 4	1/2	6.01	2.18	6.51
EG-24	1	UL	3/0 STR - #10 SOL	2 1/2 - 4	1	6.34	2.15	7.66
G-40	5	cULus	4/0 STR - #8 SOL	-	-	1.57	1.97	1.02
G-41	4	cULus	2/0 STR - #10 SOL	-	1/2	1.18	1.98	1.17
G-42	4	UL	3/0 STR - #10 SOL	-	3/4	1.24	2.37	1.78
G-43	4	UL	3/0 STR - #10 SOL	-	1	1.44	2.39	2.05
G-83	2	UL	3/0 STR - #10 SOL	1/2 - 1	1	2.27	8.25	3.65
G-79	2	UL	2/0 STR - #10 SOL	1/2 - 1	3/4	2.27	8.25	3.85
G-90	2	cULus	2/0 STR - #10 SOL	1/2 - 1	1/2	2.25	8.25	3.08
GH-50	3	UL	#4 STR - #10 SOL	-	1/2	1.09	1.26	1.03
GH-75	3	UL	2/0 STR - #10 SOL	-	3/4	1.28	1.51	1.32
GH-100	3	UL	3/0 STR - #10 SOL	-	1	1.53	1.61	1.54
GHM-50	4	UL	#2 STR - #10 SOL	-	1/2	1.08	2.08	1.63
GHM-75	4	UL	2/0 STR - #10 SOL	-	3/4	1.25	2.15	1.92
GHM-100	4	UL	3/0 STR - #10 SOL	-	1	1.47	2.11	2.15

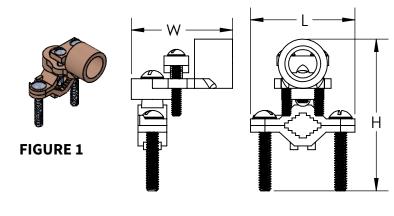


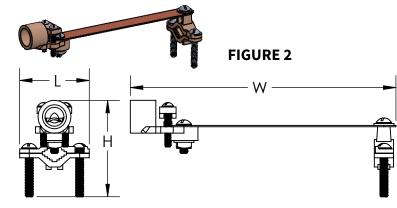

GROUND WIRE TORQUES					
WIRE RANGE	TORQUE				
<= #10 AWG	35 IN*LB				
#8 AWG	40 IN*LB				
#4 - 3/0 AWG	50 IN*LB				
#6 - #4 AWG	45 IN*LB				

FEATURES:

- For grounding rigid conduit systems
- Clamp body is made from Copper Alloy
- Pre-assembled zinc-plated steel screws
- UL467 listed, Grounding and Bonding
- Class B/C and solid conductors






FIGURE 4

