


## Multi-Purpose Duct Tape

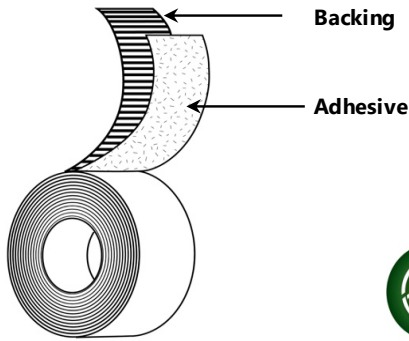

- Backing:** PE Coated Cloth
- Adhesive:** Rubber
- Liner:** N/A
- Colors:** Silver, Black
- Specifications:** Tested in accordance with UL 723
- Standard Sizes:** 48mm x 55m, 72mm x 55m

### Applications

- General repair
- General purpose construction uses
- Bundling, patching, and mending
- Seaming and hanging polyethylene sheeting
- Emergency tape for automotive applications

### Features

- PE-Coated Cloth Backing
- Natural Rubber Adhesive
- Low VOC Content

### Benefits

- Conforms well to irregular surfaces
- Resists twisting and curling
- High adhesion and holding power for both rough and smooth surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED<sup>®</sup>

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	10.0 mils	0.254 mm	ASTM D-1000
<b>Adhesion to Steel</b>	95 oz/in	67.08 N/cm	PSTC-101
<b>Tensile Strength</b>	24 lb/in	271.16 N/cm	ASTM D-1000
<b>Elongation</b>	21%		ASTM D-1000
<b>Operating Temperature</b>	40 to 200 °F	4 to 93 °C	
<b>VOC Content</b>	<1 g/L		

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which Berry Global assumes any legal responsibility.