

2"

45365 MINI SQUARE GIMBAL



PROJECT:

TYPE:

DATE:

NOTES:

ADJUSTABLE  
CCT

2700K . 3000K . 3500K . 4000K . 5000K

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

## SPECIFICATIONS

### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

### DIMENSIONS

- Cut hole: Ø2 1/8".
- Fixture: Ø2 1/2" x 1 1/2"H.

### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F) (-20°C~40°C).

### LIGHT MODULE

- 1 x 5W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 373 lm | 410 lm | 421 lm | 426 lm | 429 lm

### CERTIFICATIONS



## ORDERING GUIDE

MODEL	FINISH
45365-027	Black
45365-010	White



Ø2 1/8"	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
Ø2 1/8"	5W	Up to 429	CCT Selectable	TRIAC/ELV	90+	38°	30°



### FINISHES



### PRODUCT DIMENSIONS

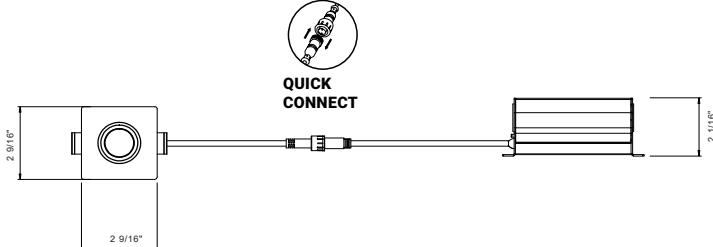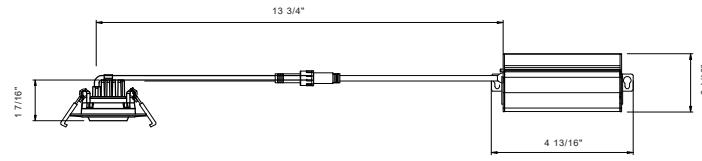

## ACCESSORIES



45612-015  
60"  
3 pin Connector



45366-017  
NEW CONSTRUCTION PLATE  
Mounting kit includes bars  
9" x 6 3/4"

Ø2 1/8"  
Ø2 7/8"  
Ø3 3/4"  
Ø5 1/4"





47205-017  
15W REMOTE  
EMERGENCY  
BACKUP BATTERY



NO IC BOX  
REQUIRED

### PHOTOMETRICS

#### Imperial

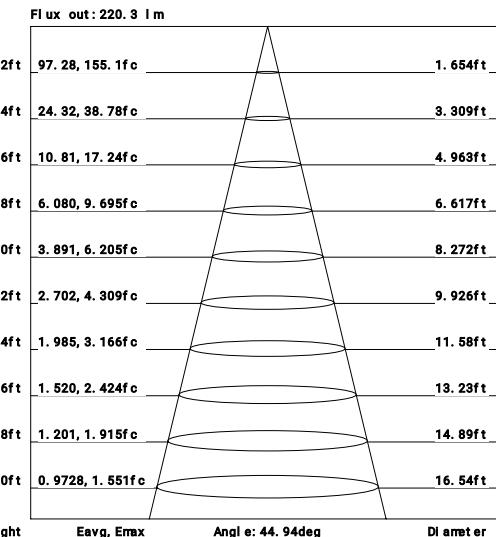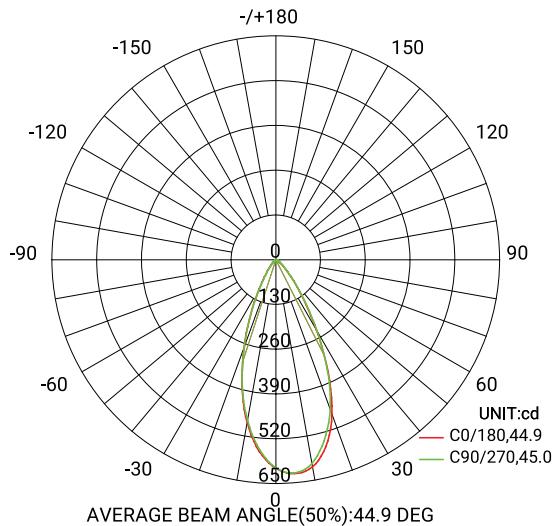

#### Metrics

