


## Moisture Barrier Tape

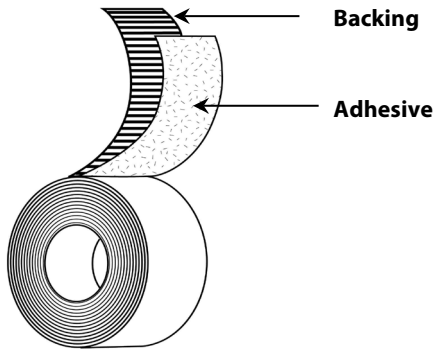

<b>Backing:</b>	Polymeric Composite
<b>Adhesive:</b>	Black Blended Rubber
<b>Temp. Resistance:</b>	105 °C (continuous)
<b>Colors:</b>	Black
<b>Standard Sizes:</b>	48mm x 55m, 72mm x 55m
<b>Specifications:</b>	Chrysler MS-CH69, MS-2929 Ford Mat. ESBM3G58A GM 9985159 VMSG-2857 RoHS Compliant

### Applications

- Moisture barrier in automotive, appliance and marine manufacturing
- Wire harness splice insulation
- Spot taping

### Features

- Composite Backing
- Rubber Adhesive

### Benefits

- Easy tear and application
- Excellent conformability for wrapping
- Moisture resistant
- High adhesion
- Performs in high humidity environments
- Low VOC

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	10.5	mils	0.267	mm	ASTM D-1000
<b>Adhesion to Steel</b>	43	oz/in	4.70	N/cm	PSTC-1
<b>Adhesion to Backing</b>	32	oz/in	3.50	N/cm	PSTC-1
<b>Tensile Strength</b>	32	lb/in	56.00	N/cm	ASTM D-1000
<b>Unwind Force</b>	29	oz/in	3.17	N/cm	PSTC-8
<b>Elongation</b>	6%				ASTM D-1000
<b>Moisture VTR</b>	0.8 g/100in <sup>2</sup> /24hrs				FLTMBUI-1
<b>Water Penetration</b>	0.3 oz		8.3 g		FLTMBUI-2
<b>Temperature Rating</b>	105 °C				
<b>Shelf Life at 25 °C</b>	24 Months				

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Global's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY GLOBAL assumes any legal responsibility.