


## Double-Coated Foam Tape

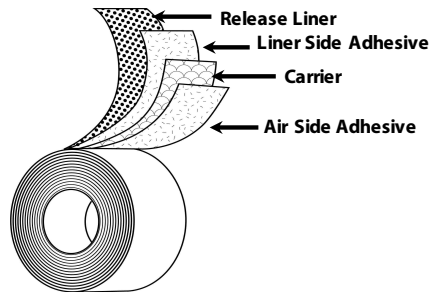

**Liner:** 60# Densified Kraft

**Liner Side Adhesive:** Rubber (I920)

**Backing/Carrier:** 4lb Density White Closed-Cell Cross-Linked PE Foam

**Air Side Adhesive:** Rubber (I920)

Note: Same product is also available in Black as **B141**

### Applications

- Mounting signs, wire clips, moldings, reflectors, molded and extruded plastics, hardware, etc.

Features	Benefits
<ul style="list-style-type: none"> <li>• Rubber Adhesive</li> </ul>	<ul style="list-style-type: none"> <li>• Moderate tack</li> <li>• Excellent shear strength</li> <li>• Bonds well to certain LSE substrates</li> </ul>
<ul style="list-style-type: none"> <li>• PE Foam Carrier</li> </ul>	<ul style="list-style-type: none"> <li>• Facilitates gap filling for bonding to irregular surfaces</li> <li>• Closed cell foam resists water/oil absorption</li> </ul>
<ul style="list-style-type: none"> <li>• 60# Kraft Liner</li> </ul>	<ul style="list-style-type: none"> <li>• Easily die-cut</li> </ul>

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Overall Thickness (w/liner)</b>	39.5 mils	1.003 mm	PSTC 133
<b>Air-Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Carrier Thickness</b>	32.0 mils	0.813 mm	PSTC 133
<b>Liner Side Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Liner Thickness</b>	3.5 mils	0.089 mm	PSTC 133
<b>Adhesion to Steel (Cohesive)</b>	160 oz/in	17.50 N/cm	PSTC 101 Mod - 1 mil PET
<b>Shear Strength</b>	>14 Days no creep		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	30 to 150 °F	-1 to 66 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.