



FEATURES:

1. Compact, versatile and durable
2. 90 °C and 600V.
3. High-impact bases
4. One-piece connectors .
5. No assembly on job site.
6. Default SCCR Rating 10,000 Amps.
7. Connector Blok™ covers are available in 3 sizes and fits all styles and configurations.

SPECIFICATIONS:

1. CSA
2. UL Recognize.

AS, AM, AL Series: Splicer Reducer, Primary Secondary

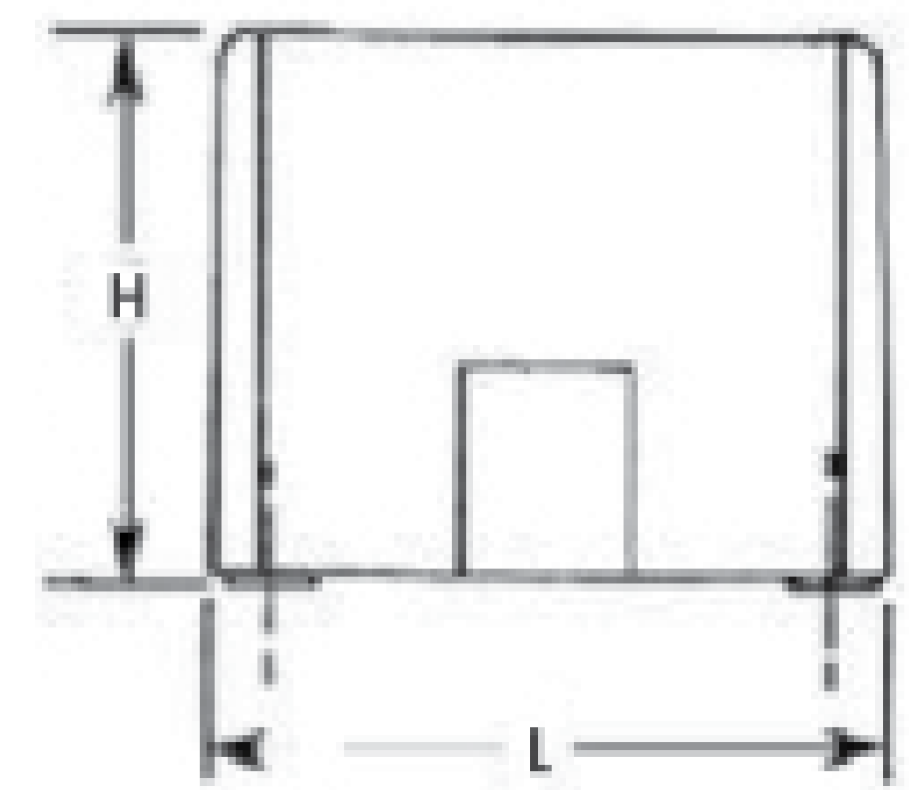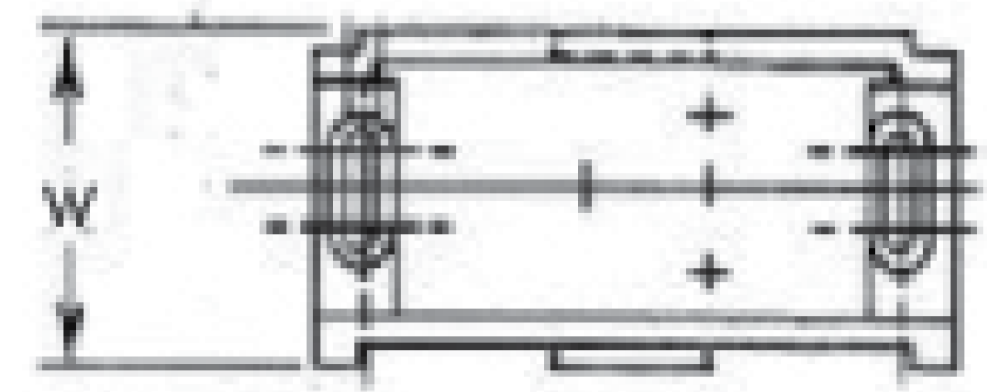

CAT. NO.	FIG. NO.	CONFIGURATION		AMPS PER POLE	LENGTH (L) (IN.)	HEIGHT (W) (IN.)	WIDTH (H) (IN.)	STD. PKG. QTY.	STD. CTN. QTY.		
		DRAWING	PRIMARY LINE SIDE							DRAWING	SECONDARY LOAD SIDE
AS-I1-I1	1		2-14 AWG		2-14 AWG	115	2.900	2.714	1.040	1	3
AS-K1-K1	1		2/0-14 AWG		2/0-14 AWG	175	2.900	2.714	1.040	1	3
AM-N1-N1	1		250MCM-6 AWG		250MCM-6 AWG	310	4.000	2.620	1.710	1	3
AM-P1-P1	1		350MCM-6 AWG		350MCM-6 AWG	350	4.000	2.620	1.710	1	3
AM-R1-R1	1		500MCM-4 AWG		500MCM-4 AWG	380	4.000	2.620	1.710	1	3
AS-K2-K2	1		2/0-14 AWG		2/0-14 AWG	350	2.900	2.714	1.040	1	3
AL-P2-P2	1		350MCM-6 AWG		350MCM-6 AWG	620	5.500	3.250	2.900	1	3
AL-R2-R2	1		500MCM-4 AWG		500MCM-4 AWG	760	5.500	3.250	2.900	1	3
ACCESSORIES		CONNECTOR BLOK COVER								STD. CTN. QTY.	
CS	2	For use with connector Block AS Series								12	
CM	2	For use with connector Block AM Series								9	
CL	2	For use with connector Block AL Series								6	